

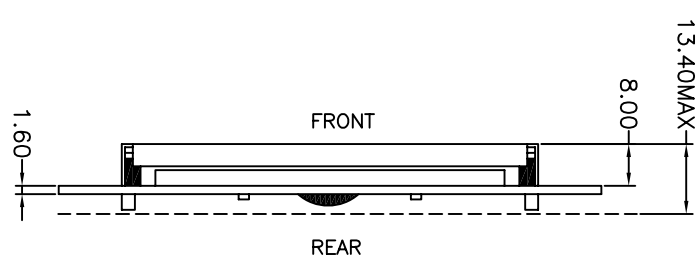


REV.	CHANGE CONTENT	BY	DATE

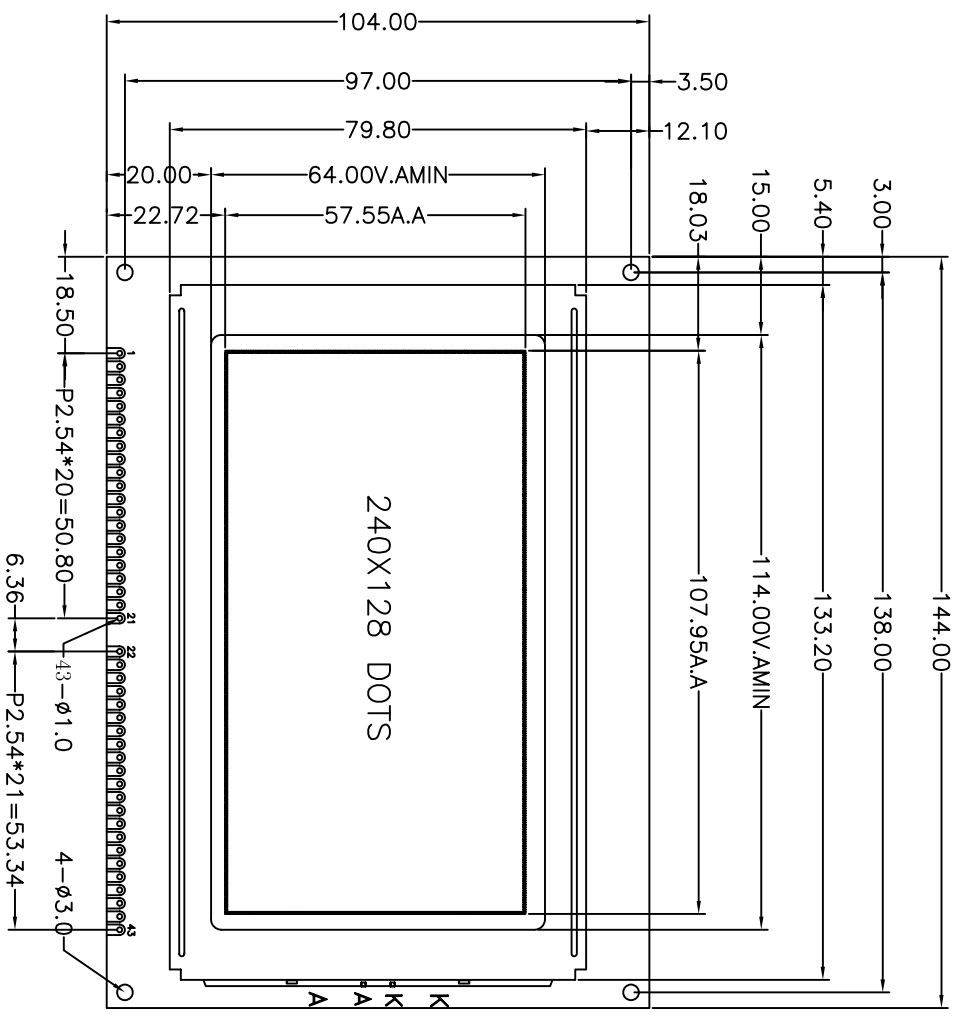

PIN NO.	1	2	3	4	5	6	7
Symbol	FG	VSS	VDD	VO	WR	RD	CE
PIN NO.	8	9	10-17	18	19	20	21
Symbol	C/D	RET	DB0-DB7	FS	VEE	LED+	LED-
PIN NO.	22	23	24	25	26-33	34	35
Symbol	LED-	LED+	VEE	FS	DB7-DB0	RET	NC
PIN NO.	36	37	38	39	40	41	42
Symbol	C/D	CE	RD	WR	VO	VDD	VSS
PIN NO.	43						
Symbol	FG						

NOTE: 1. Pin No.18 FS: FONT SELECT
FS=L8X8 Character Font



- NOTE:
- 1 DISPLAY TYPE : STN/BLUE
 - 2 VIEWING DIRECTION : 6 O'CLOCK
 - 3 POLARIZER MODE : TRANSMISSIVE/NEGATIVE
 - 4 DRIVE METHOD : 1/128 DUTY 1/12 BIAS
 - 5 OPERATING VOLTAGE : 18.5V(FOR REFERENCE VOLTAGE)
 - 6 OPERATING TEMP : 0°C--+50°C
 - 7 STORAGE TEMP : -20°C--+60°C
 - 8 CONNECTION : ZEBRA
 - 9 BACKLIGHT:WHITE,5.0V/72mA
 - 10 CONTROL CHIP:TE963C
 11. LOGIC VOLTAGE:5.0V

TOLERANCE
>0~6 ±0.10
>6~80 ±0.20
>80~240 ±0.30
>240~400 ±0.50
// ⊥ ⊙ ±0.10



HTDISPLAY CO., LTD.

DESIGN	LZM	DATE	STANDARD	TECHNOLOGY	Q. A	APPROVED
>80~240 ±0.30		05.11.28	STANDARD	TECHNOLOGY	Q. A	
>240~400 ±0.50						
// ⊥ ⊙ ±0.10						

DRAWING No.: HG24012802C-bT60L-VA
DRAWING TITLE: LCD MODULE

REV.	SCALE
REV. : A	SCALE : -
PROJECTION:	UNIT : MM
SHEET : 1/1	