



REV.	CHANGE CONTENT	BY	DATE

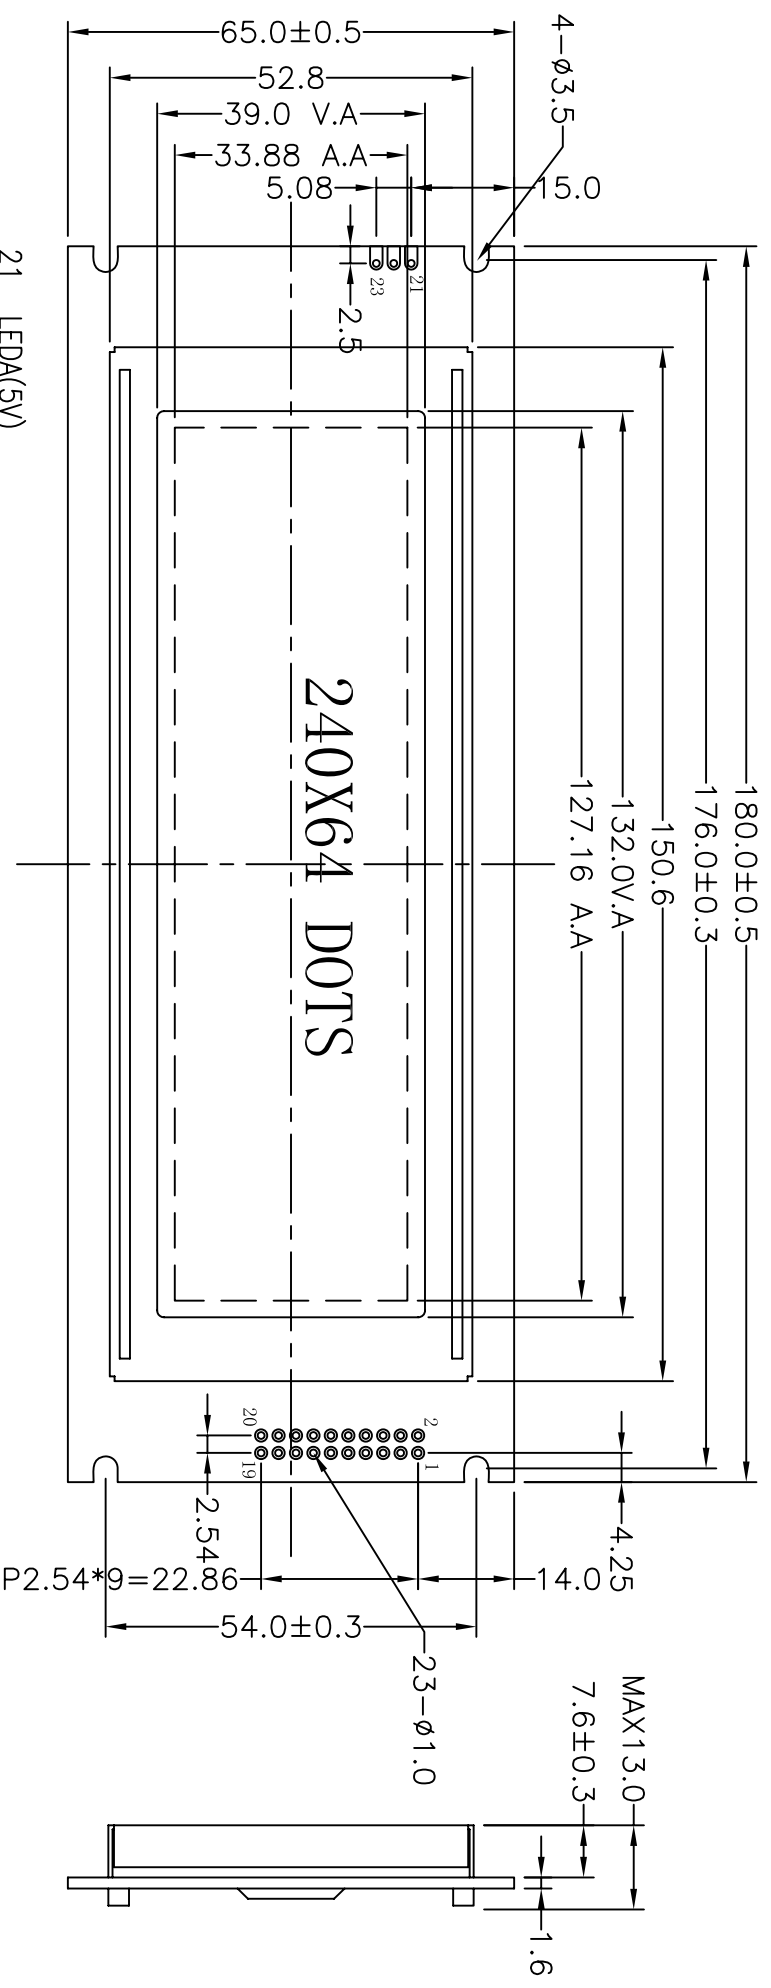

- 21 LEDA(5V)
- 22 NC
- 23 LEDK(0V)

NOTE:  
 DISPLAY TYPE : STN TRANSMISSIVE-NEGATIVE-BLUE  
 VIEWING DIRECTION : 6: 00  
 OPERATING VOLT. : VOP=11.5V  
 OPERATING TEMP. : -20°C ~ +70°C  
 STORAGE TEMP. : -30°C ~ +80°C  
 DRIVE METHOD : 1/64 DUTY 1/9 BIAS  
 BACKLIGHT : LED white  
 CONTROLLER : T6963C

Pin No.	1	2	3	4	5	6	7	8	9	10
Symbol	FG	VSS	VDD	Vo	/WR	/RD	/CE	C/D	NC	/RST
Pin No.	11	12	13	14	15	16	17	18	19	20
Symbol	DB0	DB1	DB2	DB3	DB4	DB5	DB6	DB7	FS	NC



OPERATING VOLT. : VOP=11.5V  
 OPERATING TEMP. : -20°C ~ +70°C  
 STORAGE TEMP. : -30°C ~ +80°C  
 DRIVE METHOD : 1/64 DUTY 1/9 BIAS  
 BACKLIGHT : LED white  
 CONTROLLER : T6963C

**HTD**  
**HTDISPLAY CO., LTD.**

TOLERANCE	>0~6 ±0.10	>6~80 ±0.20	>80~240 ±0.30	>240~400 ±0.50	// L ⊙ ±0.10
DESIGN	LI JINTANG	05.10.22	STANDARD	TECHNOLOGY	Q.A
CHECKED					
APPROVED					
DRAWING No. :	HG2406401C-bT62L-VA				
DRAWING TITLE:	LCD MODULE				
REV. :	SCALE :	-			
PROJECTION:	UNIT :	MM			
	SHEET :	1/1			