

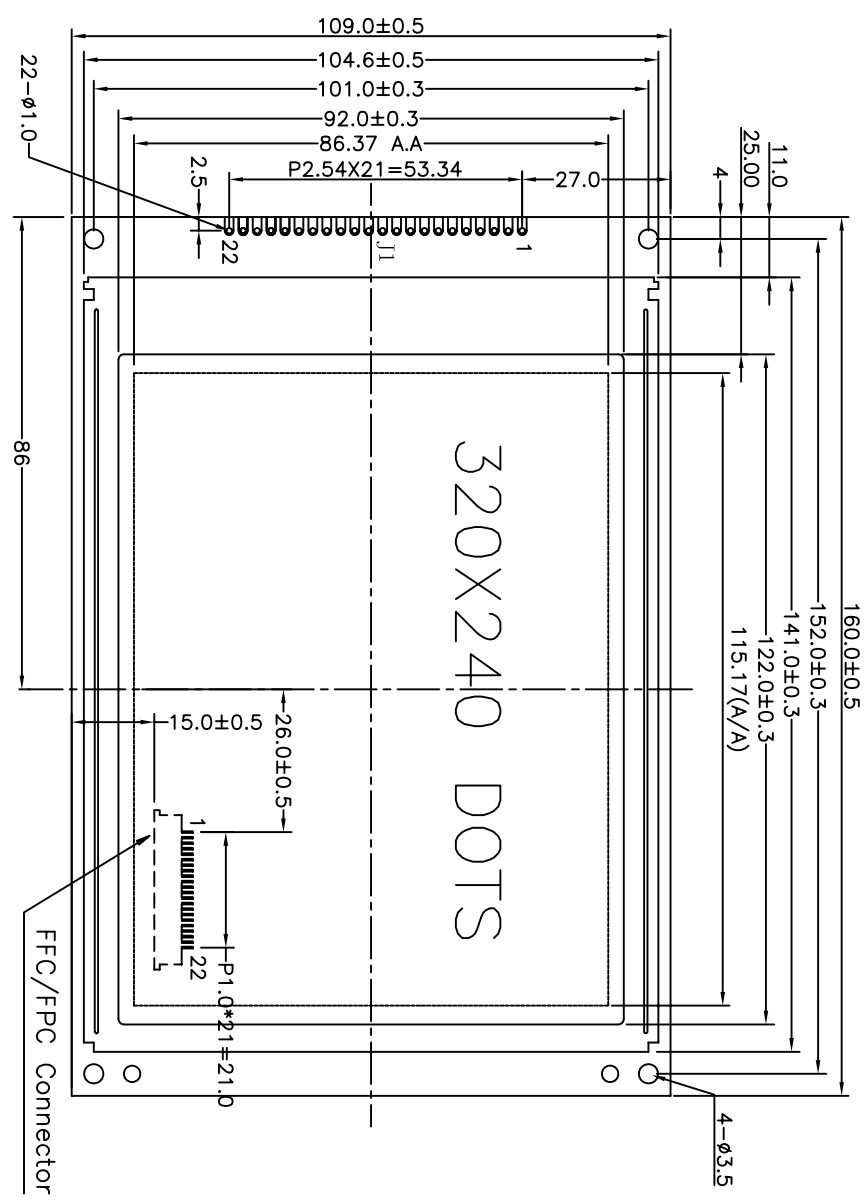


| REV. | CHANGE CONTENT | BY | DATE |
|------|----------------|----|------|
| | | | |
| | | | |
| | | | |



J1 ASSIGNMENTS

| PIN SYMBOL | ASSIGNMENT |
|------------|------------|
| 1 | VSS |
| 2 | VDD |
| 3 | V0 |
| 4 | A0 |
| 5 | /MR(R/W) |
| 6 | /RD(E) |
| 7 | DB0 |
| 8 | DB1 |
| 9 | DB2 |
| 10 | DB3 |
| 11 | DB4 |
| 12 | DB5 |
| 13 | DB6 |
| 14 | DB7 |
| 15 | /CS |
| 16 | /RES |
| 17 | VEE |
| 18 | SEL1 |
| 19 | LED+ |
| 20 | LED- |
| 21 | NC |
| 22 | NC |

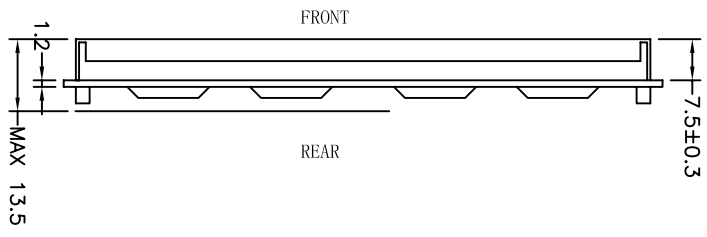

NOTE:

- DISPLAY TYPE : STN TRANSMISSIVE-NAGTIVE-BLUE
- VIEWING DIRECTION : 6: 00
- OPERATING VOLT. : VOP=23.0V
- OPERATING TEMP. : -20°C~+70°C
- STORAGE TEMP. : -30°C~+80°C
- DRIVE METHOD : 1/240 DUTY 1/16 BIAS VDD:5.0V
- BACKLIGHT : LED(white) Vf:5.0V
- CONTROLLER : RA8835P3N

| TOLERANCE |
|----------------|
| >0~6 ±0.10 |
| >6~80 ±0.20 |
| >80~240 ±0.30 |
| >240~400 ±0.50 |
| // L.0 ±0.10 |



HTDISPLAY CO., LTD.

| DESIGN | JHG | 20061212 | STANDARD | REV. : A | SCALE : - |
|----------|-----|----------|------------|-------------|-------------|
| CHECKED | | | TECHNOLOGY | PROJECTION: | UNIT : MM |
| APPROVED | | | Q.A | | SHEET : 1/1 |

DRAWING No. : HG32024001S-BT62L-VA
 DRAWING TITLE: LCDM DRAWING
 FILE NO.: 8