










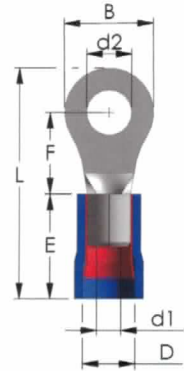




























DOUBLE CRIMP PVC INSULATED RING TERMINALS

1. MAXIMUM ELECTRICAL RATING : 600 VOLTS
2. MAXIMUM TEMPERATURE : 75°C
3. TERMINAL MATERIAL : COPPER
4. PLATING : ELECTRO TIN PLATED
5. REINFORCEMENT SLEEVE : **D TYPE SLEEVE**
6. INSULATION MATERIAL : VINYL (PVC)



3 pcs design



WIRE RANGE AWG / mm ²	ITEM NO.	UL	STUD SIZE d2	DIMENSIONS inch (mm)						
				B	L	F	E	D	d1	t
 22~16 AWG 0.5~1.5 mm ²	R1-2VD		#2 (2.2)	.260 (6.6)	.772 (19.6)	.248 (6.3)	.394 (10.0)	.169 (4.3)	.067 (1.7)	.030 (0.75)
	R1-3VD		#4 (3.2)	.217 (5.5)	.657 (16.7)	.157 (4.0)				
	R1-3.5SVD		#6 (3.7)	.217 (5.5)	.657 (16.7)	.157 (4.0)				
	R1-3.5MVD		#6 (3.7)	.260 (6.6)	.772 (19.6)	.248 (6.3)				
	R1-3.5LVD		#6 (3.7)	.315 (8.0)	.827 (21.0)	.276 (7.0)				
	R1-4SVD		#8 (4.3)	.260 (6.6)	.772 (19.6)	.248 (6.3)				
	R1-4LVD		#8 (4.3)	.315 (8.0)	.827 (21.0)	.276 (7.0)				
	R1-5VD		#10 (5.3)	.315 (8.0)	.827 (21.0)	.276 (7.0)				
	R1-6VD		1/4 (6.5)	.457 (11.6)	1.055 (26.8)	.437 (11.1)				
	R1-8VD		5/16 (8.4)	.457 (11.6)	1.055 (26.8)	.437 (11.1)				
	R1-10VD		3/8 (10.5)	.535 (13.6)	1.209 (30.7)	.547 (13.9)				
	R1-12VD		1/2 (13.0)	.756 (19.2)	1.402 (35.6)	.630 (16.0)				
 16~14 AWG 1.5~2.5 mm ²	R2-2VD		#2 (2.2)	.252 (6.4)	.689 (17.5)	.169 (4.3)	.394 (10.0)	.201 (5.1)	.091 (2.3)	.031 (0.8)
	R2-3VD		#4 (3.2)	.252 (6.4)	.689 (17.5)	.169 (4.3)				
	R2-3.5SVD		#6 (3.7)	.252 (6.4)	.689 (17.5)	.169 (4.3)				
	R2-3.5MVD		#6 (3.7)	.260 (6.6)	.768 (19.5)	.248 (6.3)				
	R2-3.5LVD		#6 (3.7)	.335 (8.5)	.866 (22.0)	.307 (7.8)				
	R2-4SVD		#8 (4.3)	.260 (6.6)	.768 (19.5)	.248 (6.3)				
	R2-4LVD		#8 (4.3)	.335 (8.5)	.866 (22.0)	.307 (7.8)				
	R2-5SVD		#10 (5.3)	.335 (8.5)	.866 (22.0)	.307 (7.8)				
	R2-5LVD		#10 (5.3)	.374 (9.5)	.866 (22.0)	.287 (7.3)				
	R2-6VD		1/4 (6.5)	.472 (12.0)	1.063 (27.0)	.433 (11.0)				
	R2-8VD		5/16 (8.4)	.472 (12.0)	1.063 (27.0)	.433 (11.0)				
	R2-10VD		3/8 (10.5)	.535 (13.6)	1.209 (30.7)	.547 (13.9)				
R2-12VD		1/2 (13.0)	.756 (19.2)	1.402 (35.6)	.630 (16.0)					
 12~10 AWG 4~6 mm ²	R5-3VD		#4 (3.2)	.283 (7.2)	.866 (22.0)	.232 (5.9)	.492 (12.5)	.268 (6.8)	.134 (3.4)	.039 (1.0)
	R5-3.5SVD		#6 (3.7)	.283 (7.2)	.866 (22.0)	.232 (5.9)				
	R5-3.5LVD		#6 (3.7)	.374 (9.5)	1.004 (25.5)	.327 (8.3)				
	R5-4SVD		#8 (4.3)	.283 (7.2)	.866 (22.0)	.232 (5.9)				
	R5-4LVD		#8 (4.3)	.374 (9.5)	1.004 (25.5)	.327 (8.3)				
	R5-5VD		#10 (5.3)	.374 (9.5)	1.004 (25.5)	.327 (8.3)				
	R5-6VD		1/4 (6.5)	.472 (12.0)	1.142 (29.0)	.413 (10.5)				
	R5-8VD		5/16 (8.4)	.591 (15.0)	1.327 (33.7)	.539 (13.7)				
	R5-10VD		3/8 (10.5)	.591 (15.0)	1.327 (33.7)	.539 (13.7)				
	R5-12VD		1/2 (13.0)	.756 (19.2)	1.500 (38.1)	.630 (16.0)				