


NYLON INSULATED RING TERMINALS

1. MAXIMUM ELECTRICAL RATING : 600 VOLTS
2. MAXIMUM TEMPERATURE : 105°C
3. TERMINAL MATERIAL : COPPER
4. PLATING : ELECTRO TIN PLATED
5. INSULATION MATERIAL : EASY ENTRY NYLON



2 pcs design

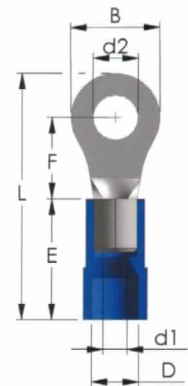

WIRE RANGE AWG / mm ²	ITEM NO.	UL	STUD SIZE d2	DIMENSIONS inch (mm)						
				B	L	F	E	D	d1	t
 22~16 AWG 0.5~1.5 mm ²	R1-2A		#2 (2.2)	.260 (6.6)	.811 (20.6)	.248 (6.3)	.433 (11.0)	.161 (4.1)	.067 (1.7)	.030 (0.75)
	R1-3A		#4 (3.2)	.217 (5.5)	.697 (17.7)	.157 (4.0)				
	R1-3.5SA		#6 (3.7)	.217 (5.5)	.697 (17.7)	.157 (4.0)				
	R1-3.5MA		#6 (3.7)	.260 (6.6)	.811 (20.6)	.248 (6.3)				
	R1-3.5LA		#6 (3.7)	.315 (8.0)	.866 (22.0)	.276 (7.0)				
	R1-4SA		#8 (4.3)	.260 (6.6)	.811 (20.6)	.248 (6.3)				
	R1-4LA		#8 (4.3)	.315 (8.0)	.866 (22.0)	.276 (7.0)				
	R1-5A		#10 (5.3)	.315 (8.0)	.866 (22.0)	.276 (7.0)				
	R1-6A		1/4 (6.5)	.457 (11.6)	1.094 (27.8)	.437 (11.1)				
	R1-8A		5/16 (8.4)	.457 (11.6)	1.094 (27.8)	.437 (11.1)				
	R1-10A		3/8 (10.5)	.535 (13.6)	1.248 (31.7)	.547 (13.9)				
 16~14 AWG 1.5~2.5 mm ²	R2-2A		#2 (2.2)	.252 (6.4)	.728 (18.5)	.169 (4.3)	.433 (11.0)	.177 (4.5)	.091 (2.3)	.031 (0.8)
	R2-3A		#4 (3.2)	.252 (6.4)	.728 (18.5)	.169 (4.3)				
	R2-3.5SA		#6 (3.7)	.252 (6.4)	.728 (18.5)	.169 (4.3)				
	R2-3.5MA		#6 (3.7)	.260 (6.6)	.807 (20.5)	.248 (6.3)				
	R2-3.5LA		#6 (3.7)	.335 (8.5)	.906 (23.0)	.307 (7.8)				
	R2-4SA		#8 (4.3)	.260 (6.6)	.807 (20.5)	.248 (6.3)				
	R2-4LA		#8 (4.3)	.335 (8.5)	.906 (23.0)	.307 (7.8)				
	R2-5SA		#10 (5.3)	.335 (8.5)	.906 (23.0)	.307 (7.8)				
	R2-5LA		#10 (5.3)	.374 (9.5)	.906 (23.0)	.287 (7.3)				
	R2-6A		1/4 (6.5)	.472 (12.0)	1.102 (28.0)	.433 (11.0)				
	R2-8A		5/16 (8.4)	.472 (12.0)	1.102 (28.0)	.433 (11.0)				
 12~10 AWG 4~6 mm ²	R5-3A		#4 (3.2)	.283 (7.2)	.886 (22.5)	.232 (5.9)	.512 (13.0)	.256 (6.5)	.134 (3.4)	.039 (1.0)
	R5-3.5SA		#6 (3.7)	.283 (7.2)	.886 (22.5)	.232 (5.9)				
	R5-3.5LA		#6 (3.7)	.374 (9.5)	1.024 (26.0)	.327 (8.3)				
	R5-4SA		#8 (4.3)	.283 (7.2)	.886 (22.5)	.232 (5.9)				
	R5-4LA		#8 (4.3)	.374 (9.5)	1.024 (26.0)	.327 (8.3)				
	R5-5A		#10 (5.3)	.374 (9.5)	1.024 (26.0)	.327 (8.3)				
	R5-6A		1/4 (6.5)	.472 (12.0)	1.161 (29.5)	.413 (10.5)				
	R5-8A		5/16 (8.4)	.591 (15.0)	1.346 (34.2)	.539 (13.7)				
	R5-10A		3/8 (10.5)	.591 (15.0)	1.346 (34.2)	.539 (13.7)				
	R5-12A		1/2 (13.0)	.756 (19.2)	1.520 (38.6)	.630 (16.0)				