










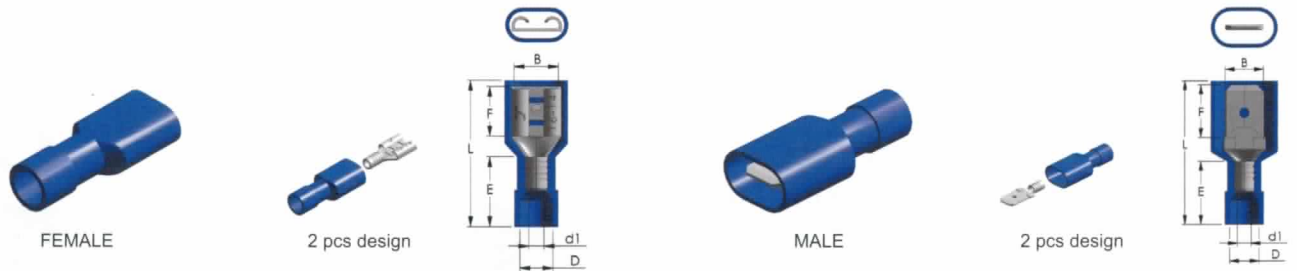



FULLY INSULATED NYLON FEMALE & MALE DISCONNECTS


1. MAXIMUM ELECTRICAL RATING : 300 VOLTS
2. MAXIMUM TEMPERATURE : 105°C
3. TERMINAL MATERIAL : BRASS
4. PLATING : ELECTRO TIN PLATED
5. INSULATION MATERIAL : EASY ENTRY NYLON









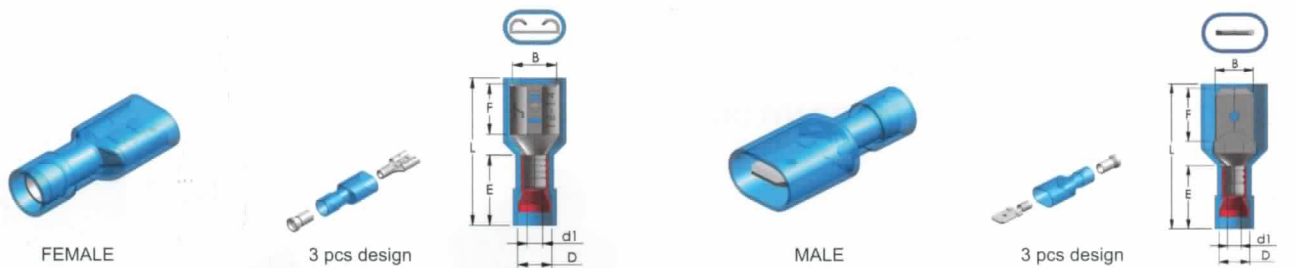





WIRE RANGE AWG / mm ²	ITEM NO.	UL	DIMENSIONS inch (mm)							
			NEMA TAB	B	F	L	E	D	d1	t
 22~16 AWG 0.5~1.5 mm ²	F1-6.4AF		.032*.250 (0.8*6.4)	.260 (6.6)	.311 (7.9)	.866 (22.0)	.413 (10.5)	.165 (4.2)	.067 (1.7)	.016 (0.4)
 16~14 AWG 1.5~2.5 mm ²	F2-6.4AF							.193 (4.9)	.091 (2.3)	.016 (0.4)
 12~10 AWG 4~6 mm ²	F5-6.4AF							.965 (24.5)	.512 (13.0)	.256 (6.5)
 22~16 AWG 0.5~1.5 mm ²	M1-6.4AF		.032*.250 (0.8*6.4)	.250 (6.35)	.311 (7.9)	.925 (23.5)	.413 (10.5)	.165 (4.2)	.067 (1.7)	.016 (0.4)
 16~14 AWG 1.5~2.5 mm ²	M2-6.4AF							.193 (4.9)	.091 (2.3)	.016 (0.4)
 12~10 AWG 4~6 mm ²	M5-6.4AF							1.063 (27.0)	.512 (13.0)	.256 (6.5)

DOUBLE CRIMP FULLY INSULATED NYLON FEMALE & MALE DISCONNECTS

REINFORCEMENT SLEEVE : C TYPE SLEEVE ~~~ EASY ENTRY SLEEVE ~~~



WIRE RANGE AWG / mm ²	ITEM NO.	UL	DIMENSIONS inch (mm)							
			NEMA TAB	B	F	L	E	D	d1	t
 22~16 AWG 0.5~1.5 mm ²	F1-6.4AFC		.032*.250 (0.8*6.4)	.260 (6.6)	.311 (7.9)	.866 (22.0)	.413 (10.5)	.165 (4.2)	.067 (1.7)	.016 (0.4)
 16~14 AWG 1.5~2.5 mm ²	F2-6.4AFC							.193 (4.9)	.091 (2.3)	.016 (0.4)
 12~10 AWG 4~6 mm ²	F5-6.4AFC							.965 (24.5)	.512 (13.0)	.256 (6.5)
 22~16 AWG 0.5~1.5 mm ²	M1-6.4AFC		.032*.250 (0.8*6.4)	.250 (6.35)	.311 (7.9)	.925 (23.5)	.413 (10.5)	.165 (4.2)	.067 (1.7)	.016 (0.4)
 16~14 AWG 1.5~2.5 mm ²	M2-6.4AFC							.193 (4.9)	.091 (2.3)	.016 (0.4)
 12~10 AWG 4~6 mm ²	M5-6.4AFC							1.063 (27.0)	.512 (13.0)	.256 (6.5)