


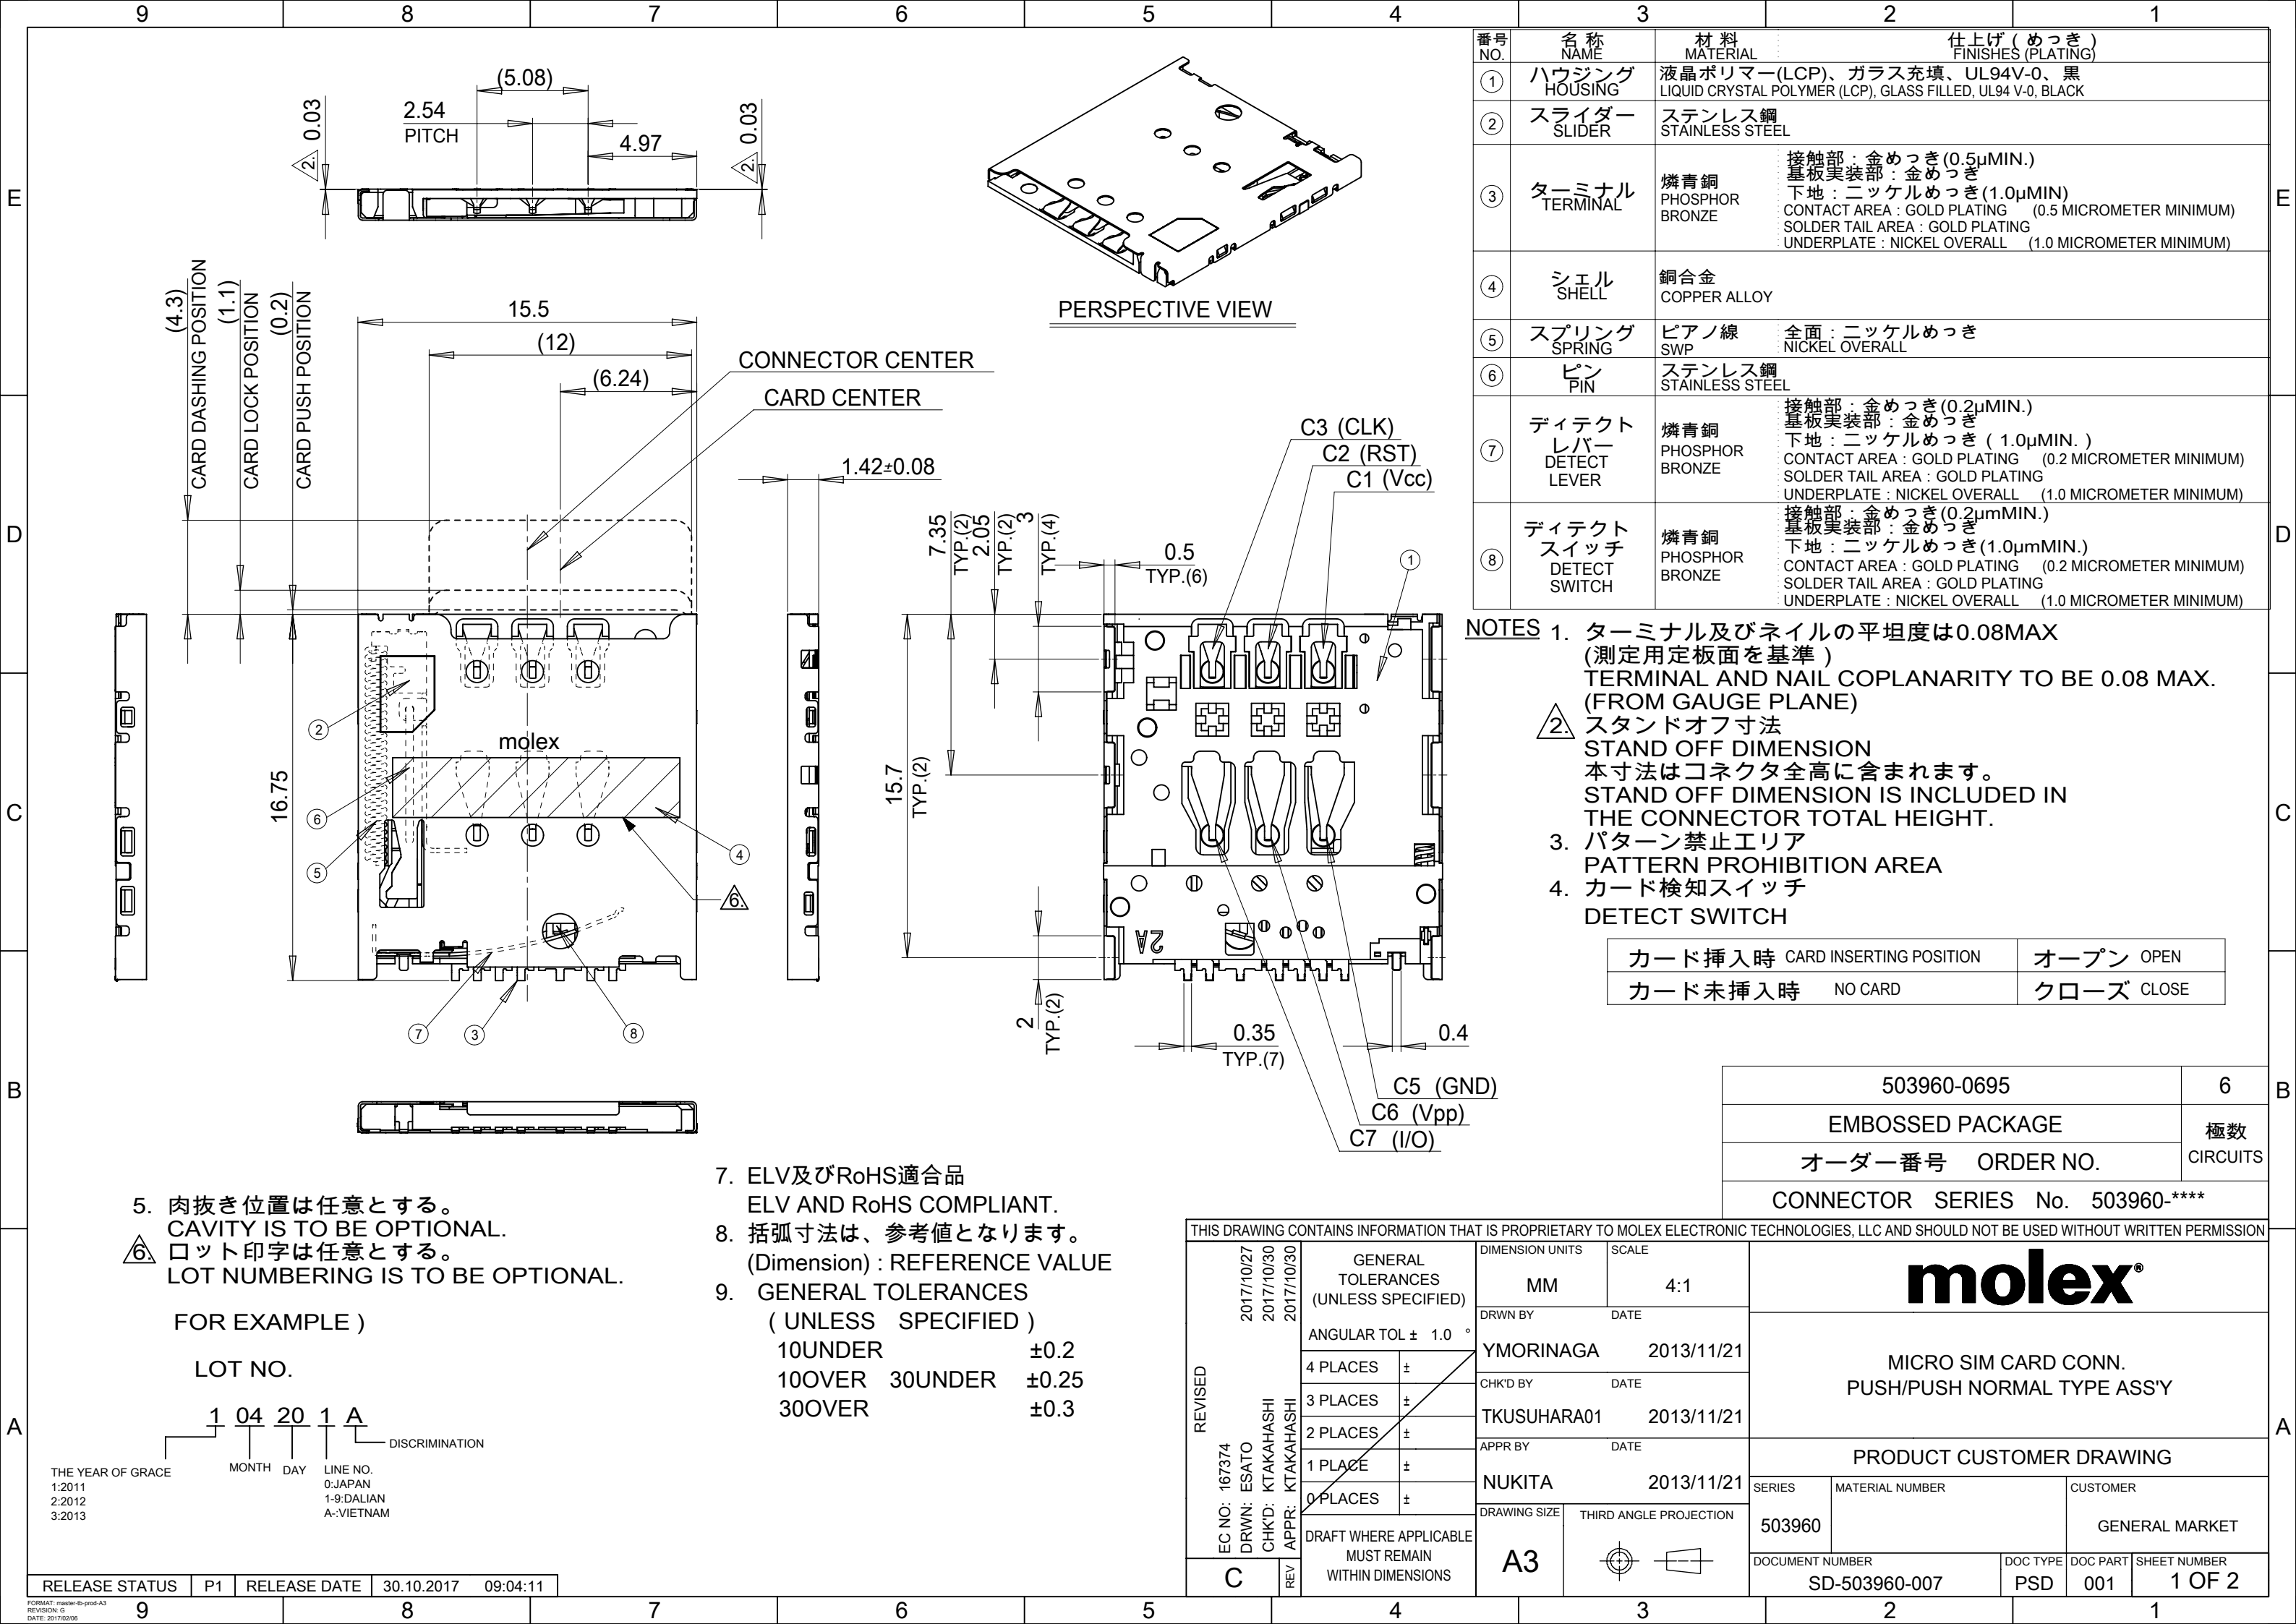

9 8 7 6 5 4 3 2 1

E

D


C

B

A

9 8 7 6 5 4 3 2 1

FORMAT: master-ib-prod-A3
REVISION: 5
DATE: 2017/02/08

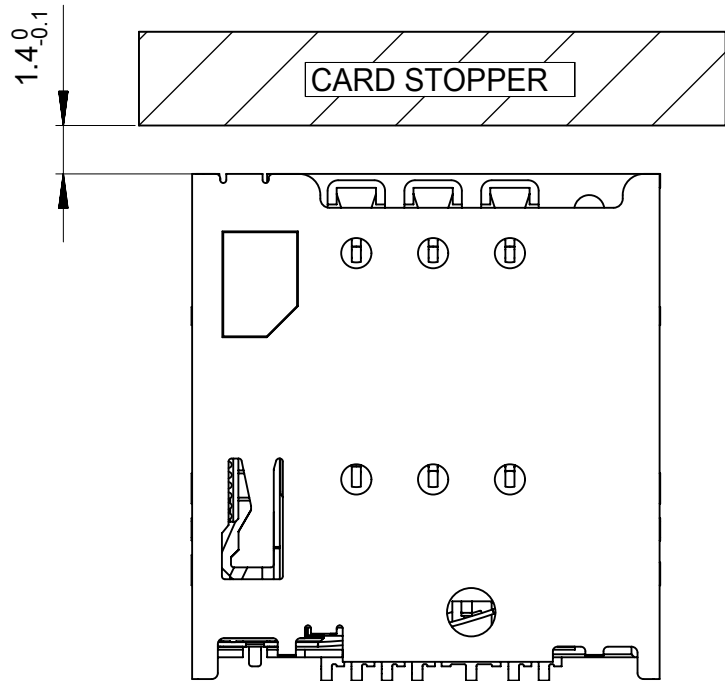


RECOMMENDED CARD STOPPER POSITION(SCALE:4:1)




パターン禁止エリア
PATTERN PROHIBITION AREA

RECOMMENDED PCB PATTERN LAYOUT
(GENERAL TORERANCE : ±0.05)

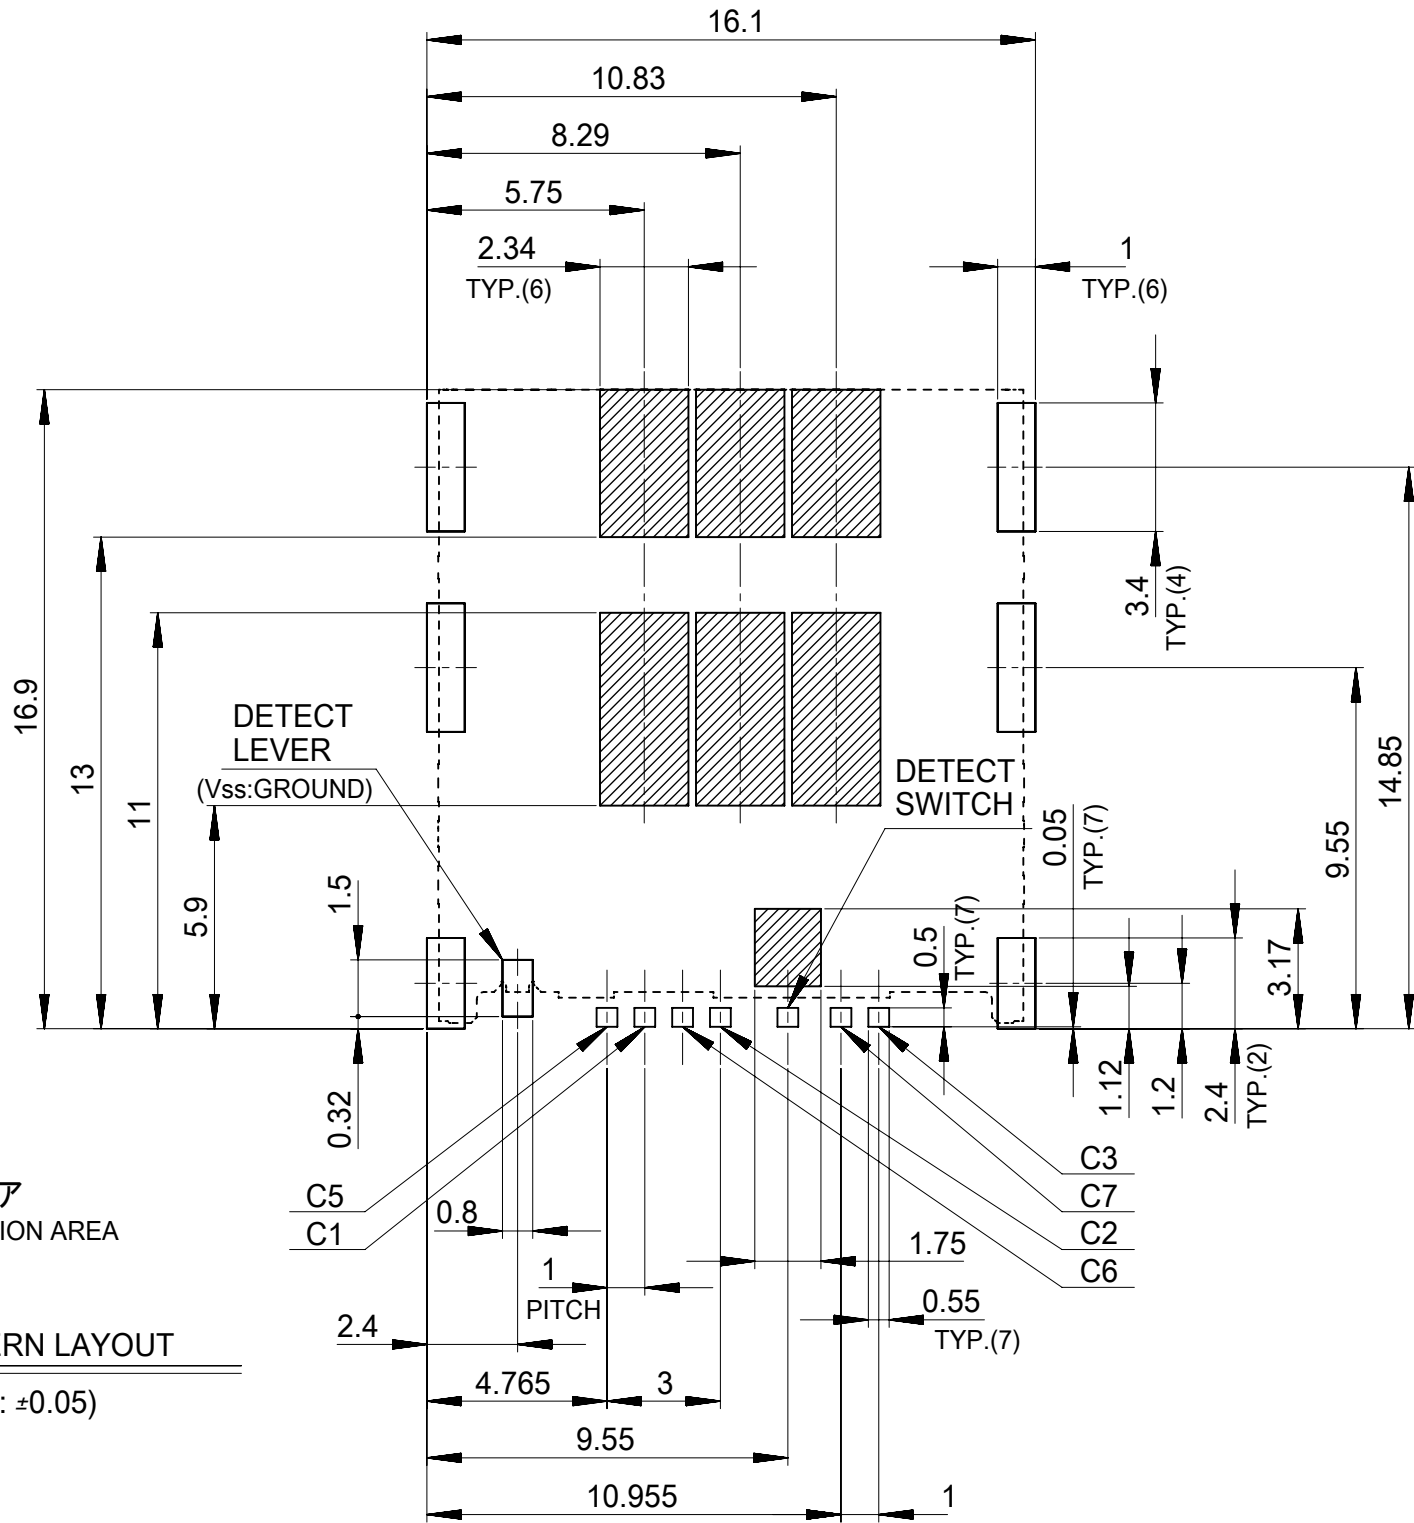

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION



REVISED	EC NO: 167374 DRWN: ESATO CHK'D: KTAKAHASHI APPR: KTAKAHASHI	2017/10/27	GENERAL TOLERANCES (UNLESS SPECIFIED)	DIMENSION UNITS		SCALE		molex®				
		2017/10/30		MM	5:1							
		2017/10/30		ANGULAR TOL ± 1.0 °	DRWN BY		DATE		MICRO SIM CARD CONN. PUSH/PUSH NORMAL TYPE ASS'Y			
				4 PLACES ±	Y MORINAGA		2013/11/21					
				3 PLACES ±	CHK'D BY		DATE					
				2 PLACES ±	TKUSUHARA01		2013/11/21					
		1 PLACE ±	APPR BY		DATE		PRODUCT CUSTOMER DRAWING					
		0 PLACES ±	NUKITA		2013/11/21							
		DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS	DRAWING SIZE	THIRD ANGLE PROJECTION			SERIES	MATERIAL NUMBER		CUSTOMER		
							503960			GENERAL MARKET		
C	REV			A3				DOCUMENT NUMBER		DOC TYPE	DOC PART	SHEET NUMBER
								SD-503960-007		PSD	001	2 OF 2

NOTES


CONFIDENTIAL

- 製品詳細寸法については、コネクタ単体のSD図面を参照下さい。
RE DETAILED DIMENSION, SEE RSD DRAWING OF ASS'Y.
- 梱包数量：1600 個／リール
NUMBER OF CONNECTORS：1600 PCS/REEL.
- リードテープ長さ LEAD TAPE LENGTH.


引き出し方向
PULL OUT DIRECTION

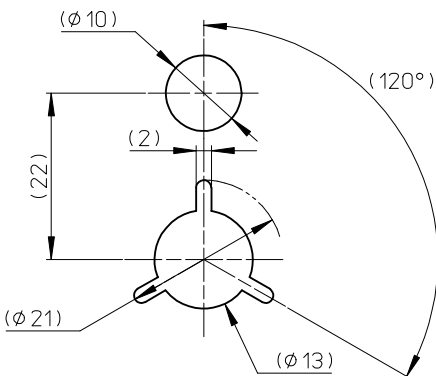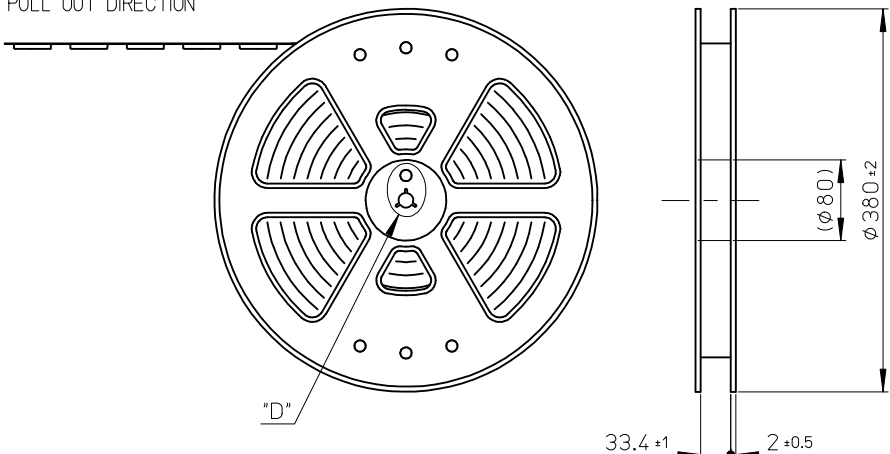

DETAIL "D"

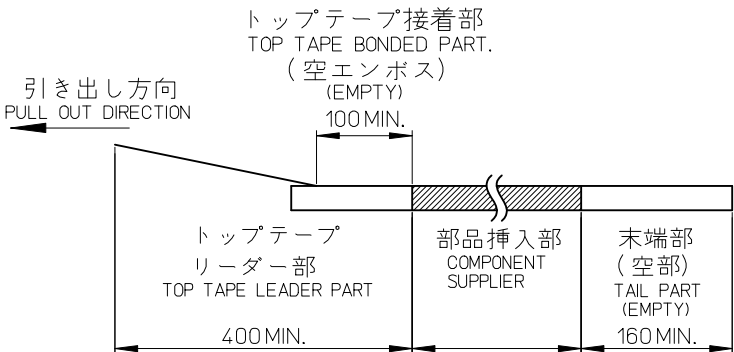

- トップテープの剥離強度：JIS C0806-3に準拠(剥離方向は下図参照)
尚、本規格値は出荷時に適用。(但し、輸送時に剥離が発生しないこと。)
PEELING OFF FORCE OF TOP TAPE：BASED UPON JIS C0806-3
(PEELING DIRECTION AS SHOWN IN FOLLOWING FIG.)
THIS REQUIREMENT SHOULD BE APPLIED AT SHIPMENT.
PEEL OFF SHOULD NOT BE ALLOWED, DURING TRANSPORTATION.

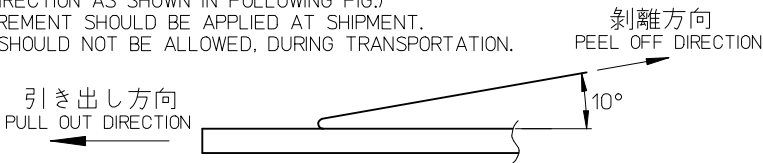


- 材料 MATERIAL
キャリアテープ (CARRIER TAPE)：ポリスチレン (POLYSTYRENE)
トップテープ (TOP TAPE)：PET, PE, PEF
リール (REEL)：ポリスチレン (PS) <リサイクル材含む>
POLYSTYRENE (PS)<RECYCLE MATERIAL CONTAINED>

503960-0695	6
EMBOSSED PACKAGE	極数
オーダー番号 ORDER NO.	CIRCUITS
CONNECTOR SERIES No. 503960-****	

RELEASED EC NO: J2014-0885 DRWN: Y MORINAGA 2013/11/20 CHKD: TKUSUHARA01 2013/11/20 APPR: NUKITA 2013/11/21 REV 0	DESCRIPTION	GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE		SCALE	DESIGN UNITS	THIRD ANGLE PROJECTION		
				MM ONLY		1:1	METRIC			
		10 UNDER	±0.2	DRAWN BY	DATE	TITLE MICRO SIM CARD CONN. PUSH/PUSH NORMAL TYPE EMBOSSED TAPE PACKAGE				
		10 OVER 30 UNDER	±0.25	Y MORINAGA	2013/11/20					
		30 OVER	±0.3	CHECKED BY	DATE	DOCUMENT NO. SD-503960-008				
		ANGULAR ±1 °	TKUSUHARA01	2013/11/20						
		DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		APPROVED BY	DATE	SHEET NO. 1 OF 2				
				NUKITA	2013/11/21					
				MATERIAL NO.						
				SEE CHART		SD-503960-008				
		THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION								

CONFIDENTIAL

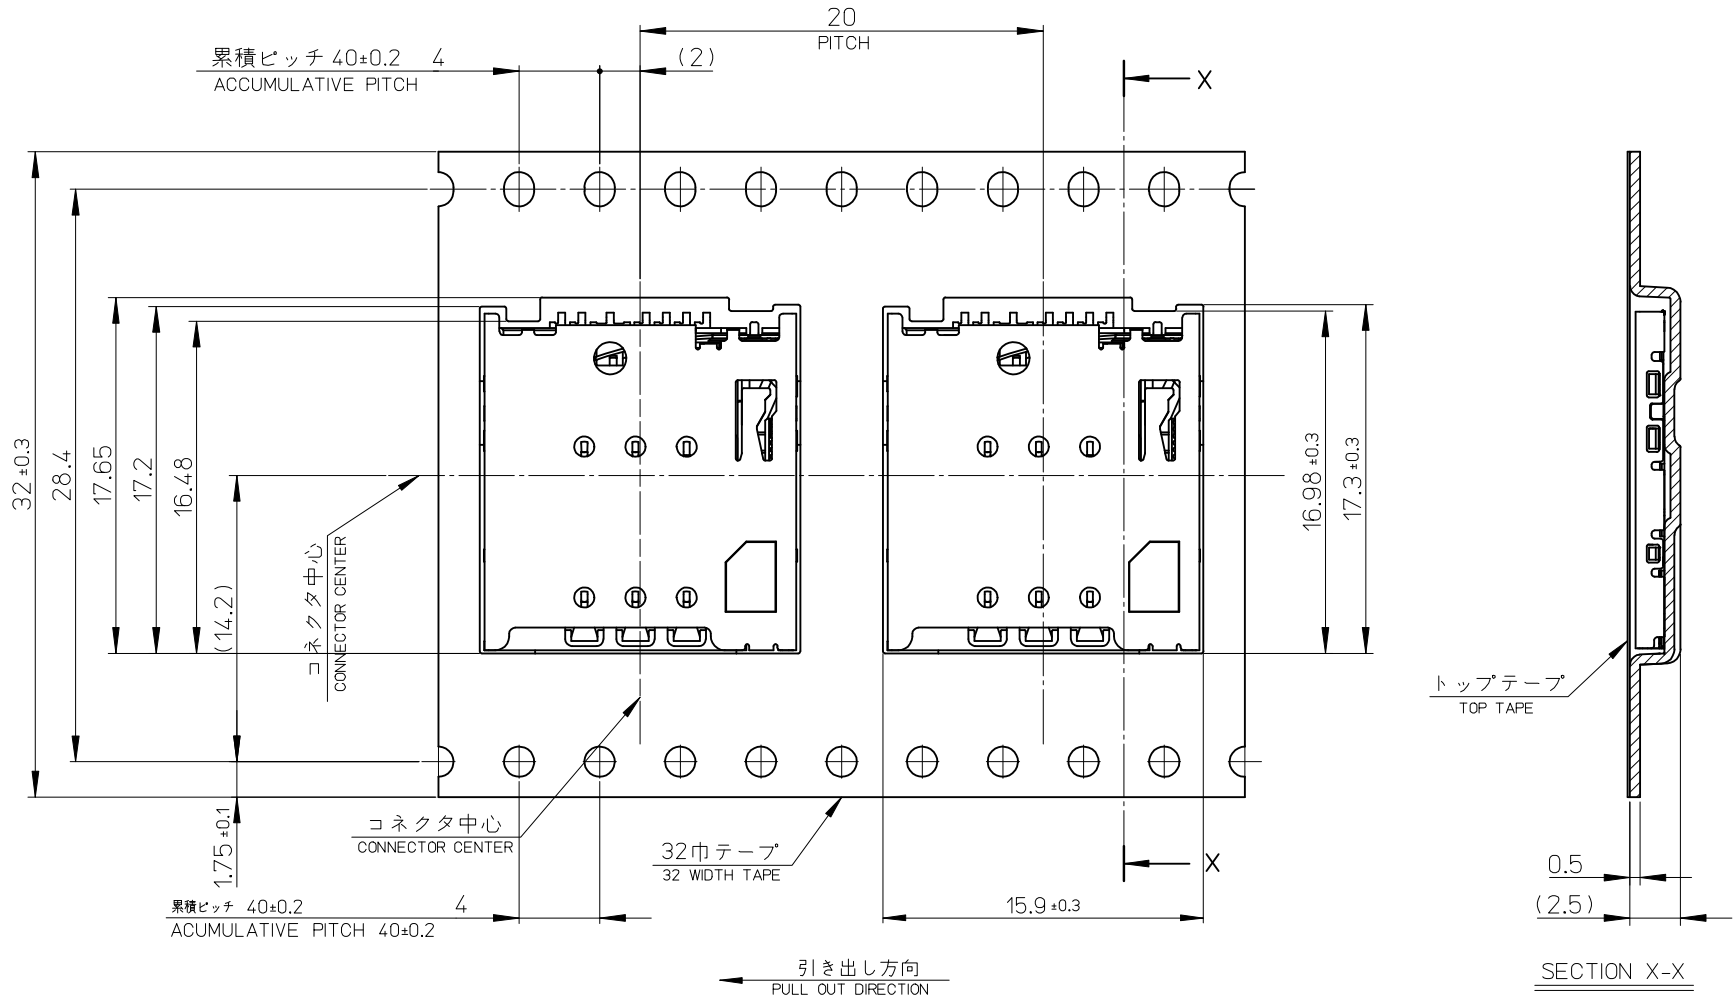

SEE SHEET 1 OF 2 EC NO: J2014-0885 DRWN: YMORINAGA 2013/11/20 CHKD: TKUSUHARA01 2013/11/20 APPR: NUKITA 2013/11/21 REV 0	DESCRIPTION	GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE MM ONLY		SCALE 1:1	DESIGN UNITS METRIC	 THIRD ANGLE PROJECTION		
				DRAWN BY YMORINAGA	DATE 2013/11/20	TITLE MICRO SIM CARD CONN. PUSH/PUSH NORMAL TYPE EMBOSSD TAPE PACKAGE molex				
		10 UNDER ±0.2		CHECKED BY TKUSUHARA01	DATE 2013/11/20					
		10 OVER 30 UNDER ±0.25		APPROVED BY NUKITA	DATE 2013/11/21					
		30 OVER ±0.3								
	REV	ANGULAR ±1 °		MATERIAL NO.		DOCUMENT NO.		SHEET NO.		
DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		SEE SHEET 1 OF 2		SD-503960-008		2 OF 2				
				SIZE A3	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION					