

ST Series Soldering Station



Features:

- Temperature locking.
- Beep alarm function available.
- MCU controlled temperature calibration.
- User-friendly menu enables system setting easier.
- Separate iron stand to save room and to make easier deposit.
- Buttons(1,2,3) for pre-setting or switching frequently used temperature.
- Low-voltage heater separated from power supply to keep soldering work safer.

Specification:


Product pictures			
Item No	ST-60	ST-80	ST-100
Voltage	AC(100V/110V/120V 220V/230V/240) 50/60Hz		
Power	60W	80W	100W
Temperature range	150°C~450°C	150°C~480°C	150°C~480°C
Temperature precision	±15°C	±10°C	±10°C
Temperature Stability	±2°C(in still air,no load)	±2°C(in still air,no load)	±2°C(in still air,no load)
The handle type	SP-60	SP-80	SP-100
Soldering tip type	T900-B	T900-B	T800-0.25I
Heat	High performance dual-core ceramic heater	High quality four-core wire heater	Sliver alloy heater
Package list	Main unit: 1unit Handle set : 1 PCS	Iron stand: 1 PCS AC cord: 1 PCS	Manual: 1 PCS Cleaning sponge: 1 PCS
Standard Packing	Inner box: 31.5x27x15.2(cm) N.W.: 2.09kg G.W.: 2.32kg Carton: 6PCS/Carton Size: 55.5x33x48(cm) N.W.: 14.4kg G.W.: 15.4kg	Inner box: 31.5x27x15.2(cm) N.W.: 2.58kg G.W.: 2.81kg Carton: 6PCS/Carton Size: 55.5x33x48(cm) N.W.: 16.9kg G.W.: 18.0kg	Inner box:31.5x27x15.2(cm) N.W.: 2.68kg G.W.: 2.95kg Carton: 6PCS/Carton Size: 55.5x33x48(cm) N.W.: 17.9kg G.W.: 19.0kg
Applicable	● Institutes ● Hobby	● Enterprises	● Education and practice ● Maintenance

Note: T800 series soldering tip details in page 16.
T900 series soldering tip details in page 24.


Soldering tips (T800)




T800-0.25I
ACF028944




T800-1.2C
ACF028948




T800-0.8D
ACF028952




T800-4.6D
ACF028955



T800-0.5I
ACF028945




T800-2.4C
ACF028949




T800-1.6D
ACF028953





T800-K
ACF028956





T800-1.0I
ACF028946




T800-3.2C
ACF028950



T800-3.2D
ACF028954




T800-4.6C
ACF028951




T800-1.4I
ACF028947



T800-2.4D
ACF029745




T800-SK
ACF029744




T800-0.25ILF
ACF028957




T800-2.4CLF
ACF028960




T800-1.2CLF
ACF028958




T800-2.4DLF
ACF028959




T800-2.0KLF
ACF028963



T800-1.6DLF
ACF028961




T800-3.2DLF
ACF028962




Soldering tips (T900)


T900-B
ACF028921




T900-LB
ACF028915




T900-SB
ACF028920




T900-I
ACF028919




T900-0.5C
ACF028916




T900-0.8C
ACF028917




T900-1C
ACF028918




T900-2C
ACF028924




T900-3C
ACF028925




T900-4C
ACF028926




T900-0.8D
ACF028910




T900-1.2D
ACF028911




T900-1.6D
ACF028912




T900-2.4D
ACF028913




T900-3.2D
ACF028914




T900-K
ACF028922




T900-1.6K
ACF030250




T900-SK
ACF029743

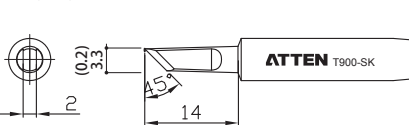


T900-2.0SK
ACF032155

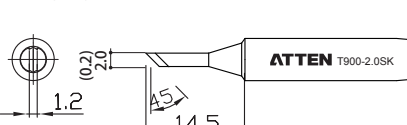


T900-0.2SI
ACF032154




T900-SI
ACF028923



T900-0.2IS
ACF031864

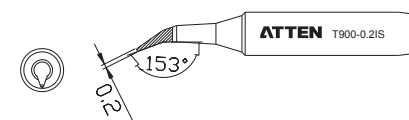

T900-0.5IS
ACF031254

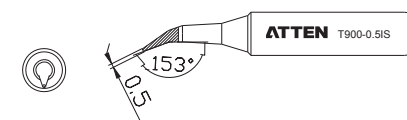

T900-IS
ACF029742

