


T-1 3/4 (5mm) ROUND LED LAMP

L-53

UNIT : MM(INCH)

TOLERANCE : $\pm 0.25(\pm 0.01)$

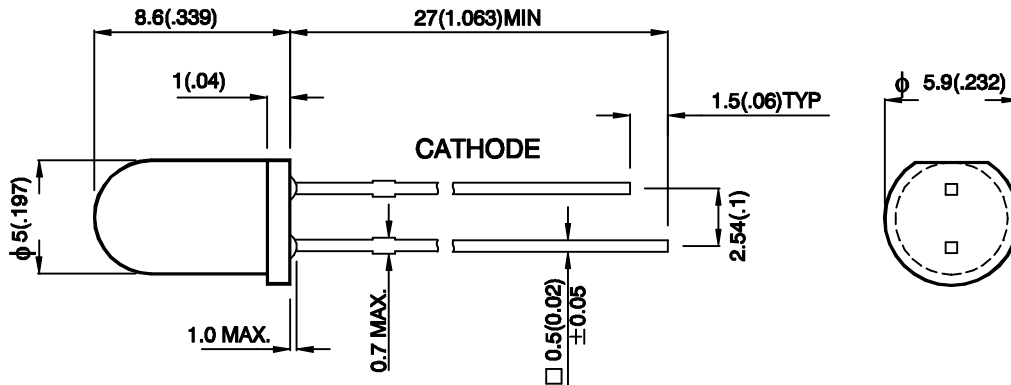

PART NO.	SOURCE (DICE)	LENS TYPE (RESIN)	LUMINOUS INTENSITY MCD @10mA * 20mA		VIEWING ANGLE 2 Θ 1/2
			MIN.	MAX.	
L-53HDLK	BRIGHT RED (GaP)	RED DIFFUSED	2	8	60°
L-53HCK		WATER CLEAR	5	20	30°
L-53HTK		RED TRANSPARENT	5	20	30°
L-53IDLK	RED HIGH EFFICIENCY (GaAsP/GaP)	RED DIFFUSED	12.5	80	60°
L-53ECK		WATER CLEAR	50	125	30°
L-53ITK		RED TRANSPARENT	50	125	30°
L-53YDLK	YELLOW (GaAsP/GaP)	YELLOW DIFFUSED	5	32	60°
L-53YCK		WATER CLEAR	20	70	30°
L-53YTK		YELLOW TRANSPARENT	20	70	30°
L-53GDLK	GREEN (GaP)	GREEN DIFFUSED	5	25	60°
L-53GCK		WATER CLEAR	20	100	30°
L-53GTK		GREEN TRANSPARENT	20	100	30°
L-53SRDLK	RED SUPER BRIGHT (GaAlAs)	RED DIFFUSED	* 80	300	60°
L-53SRCK		WATER CLEAR	* 200	1000	30°
L-53SRTK		RED TRANSPARENT	* 200	1000	30°
L-53EDLK	ORANGE (GaAsP/GaP)	ORANGE DIFFUSED	12.5	80	60°
L-53ETK		ORANGE TRANSPARENT	50	125	30°

APPROVED:

CHECKED:

DRAWN :

SCALE :

DATA NO. : E6377

3 : 1

DATE : MAR/01/1999