Order-No.	Shell Size / for No. of Contacts	A ±0.2	B ±0.1	C ±0.3	G ±0.3	K ±0.3	L ±0.3
FKS1A	1 / 9	10	25	32	46.1	18.5	19.5
FKS2A	2 / 15	16	33.3	40.3	54.4	26.8	27.8
FKS3A	3 / 25	29.7	47	54	68.1	40.5	41.5

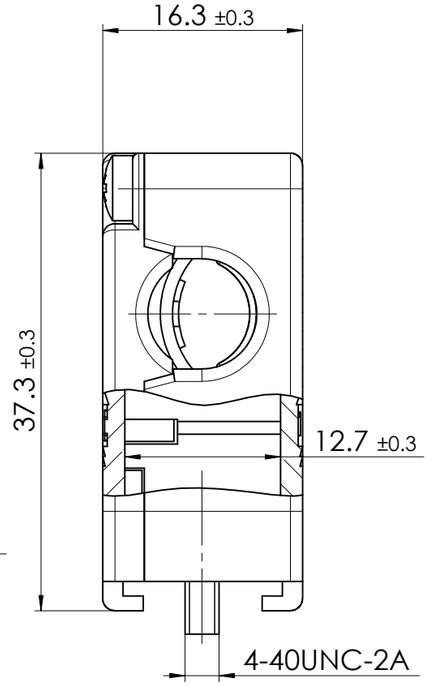

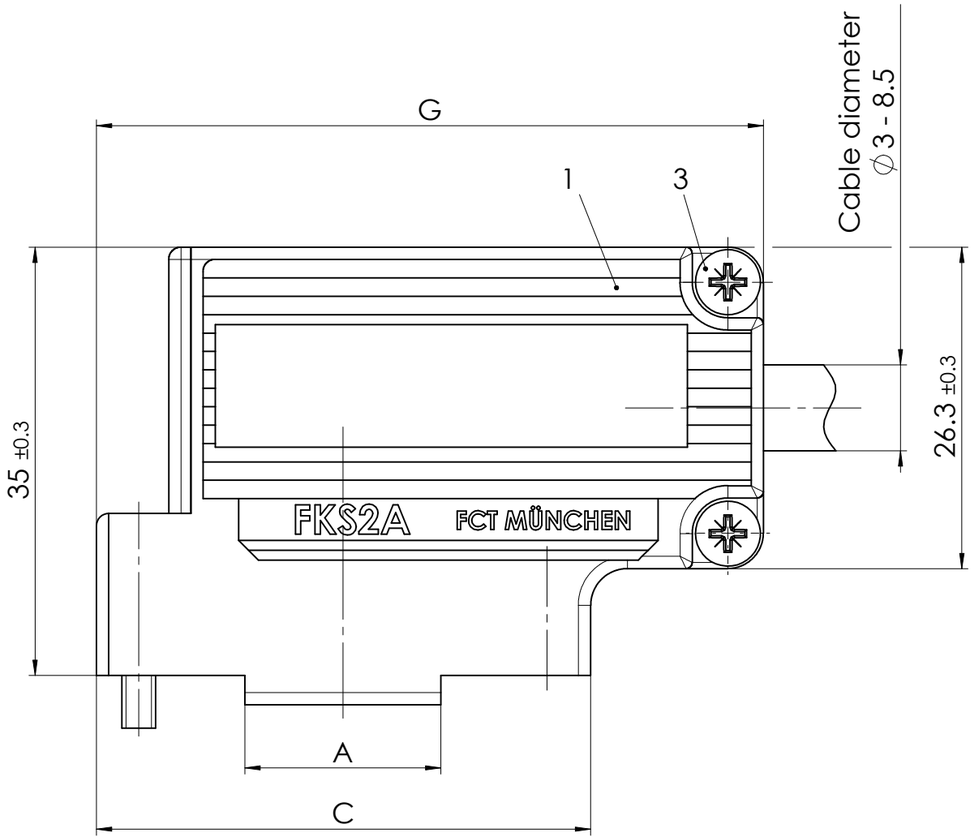

view of the hoods without lid

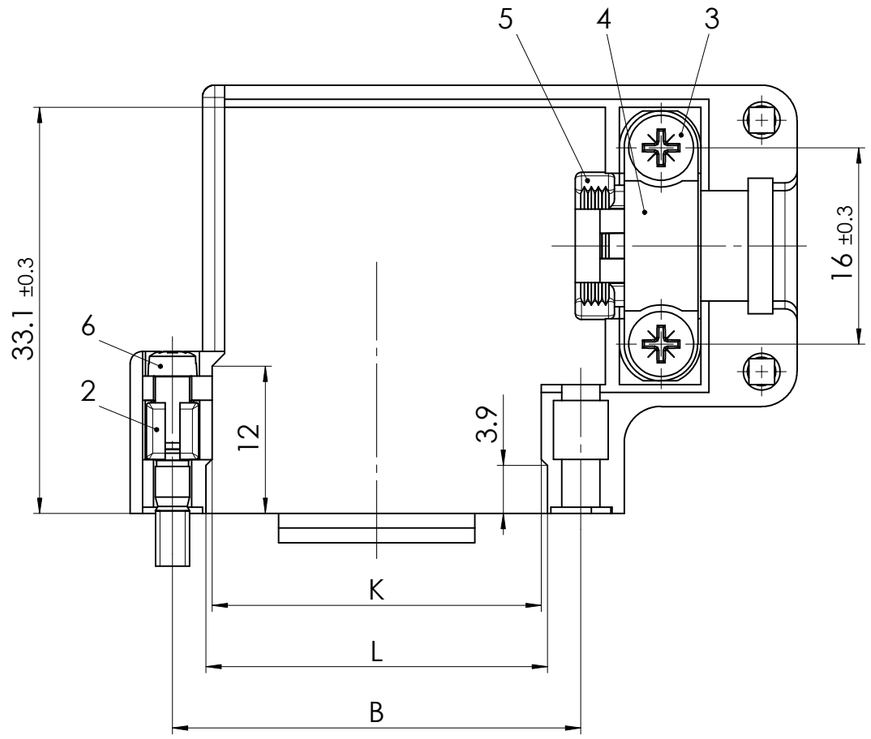

RoHS compliant

No.	St.	Part	Type Description/Material	Surface plating/Colour/Class
6	1	Locking screw	FVS1/5-K1163 4-40 / Steel	nickel plated
5	1	Strain relief	ABS	nickel plated
4	1	Cable clamp	Steel	tin plated
3	4	Screw	Case hardened steel	zinc plated
2	1	Block insert	PC+ABS	black
1	1	Hood	FKS1-3A / PC+ABS	nickel plated



reverse side
1 : 1

max. torque are 40 Ncm
② Part-No. 3 to 5 not mounted

REV.	DATE	CH.-NO.
2	09-02-2010	22060
1		

Measurement without tolerance acc. to ISO 2768-m
SCALE 2:1

	NAME / DATE
DRAWN	Michael.Holze 16-12-2008
CHECKED	Anke.Meyer-Richter 10-02-2010

FCT a molex company

ORIGINAL: DIN A3-DRAWING AS A FILE

TITLE: Plastic Hood

DWG.NO.: FKS1-3A

REV.: 2

REPLACEMENT FOR: FKS1-3Aq_ACAD

PAGES 1

COMMENT:
ALL RIGHTS ARE RESERVED BY US FOR THIS DRAWING. WITHOUT OUR PRIOR CONSENT, IT MAY NEITHER BE DUBLICATED NOR MADE AVAILABLE TO A THIRD PARTY, AND IT ALSO MAY NOT BE IMPROPERLY USED BY TE RECEIVER, OR A THIRD PARTY.