
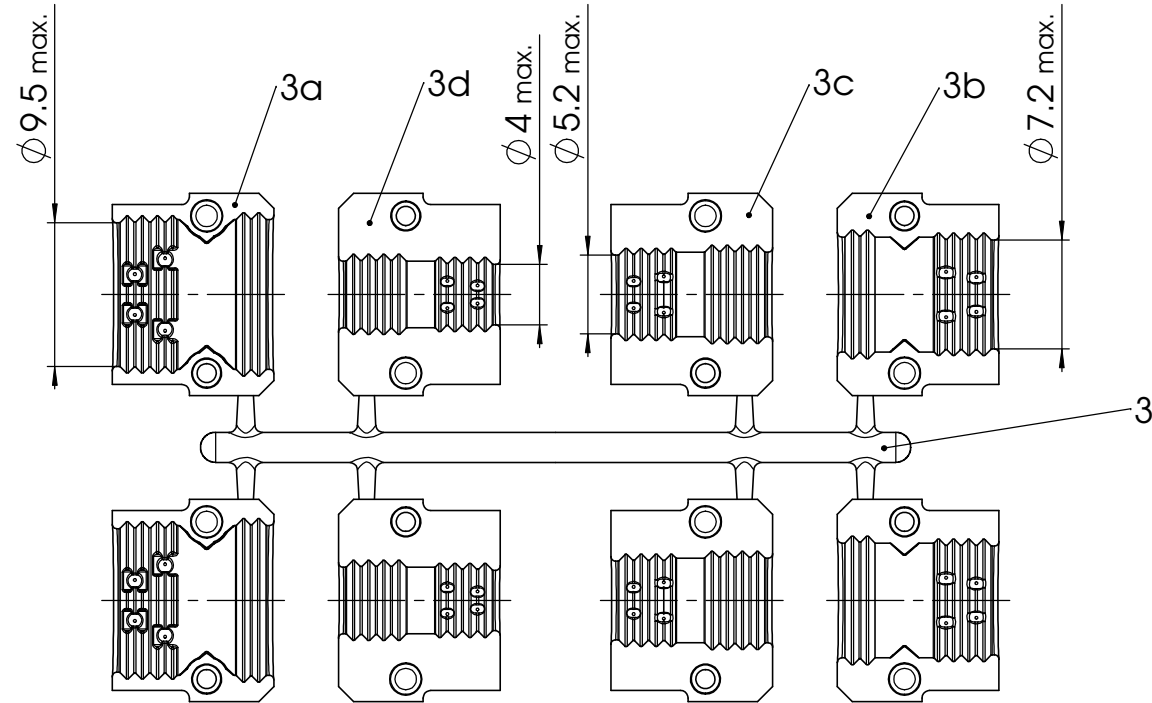


Order No.	Shell Size / for No. of Contacts	A ±0.3	B ±0.1	C ±0.3	E ±0.3	øF1	øF2 min - max	G ±0.3	J ±0.3	L ±0.3
FMBR1	1/9	13.8	25	31.2	14.5	12	3.5 - 9.5	37.7	12.1	19.4
FMBR2	2/15	22	33.3	39.5	14.5	12	3.5 - 9.5	46	12.1	27.9
FMBR3	3/25	28	47	53.2	14.5	12	3.5 - 9.5	60.2	12.1	41.4
FMBR4	4/37	45	63.5	70	14.5	12	3.5 - 9.5	76.5	12.1	57.8
FMBR5	5/50	42	61.1	67.8	17.5	12	3.5 - 9.5	74	15.1	55.5

øF1 = Cable diameter without strain relief
 øF2 = Cable diameter with strain relief

view of the hoods without lid

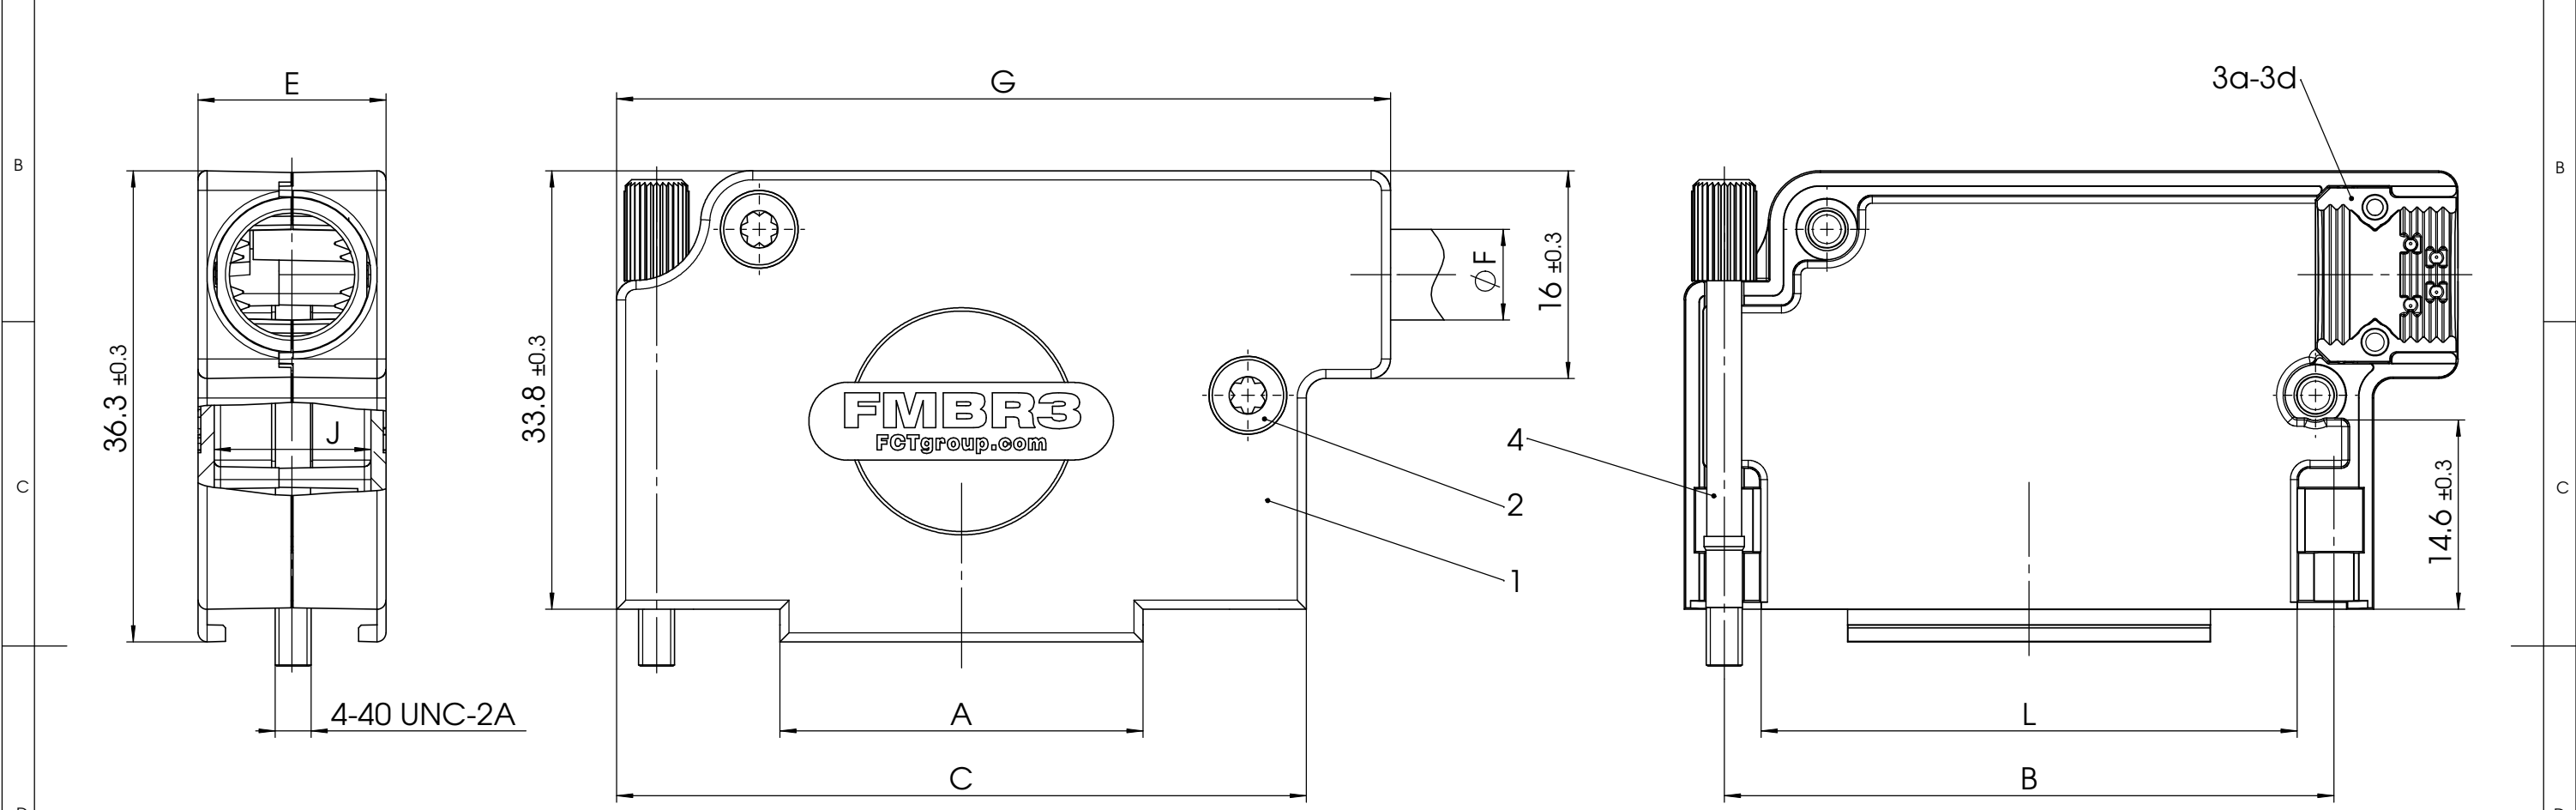

max. torque are 40 Ncm
 Part-No. 3 and 4 not mounted

No.	St.	Part	Type	Description/Material	Surface plating/Colour/Class
4	1	Knurled thumb screw	FRSMB1/5-K1618 4-40 / Brass	nickel plated	
3d	2	Strain relief ø4mm	Polyester	black	
3c	2	Strain relief ø5.2mm	Polyester	black	
3b	2	Strain relief ø7.2mm	Polyester	black	
3a	2	Strain relief ø9.5mm	Polyester	black	
3	1	Strain relief module	FZM-3266 / Polyester	black	
2	2	Screw	Torx T10 / Case hardened steel	zinc plated	
1	1	Hood	FMBR1-5 / Zinc die-cast	nickel plated	

COMMENT:
 ALL RIGHTS ARE RESERVED BY US FOR THIS DRAWING. WITHOUT OUR PRIOR CONSENT,
 IT MAY NEITHER BE DUBICATED NOR MADE AVAILABLE TO A THIRD PARTY.
 AND IT ALSO MAY NOT BE IMPROPERLY USED BY THE RECEIVER, OR A THIRD PARTY.

	SCALE	TITLE
	2:1	Metal hood
DRAWN Anke Meyer-Richter 16-05-2008		DWG.NO.
CHECKED katja.schöber 12-10-2010		FMBR1-5
1	REV.	1
DATE	CH.-NO.	PAGES 1
ORIGINAL: DIN A3-DRAWING AS A FILE	REPLACEMENT FOR:	FMBR1-2_SW