



3.5X2.8mm Surface Mount LED

KA-3528 LOW CURRENT

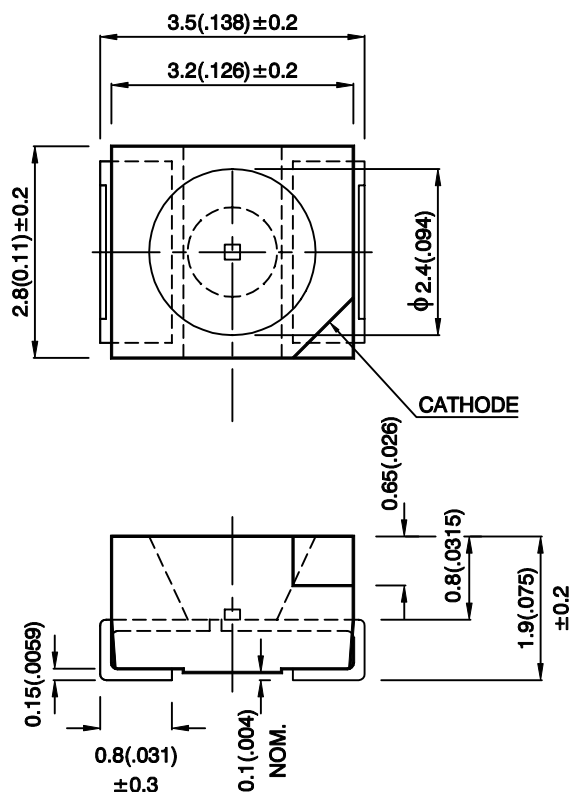

UNIT : MM(INCH)

TOLERANCE : $\pm 0.25(\pm 0.01)$

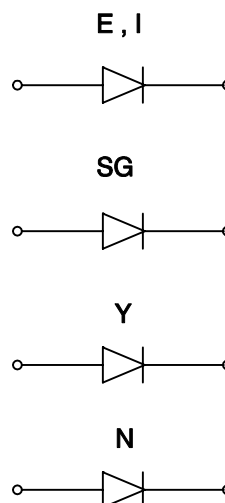

SELECTION GUIDE

PART NO.	SOURCE (DICE)	LENS TYPE (RESIN)	LUMINOUS INTENSITY MCD @2mA		VIEWING ANGLE 2 θ 1/2
			MIN.	MAX.	
KA-3528LSGT	GREEN SUPER BRIGHT (GaP)	GREEN TRANS.	0.8	2	120°
KA-3528LSGC		WATER CLEAR	0.8	2	120°
KA-3528LYC	YELLOW (GaAsP/GaP)	WATER CLEAR	0.5	0.8	120°
KA-3528LYT		YELLOW TRANS.	0.5	0.8	
KA-3528LIT	RED HIGH EFFICIENCY (GaAsP/GaP)	RED TRANSPARENT	0.8	2	120°
KA-3528LEC		WATER CLEAR	0.8	2	
KA-3528LNC	PURE ORANGE (GaAsP/GaP)	WATER CLEAR	0.8	2	120°

APPROVED:
J. Chuang

CHECKED:
A. Chen

DRAWN :
L.N. Sheu

SCALE :
10 : 1

DATA NO. : E4822
DATE : NOV/07/98