


KM-23-F

SOT 23 SURFACE MOUNT LED LAMP

UNIT : MM(INCH)

TOLERANCE : $\pm 0.25(\pm 0.01)$

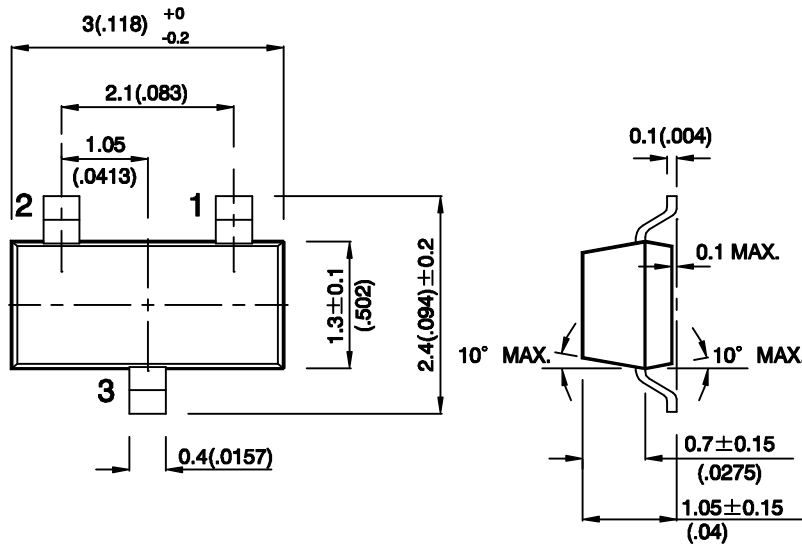

1 ANODE

2 N.C.

3 CATHODE

PART NO.	SOURCE (DICE)	LENS TYPE (RESIN)	LUMINOUS INTENSITY MCD @20mA		VIEWING ANGLE 2 Θ 1/2
			MIN.	MAX.	
KM-23YD-F	YELLOW (GaAsP/GaP)	YELLOW DIFFUSED	5	12.5	140°
KM-23YT-F		YELLOW TRANSPARENT	5	12.5	
KM-23YC-F		WATER CLEAR	5	12.5	
KM-23YW-F		WHITE DIFFUSED	5	12.5	
KM-23HD-F	BRGHT RED (GaP)	RED DIFFUSED	0.5	1.25	140°
KM-23HT-F		RED TRANSPARENT	0.5	1.25	
KM-23HC-F		WATER CLEAR	0.5	1.25	
KM-23ID-F	RED HIGH EFFICIENCY (GaAsP/GaP)	RED DIFFUSED	8	32	140°
KM-23IT-F		RED TRANSPARENT	8	32	
KM-23EC-F		WATER CLEAR	8	32	
KM-23SGD-F	GREEN SUPER BRIGHT (GaP)	GREEN DIFFUSED	8	32	140°
KM-23SGT-F		GREEN TRANSPARENT	8	32	
KM-23SGC-F		WATER CLEAR	8	32	

APPROVED:

CHECKED:

DRAWN :

SCALE :

DATA NO. : E3313

3 : 1

DATE : SEP/02/98