


SUBMINIATURE SOLID STATE LAMPS

(Z-BEND)

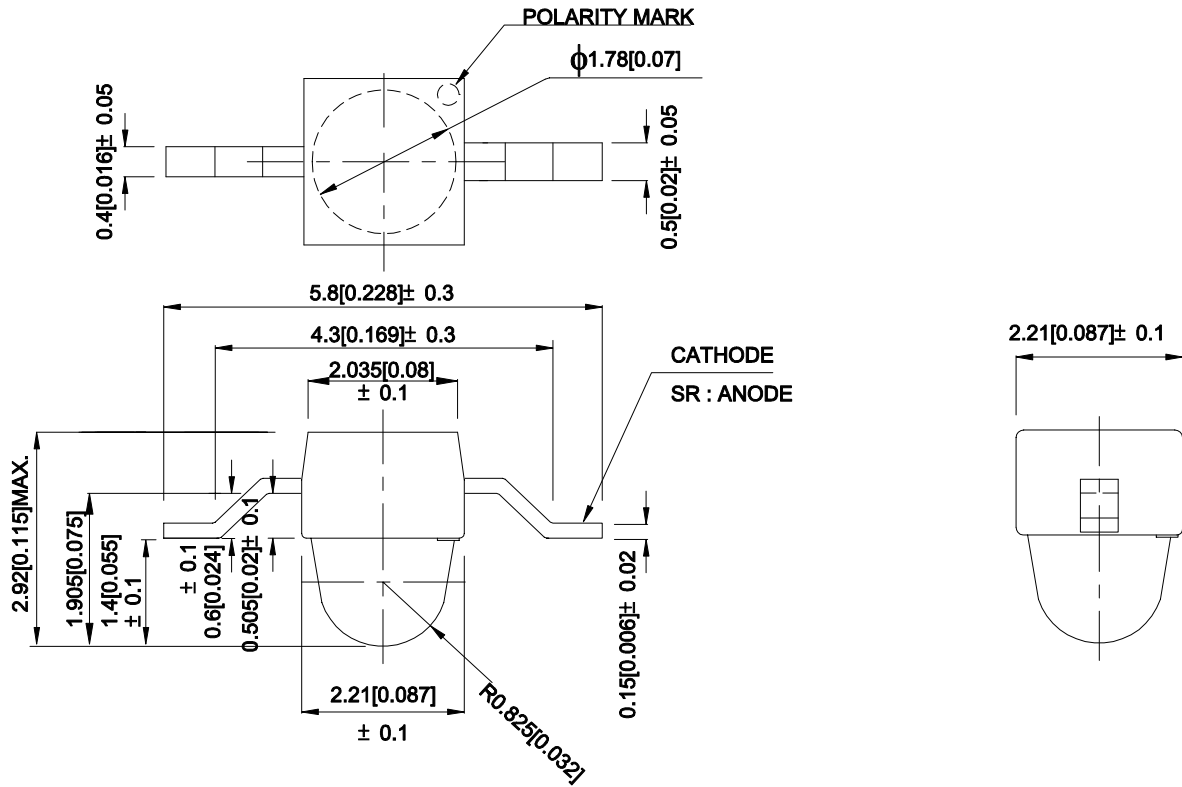

UNIT : MM(INCH)

TOLERANCE : ± 0.25[± 0.01] UNLESS OTHERWISE NOTED

Selection Guide

Part No.	Dice	Lens Type	Iv (mcd) @20mA		Viewing Angle
			Min.	Typ.	2θ 1/2
KM-27ID-09	HIGH EFFICIENCY RED (GaAsP/GaP)	RED DIFFUSED	8	30	40°
KM-27EC-09	HIGH EFFICIENCY RED (GaAsP/GaP)	WATER CLEAR	20	70	20°
KM-27SGD-09	SUPER BRIGHT GREEN (GaP)	GREEN DIFFUSED	3	10	40°
KM-27SGC-09	SUPER BRIGHT GREEN (GaP)	WATER CLEAR	40	100	20°
KM-27YD-09	YELLOW (GaAsP/GaP)	YELLOW DIFFUSED	3	10	40°
KM-27YC-09	YELLOW (GaAsP/GaP)	WATER CLEAR	20	40	20°
KM-27SECK-09	HYPER ORANGE (InGaAlP)	WATER CLEAR	400	1000	20°
KM-27SURCK-09	HYPER RED (InGaAlP)	WATER CLEAR	200	700	20°
KM-27SYCK-09	HYPER YELLOW (InGaAlP)	WATER CLEAR	200	500	20°
KM-27SYC-09	SUPER BRIGHT YELLOW (InGaAlP)	WATER CLEAR	20	40	20°
KM-27SEC-09	SUPER BRIGHT ORANGE (InGaAlP)	WATER CLEAR	500	1300	20°
KM-27SURC-09	HYPER RED (InGaAlP)	WATER CLEAR	300	800	20°
KM-27SRC-09	SUPER BRIGHT RED (GaAlAs)	WATER CLEAR	200	700	20°
KM-27SRD-09	SUPER BRIGHT RED (GaAlAs)	RED DIFFUSED	50	150	40°

APPROVED:

J.Lu

CHECKED:

A.Ting

DRAWN :

L.N. Sheu

SCALE :

10 : 1

DATA NO. : F3034

V.1

DATE : JAN/15/2000