
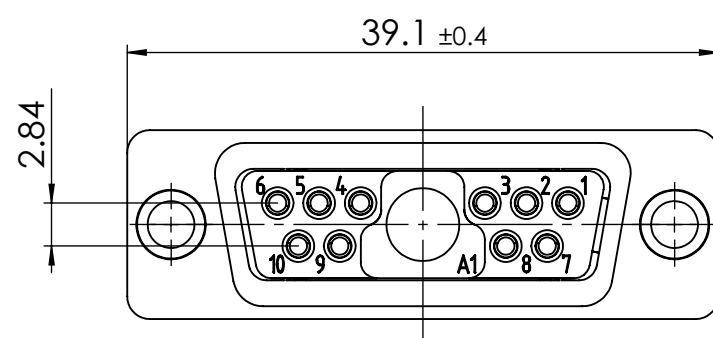
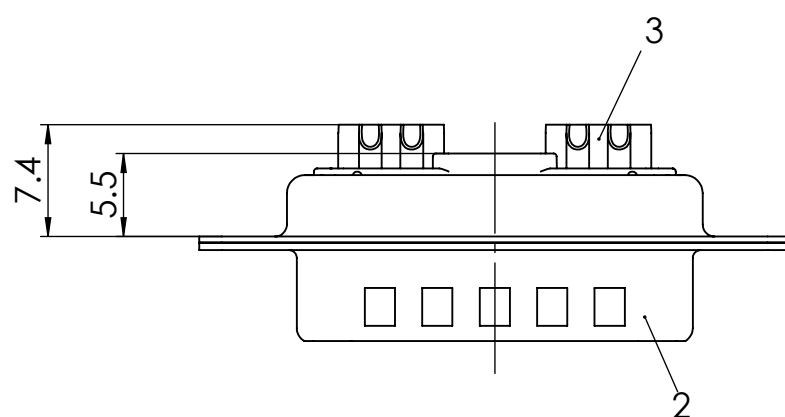
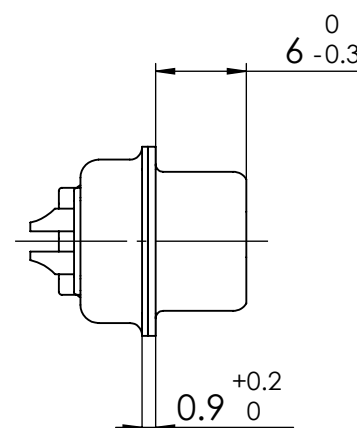


RoHS compliant by exemption

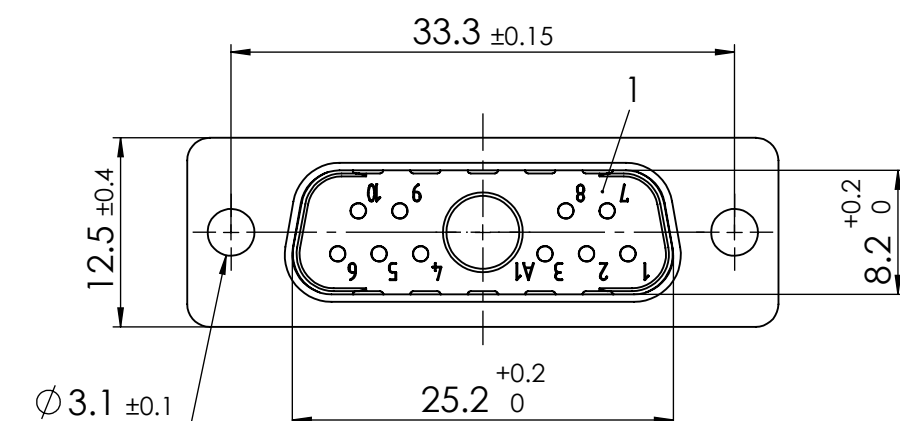

3	10	Signal contact	P0 / Brass	0.8µm Au / AWG 20
2	1	Shell	Steel	tin plated
1	1	Insulator	PBT (-55°C to +130°C) acc. UL94V-0	green
<i>No.</i>	<i>St.</i>	<i>Part</i>	<i>Type Description/Material</i>	<i>Surface plating/Colour/Class</i>

FUNCTIONAL SYMBOLS	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION									
	DIMENSION UNITS mm		SCALE 2:1		MEASUREMENTS CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION TOLERANCE ACC. TO ISO 2768-m			molex		
			CURRENT REVISION							
			DRWN: DRAWN BY msteinbrueck 03-08-2023			FCT D-Sub Mixed-Layout Connector				
		APPR: APPR BY mteubel 08-08-2023								
	3 24410		INITIAL REVISION			PRODUCT CUSTOMER DRAWING				
	2 24130									
	1		DRWN: DRAWN BY Denzinger 19-03-2003			MATERIAL NUMBER 1731070102		REVISION 3		
	REV. CH.-NO.		APPR: APPR BY Floßmann 19-03-2003							
	REPLACEMENT FOR: 1731070102_Rev. A		FRIST ANGLE PROJECTION 		DRAWING A3-SIZE		DOCUMENT NUMBER FM11W1P-K120		CUSTOMER GENERAL MARKET	SHEET NUMBER 1 OF 1

COMMENT:
ALL RIGHTS ARE RESERVED BY US FOR THIS DRAWING. WITHOUT OUR PRIOR CONSENT, IT MAY NEITHER BE DUPLICATED NOR MADE AVAILABLE TO A THIRD PARTY, AND IT ALSO MAY NOT BE IMPROPERLY USED BY THE RECEIVER, OR A THIRD PARTY.