


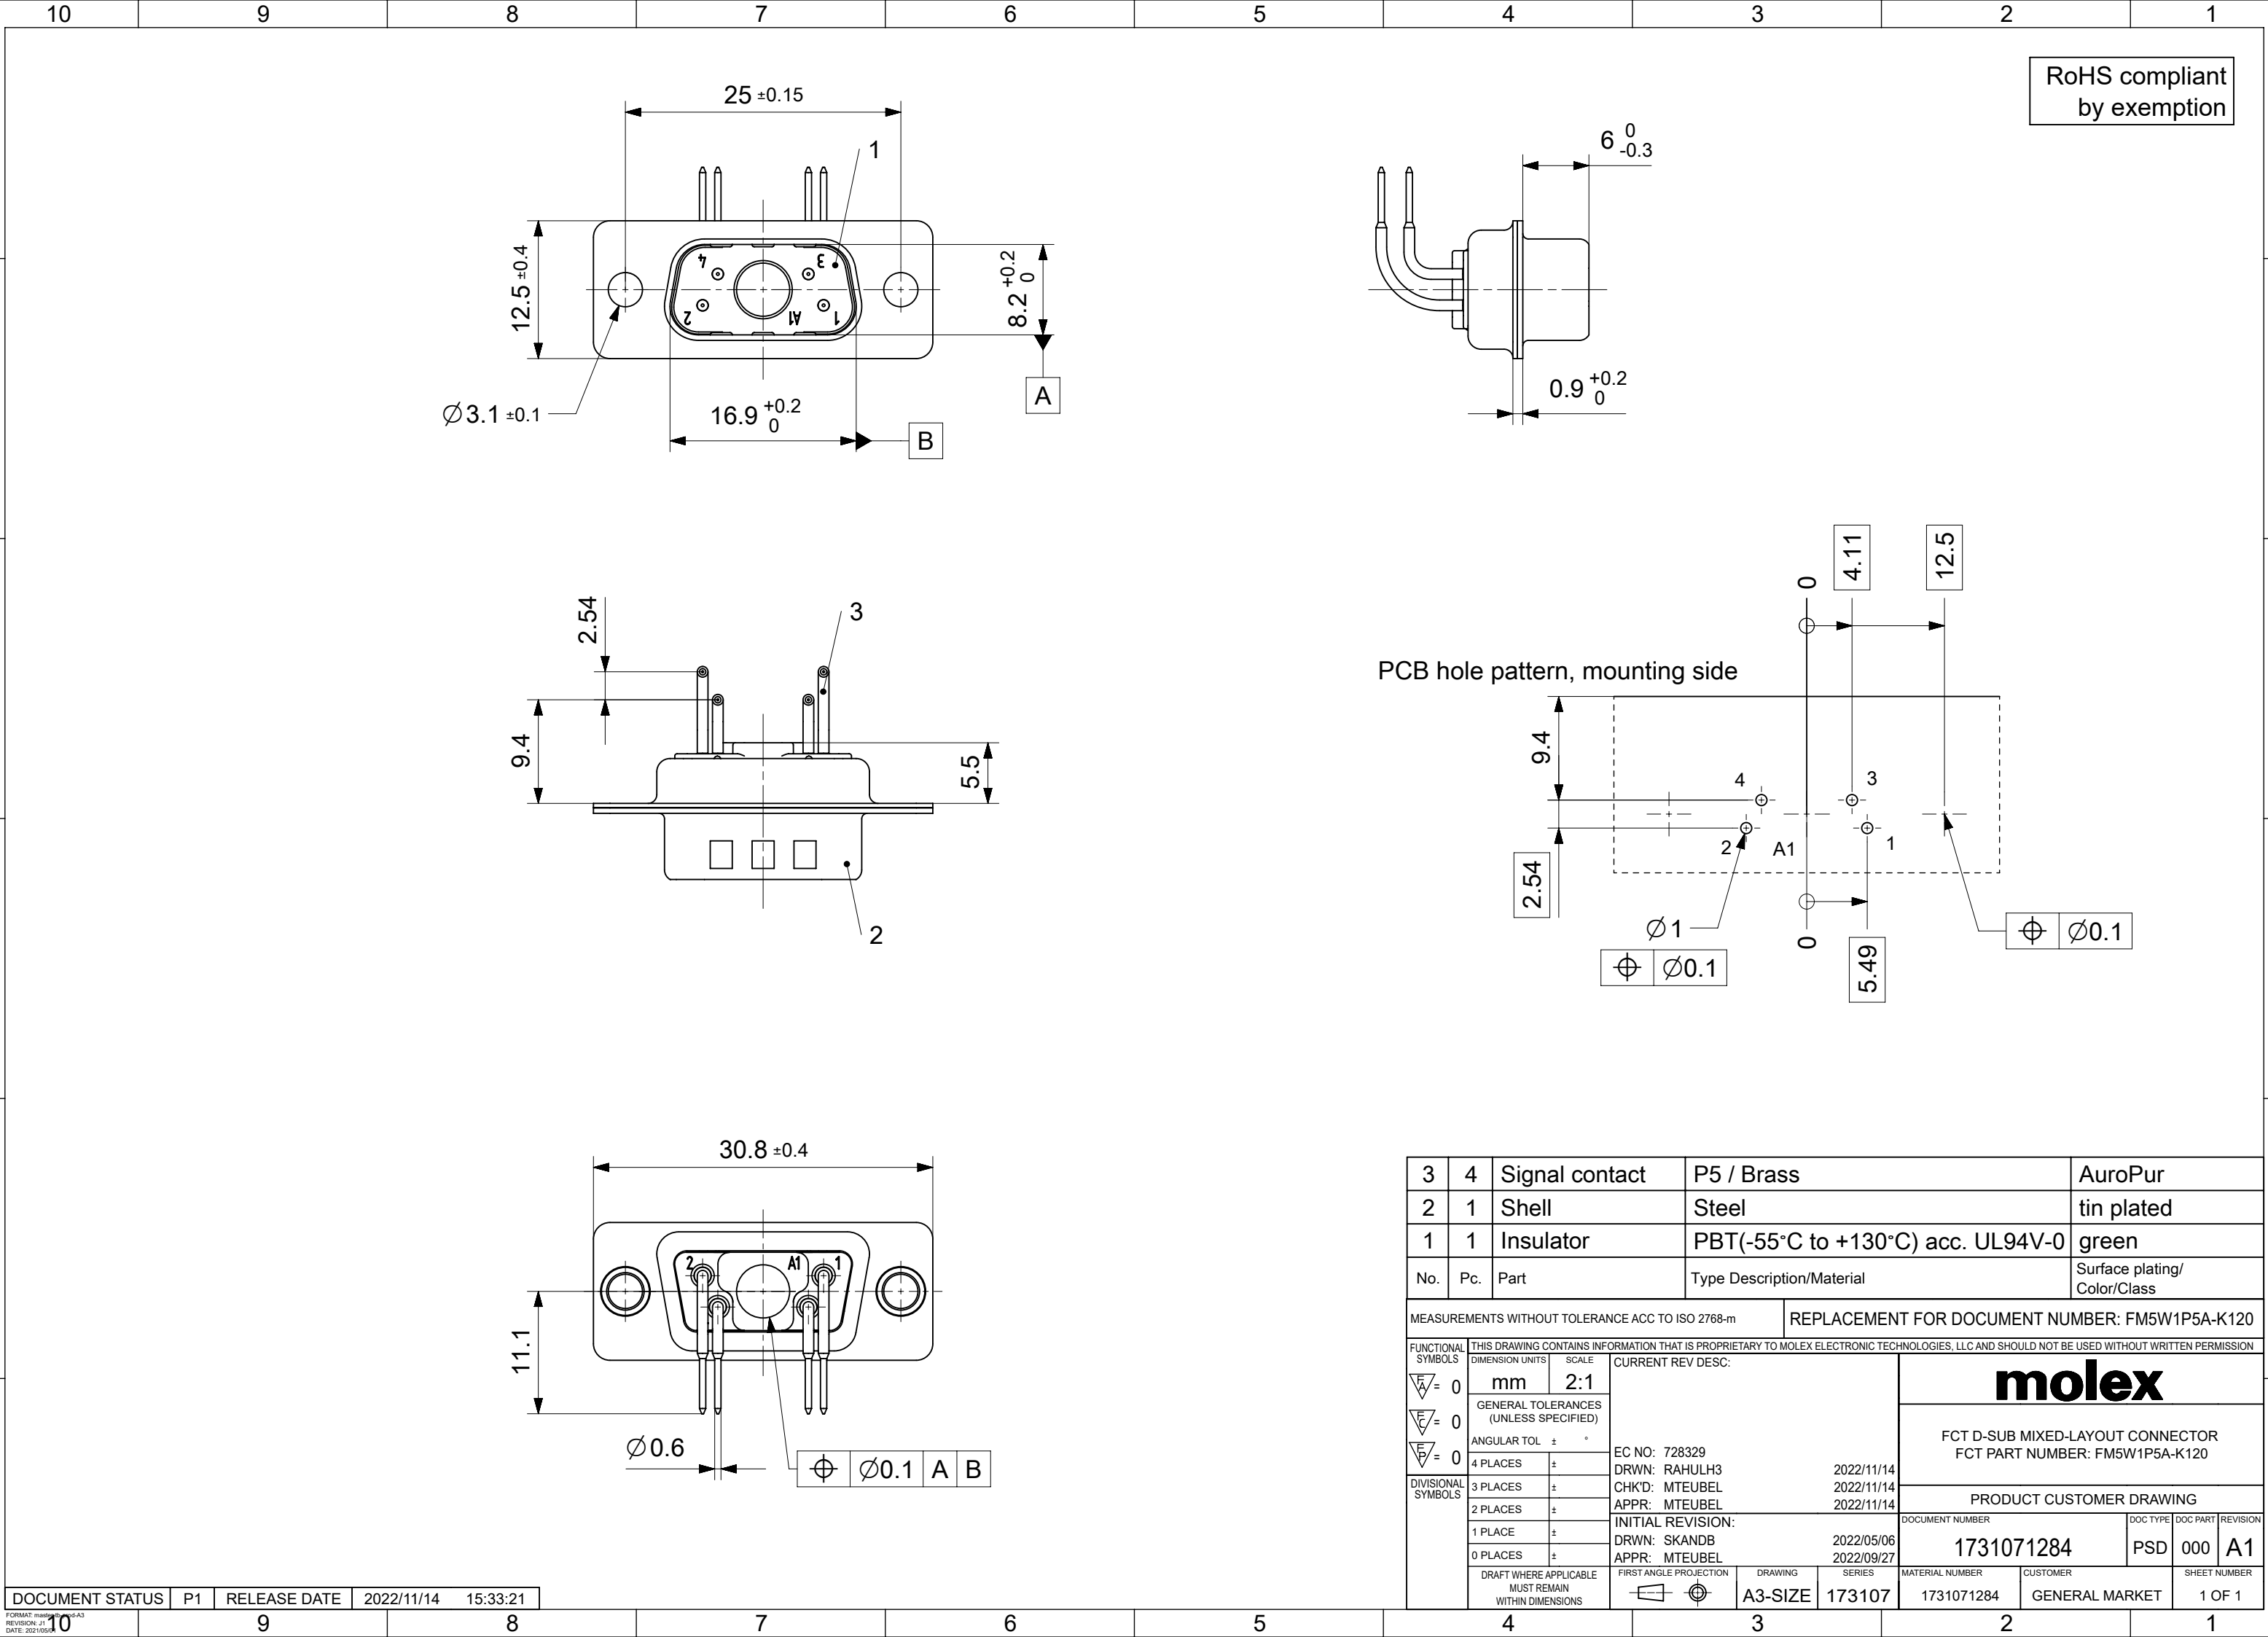

3	4	Signal contact	P5 / Brass	AuroPur
2	1	Shell	Steel	tin plated
1	1	Insulator	PBT(-55°C to +130°C) acc. UL94V-0	green
No.	Pc.	Part	Type Description/Material	Surface plating/ Color/Class

MEASUREMENTS WITHOUT TOLERANCE ACC TO ISO 2768-m				REPLACEMENT FOR DOCUMENT NUMBER: FM5W1P5A-K120					
FUNCTIONAL SYMBOLS	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION		molex						
	CURRENT REV DESC:								
	FA = 0	mm	SCALE 2:1	EC NO: 728329		FCT D-SUB MIXED-LAYOUT CONNECTOR FCT PART NUMBER: FM5W1P5A-K120			
	FE = 0	GENERAL TOLERANCES (UNLESS SPECIFIED)		DRWN: RAHULH3 2022/11/14					
FA = 0	ANGULAR TOL ± °		CHK'D: MTEUBEL 2022/11/14		PRODUCT CUSTOMER DRAWING				
4 PLACES ±		APPR: MTEUBEL 2022/11/14							
DIVISIONAL SYMBOLS	3 PLACES ±		INITIAL REVISION:		DOCUMENT NUMBER		DOC TYPE	DOC PART	REVISION
	2 PLACES ±		DRWN: SKANDB 2022/05/06		1731071284		PSD	000	A1
	1 PLACE ±		APPR: MTEUBEL 2022/09/27						
	0 PLACES ±								
DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		FIRST ANGLE PROJECTION		DRAWING	SERIES	MATERIAL NUMBER	CUSTOMER		SHEET NUMBER
				A3-SIZE	173107	1731071284	GENERAL MARKET		1 OF 1

DOCUMENT STATUS	P1	RELEASE DATE	2022/11/14	15:33:21
-----------------	----	--------------	------------	----------