

B
2.00 to 2.50mm (.079 to .098") Pitch

FEATURES AND SPECIFICATIONS

Features and Benefits

- Spring beam design provides high pressure and small deflection for high vibration applications
- Locking tang for secure housing retention

Reference Information

Packaging: Reel or bag
Use With: [51005](#)
Mates With: [50012](#)
Designed In: Millimeters

Electrical

Voltage: 125V
Current:

AWG	24	26	28
Amperes	2.0	1.5	1.0

Contact Resistance: 20mΩ max.
Dielectric Withstanding Voltage: 500V AC/1 min.
Insulation Resistance: 1000 MΩ min.


Physical

Contact: Phosphor Bronze
Plating: Tin
Wire Range: 24 to 28 AWG
Insulation Diameter: 1.15mm dia. max.
Strip Length: 1.70 to 2.30mm




2.00mm (.079") Pitch
Wire-to-Wire
Crimp Terminal

50013
Female

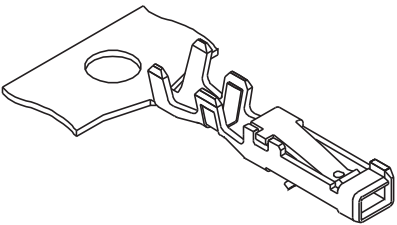

CATALOG DRAWING (FOR REFERENCE ONLY)

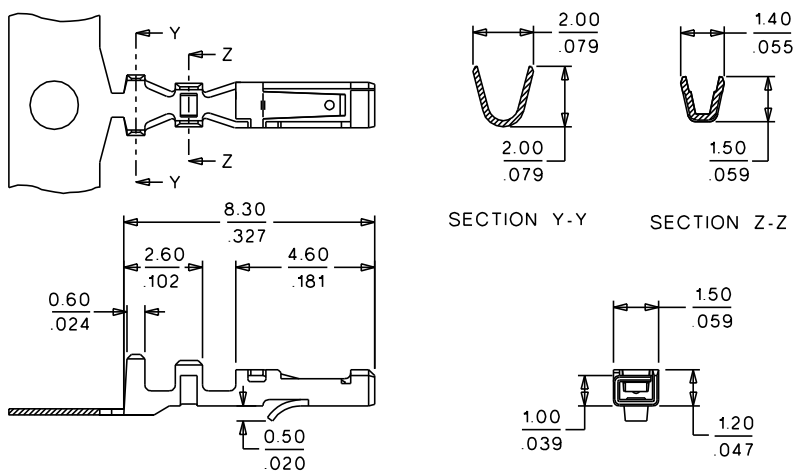

ORDERING INFORMATION

Order No.	Terminal
50013-8000	Reel
50013-8100	Bag