

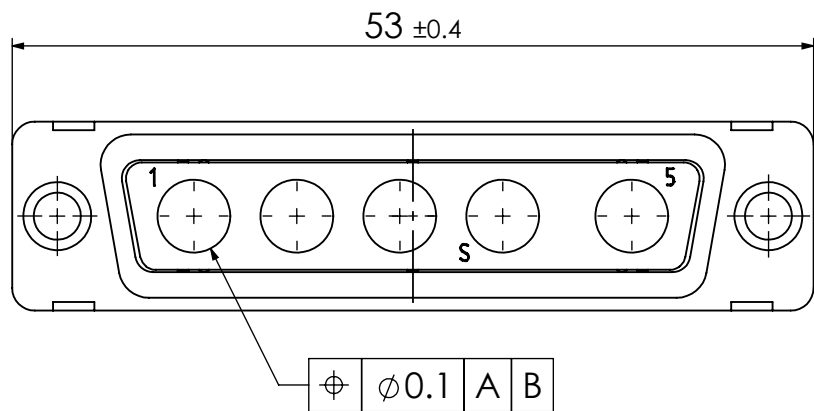
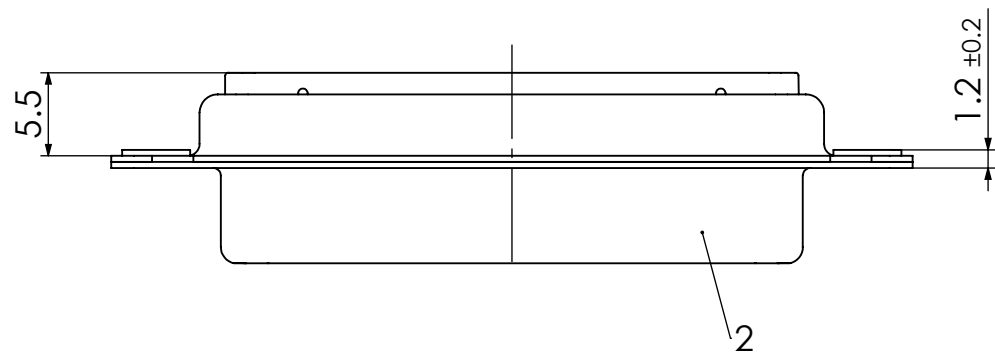



COMMENT:
ALL RIGHTS ARE RESERVED BY US FOR THIS DRAWING. WITHOUT OUR PRIOR CONSENT,
IT MAY NEITHER BE DUBICATED NOR MADE AVAILABLE TO A THIRD PARTY.
AND IT ALSO MAY NOT BE IMPROPERLY USED BY TE RECEIVER, OR A THIRD PARTY.

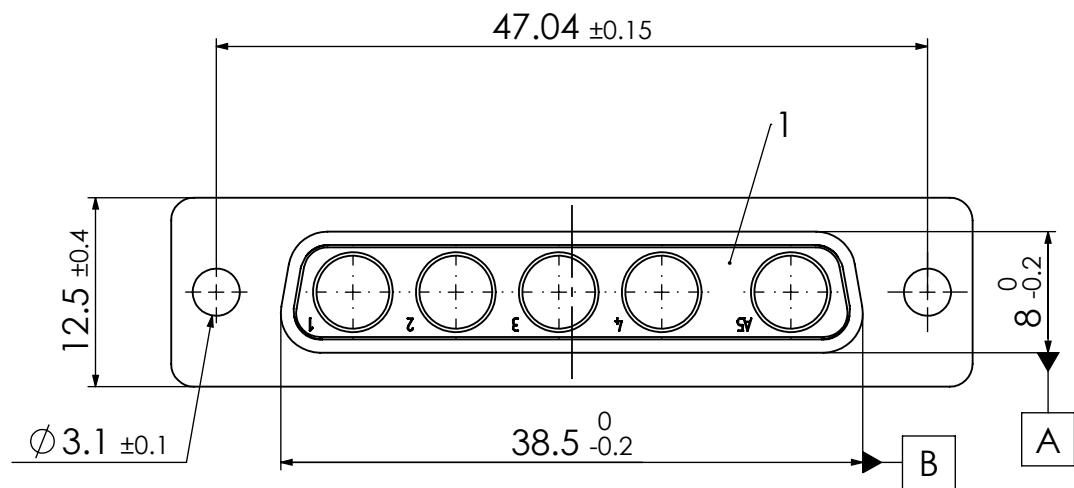

RoHS compliant

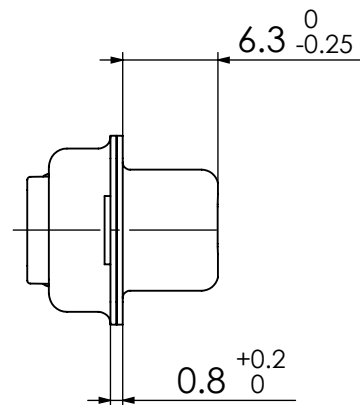

PCB hole pattern, mounting side

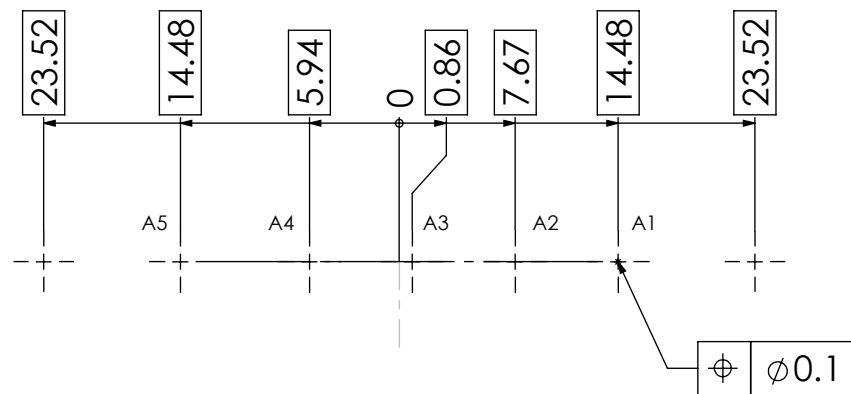

Permeability is tested for the whole connector. Permeability less than 1.0025

2	1	Shell	Brass (nonmagnetic)	tin plated		
1	1	Insulator	PBT (-55°C to +130°C) acc. UL94V-0	green		
No.	St.	Part	Type Description/Material	Surface plating/Colour/Class		
FUNCTIONAL SYMBOLS						
THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION						
DIMENSION UNITS		SCALE	MEASUREMENTS WITHOUT TOLERANCE ACC. TO ISO 2768-m	molex FCT D-Sub Mixed-Layout Connector NONMAGNETIC		
mm		2:1				
			CURRENT REVISION			
			DRWN: DRAWN BY msteinbrueck 26-07-2023 APPR: APPR BY mteubel 26-07-2023			
				PRODUCT CUSTOMER DRAWING		
2		24410	INITIAL REVISION			
1			DRWN: DRAWN BY birgit.rinder 14-08-2008 APPR: APPR BY sschref 18-08-2008			
REV.		CH.-NO.				
REPLACEMENT FOR:		FRIST ANGLE PROJECTION	DRAWING	DOCUMENT NUMBER	CUSTOMER	SHEET NUMBER
1731140492_Rev. A			A3-SIZE	FM5W5S-1386	GENERAL MARKET	1 OF 1