




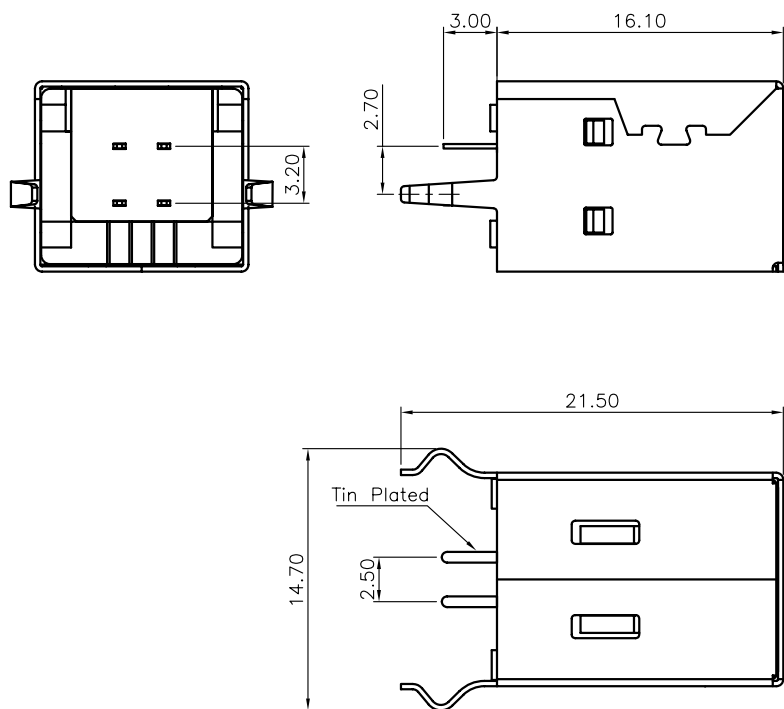


Specifications:
 Current Rating:1.0A AC/DC
 Voltage Rating:30V AC/DC
 Contact Resistance:20m ohm.Max.
 Insulation Resistance:1000M ohm.Min.
 Withstanding Voltage:750V AC/Minute
 Operating Temperature Range:-40°C To +105°C
 Material and Finish:
 Insulator:PBT (UL94V-0)
 Contact:Copper Alloy
 Plating:Gold Plated on Contact Area,
 Tin Plated on Solder Tail.
 Shell:Copper Alloy,Nickel Plated
 How To Order
 5075BS-04-XX-XX

Standard Selective Gold Plated
 30:Gold Plated 30u"
 WH:White BK:Black
 No Of Contacts
 B Type Straight

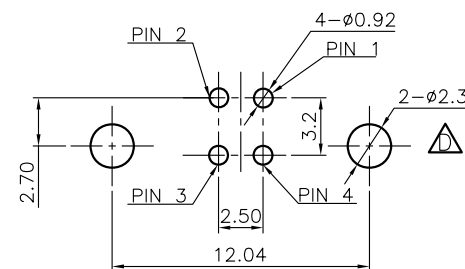

P.C.B. Layout

RoHS Compliant

				DRAWN: Leo	GENERAL TOLERANCE: .X=±0.20 .XX=±0.15	 繼德工業股份有限公司 Neltron Industrial Co., Ltd.	DESCRIPTION: USB B TYPE PCB FEMALE STRAIGHT	SIZE A4
D	17-NOV-2009	ECN-TW091104	Allen	CHECKED: Jeremy Liu	UNIT: MM SCALE:			
C	30-MAR-2009	ECN-TW090314	Allen	APPROVAL: Mike Wu	SHEET: 1 / 1	PART NO: 5075BS-04-XX-XX		
B	12-Sep-2008	ECN-CN080922	Leo		PROJECTION: 			
A	01-Jul-2008	(PC0001)	Leo					
REV	DATE	FILE	BY					