

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

Part Number: [63813-2700](#)
Status: **Active**
Description: Extraction Tool

Documents:

[RoHS Certificate of Compliance \(PDF\)](#)

General


Product Family	Application Tooling
Series	T0201
Comments	See Tooling Specification (PDF) Above
Function	Extraction
Geographic Area	Global
Level of Automation	Manual
More Detailed Tech Information	applicationtooling@molex.com
Product Name	PremiumGrade™
Survey	www.molex.com//review/apptool_survey.html
Tool Type	Handtool
UPC	756054924921

Material Info

Reference - Drawing Numbers

Application Tooling Documents

ATS-638132700, TM-638000029, TM-638000029CN, TM-638000029DE, TM-638000029FR, TM-638000029IT, TM-638000029JP, TM-638000029KR, TM-638000029MY, TM-638000029PL, TM-638000029RU, TM-638000029SK, TM-638000029SP, TM-638000029TH, TM-638000029TW, TM-638000029VN

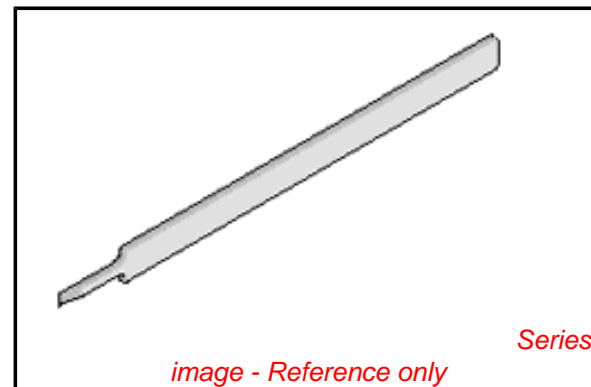

EU RoHS

ELV and RoHS Compliant

REACH SVHC

Not Reviewed

Low-Halogen Status

Not Reviewed

China RoHS



Need more information on product environmental compliance?

Email productcompliance@molex.com
 For a multiple part number RoHS Certificate of Compliance, [click here](#)

Please visit the [Contact Us](#) section for any non-product compliance questions.

Search Parts in this Series

T0201Series

Use With

43374 Sabre™, 43375 Sabre™

Application Tooling | **FAQ**

Description	Product #
1.00mm Pitch Crimp Terminal for Slimline Serial ATA Power Cable Receptacle, 0.38µm Gold (Au) Plating, Lead free High Normal Force Tabs, Unplated Brass, AWG 18-20	0476341002
High Normal Force Tabs, Tin Plated Brass, AWG 18-20	0945180100
High Normal Force Tabs, Tin Plated Brass, AWG 18-20	0945180101
Flat Blade Crimp Terminal, Series 41422, Female, With Tin (Sn) Plated Brass	0040021602

Contact, 14-18 AWG, Reel Packaged Sabre™ Crimp	0433752001
Terminal, Female, Double 18-20 AWG, 2.85mm Max. Insulation Diameter, Reel Packaged, Tin (Sn) Plated Brass Contact with TPA	
1.27mm Pitch Serial ATA Crimp Terminal for Power Cable Receptacle, Gold (Au) Flash Plating, with Reel Direction - Type 2, Lead free High Normal Force	0675810010 0945180200
2.29mm Diameter Pin Cluster Block Connector Terminal, Wire Range AWG 16-18 SPOX™ Crimp	0579206002 0008701030
Terminal 5194, 18-24 AWG, Brass, Bag SPOX™ Crimp	0008701031
Terminal 5194, 18-24 AWG, Brass, Reel SPOX™ Crimp	0039000021
Terminal 5194, 18-24 AWG, Phosphor Bronze, Reel SPOX™ Crimp	0039000022
Terminal 5194, 18-24 AWG, Phosphor Bronze, Bag Flat Blade Crimp	0040021601
Terminal, Series 41422, Female, With Tin (Sn) Plated Brass Contact, 10-12 AWG, Reel Packaged Earth Terminal for PT Bulb Socket, AVSS 0.50~0.85mm ² Wedge Terminal	0354658000 0354779002
14.50mm Pitch 6.35mm Tab Slip- On Wire-to-Wire Terminal, Female, 18-14 AWG, Tin- Plated	0357255110
6.35mm Tab Slip- On Wire-to-Wire Terminal, Female, 14-12 AWG, Tin- Plated	0357255210
Crimp Terminal	0357450110
35745, 20-22 AWG Crimp Terminal	0357450210
35745, 16-18 AWG	

Crimp Terminal 35745, 18+18, 20+20 AWG	0357450310
Tab Crimp Terminal 35745, Male, 24-26 AWG , (0.20 - 0.12mm ²), Brass, Pre-Tin Plated, Reel	0357450410
Crimp Terminal 35746, 20-22 AWG	0357460110
Crimp Terminal 35746, 16-18 AWG	0357460210
Crimp Terminal 35746, 18+18, 20+20 AWG	0357460310
Crimp Terminal 35746, 24-26 AWG	0357460410
Crimp Terminal 35747, 20-22 AWG	0357470110
Crimp Terminal 35747, 16-18 AWG	0357470210
Crimp Terminal 35747, 18+18, 20+20 AWG	0357470310
Tab Crimp Terminal 35747, Male, 24-26 AWG , (0.20 - 0.12mm ²), Brass, Pre-Tin Plated, Reel	0357470410
Crimp Terminal 35748, 20-22 AWG	0357480110
Crimp Terminal 35748, 16-18 AWG	0357480210
Crimp Terminal 35748, 18+18, 20+20 AWG	0357480310
Crimp Terminal 35748, 24-26 AWG	0357480410
Crimp Terminal 41422, 14-18 AWG, Reel	0414225001
Sabre™ Crimp Terminal, Female, 14-16 AWG, 0.79mm max. Insulation Diameter, Reel Packaged, Tin (Sn) Plated Brass Contact without TPA	0433740001
Sabre™ Crimp Terminal, Female, 14-16 AWG, 3.30mm max. Insulation Diameter, Reel Packaged, Tin (Sn) Plated Brass Contact with TPA	0433750001
Sabre™ Crimp Terminal, Female, Double 18 AWG, 4.57mm Max. Insulation Diameter, Reel Packaged, Tin (Sn) Plated Brass Contact with TPA	0433751001

4.00mm Pitch Board-0500988000
 In Crimp Terminal
 50098, 18-22 AWG,
 Reel, for 51036
 Housing

4.00mm Pitch Board-0500988100
 In Crimp Terminal,
 Male, 50098 Series,
 18-22 AWG, Bag, for
 51036 Housing

2.50mm Pitch 0501478000
 Mizu-P25™ Crimp
 Terminal, 50147,
 Reel

2.50mm Pitch 0501478100
 Mizu-P25™ Crimp
 Terminal, 50147,
 Bag

2.50mm Pitch 0501488000
 Mizu-P25™ Crimp
 Terminal, 50148,
 Reel

2.50mm Pitch 0501488100
 Mizu-P25™ Crimp
 Terminal, 50148,
 Bag

3.50mm Pitch Crimp 0502178000
 Terminal 50217,
 18-24 AWG, Reel,
 Phosphor Bronze

3.50mm Pitch Crimp 0502178100
 Terminal 50217,
 18-24 AWG, Bag,
 Phosphor Bronze

3.50mm Pitch Crimp 0502179001
 Terminal 50217,
 18-24 AWG, Reel,
 Brass

3.50mm Pitch Crimp 0502179101
 Terminal 50217,
 18-24 AWG, Bag,
 Brass

2.50mm Pitch Mini- 0503518000
 Lock™ Wire-to-
 Board and Wire-to-
 Wire Crimp Terminal,
 Phosphor Bronze,
 Reel, for 51102,
 51103 and 51163
 Housings

2.50mm Pitch Crimp 0503978000
 Terminal, 50397,
 Reel

2.50mm Pitch Crimp 0503978100
 Terminal, 50397,
 Bag

This document was generated on 10/04/2012

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION