

FEATURES AND SPECIFICATIONS

Features and Benefits

- Positive housing locks to mate with Mini-Fit, Jr. single row receptacles 5557
- Fully isolated terminals to protect contacts from damage
- Peg-mounted vertical headers for increased board retention
- Drain hole option available in vertical headers

Reference Information

Product Specification: PS-5556-0001
 Packaging: Tray or bag
 UL File No.: E29179
 CSA File No.: LR19980
 TUV License No.: R75142
 Mates With: 5557 single row receptacle
 Designed In: Millimeters

Electrical

Voltage: 600V
 Current: (Used with 16 AWG)

Circuits	2-3	4-6	7-10	12-24
Amperes-Jr.	9	8	7	6

Electrical (cont'd)

Contact Resistance: 10mΩ max.
 Dielectric Withstanding Voltage: 1500V AC
 Insulation Resistance: 1000 MΩ min.

Mechanical

Contact Insertion Force: 1.5kg max.
 Contact Retention to Housing: 3.0kg min.
 Wire Pull-Out Force: 9.0kg min.
 Insertion Force to PCB: 5.0kg max.
 Mating Force: 0.7kg (1.54 lb) max.
 Unmating Force: 0.35kg (0.7 lb) min.
 Normal Force: 200g min.
 Durability: 30 cycles


Physical

Housing: 6/6 nylon, UL 94V-2 or 94V-0
 Contact: Brass or Phosphor Bronze
 Plating: Tin, select Gold or overall Gold
 Operating Temperature: -40 to +105°C


molex® 4.20mm (.165") Pitch Mini-Fit, Jr.™ Header

5566

Vertical, Single Row With Pegs



CATALOG DRAWING (FOR REFERENCE ONLY)

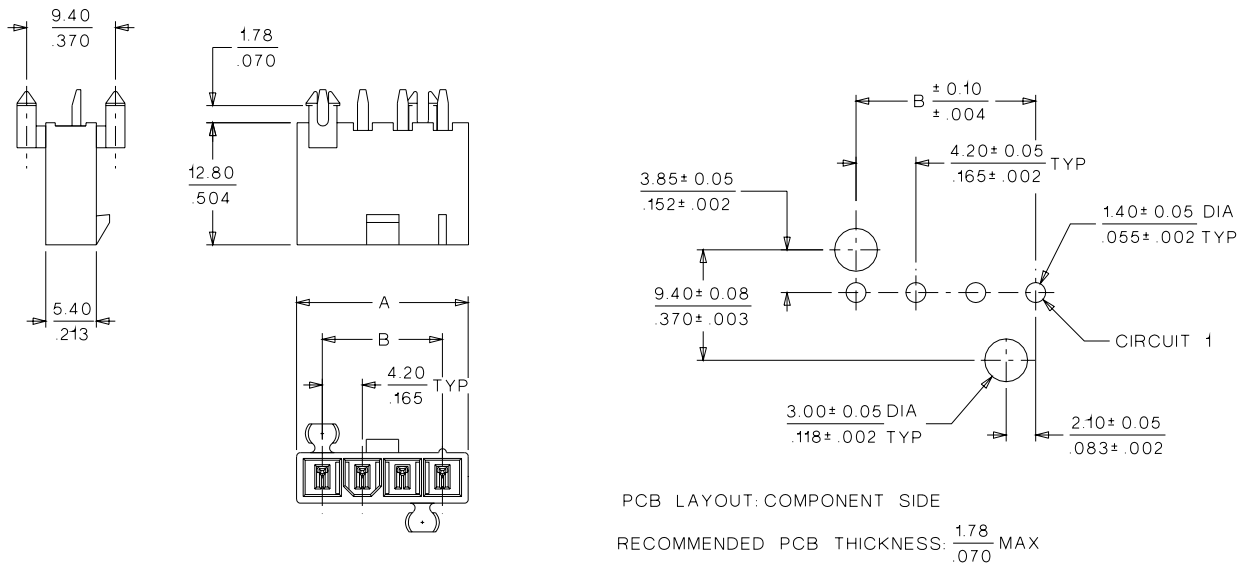

ORDERING INFORMATION AND DIMENSIONS

Circuits	Order No.				Drain Holes	Dimension	
	Tin Plated		Gold Plated (30μ")			A	B
	94V-2	94V-0	94V-2	94V-0			
3	• 39-30-1039	• 39-30-2030	• 39-30-2031	• 39-30-2032	No	13.80 (.543)	8.40 (.331)
	• 39-30-2035	• 39-30-2036	• 39-30-2037	• 39-30-2038	Yes		
4	• 39-30-2045		• 39-30-2047		No	18.00 (.709)	12.60 (.496)
					Yes		
5	• 39-30-2050		• 39-30-2052		No	22.20 (.874)	16.80 (.661)
	• 39-30-2056		• 39-30-2058		Yes		

• US Standard Product, available through Molex franchised distributors