
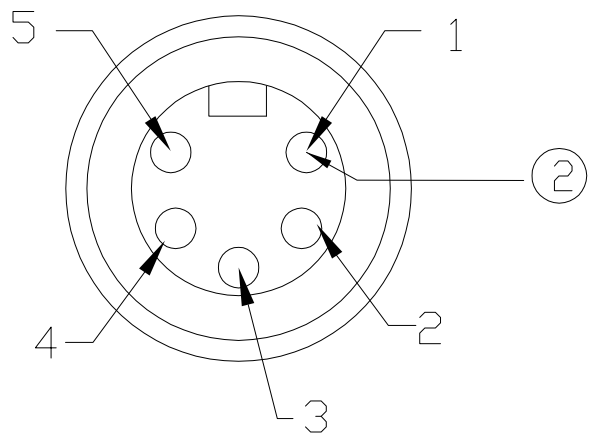
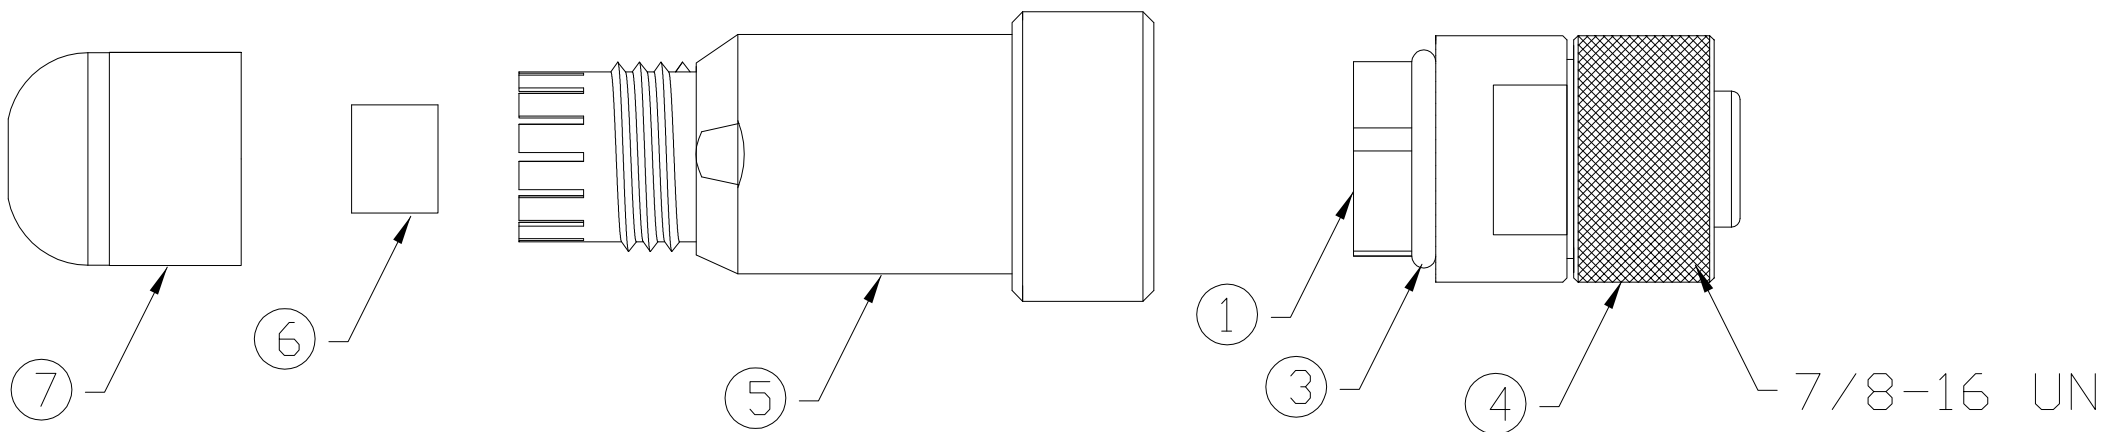
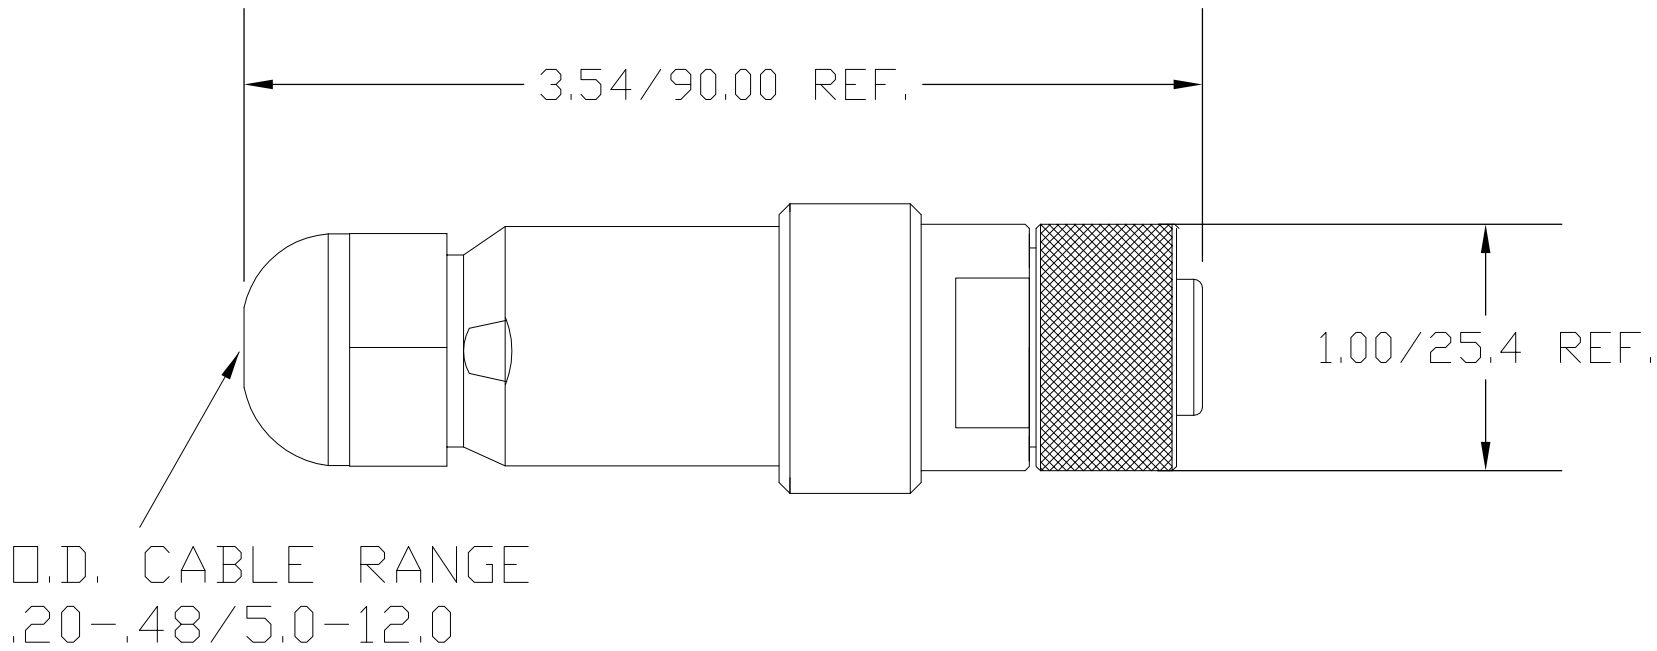


MATERIAL NUMBER	ENGINEERING PART NUMBER
1300340005	1A5000-34DN

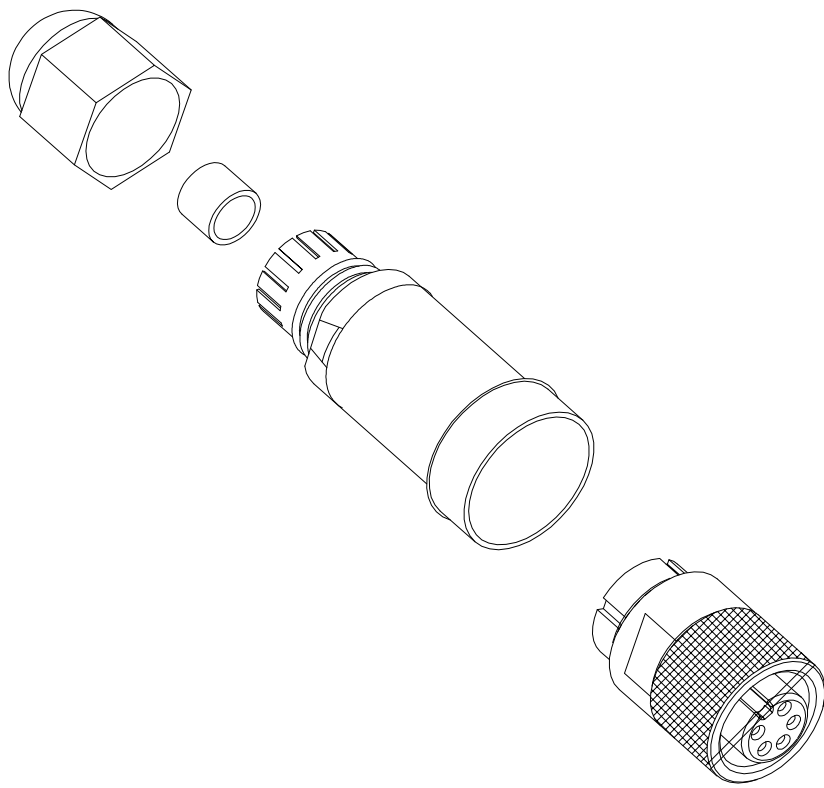

FEMALE FACE VIEW

1	DRAIN
2	RED
3	BLACK
4	WHITE
5	BLUE

WIRING CHART

VOLTAGE RATING	600VAC/VDC
AMPERAGE RATING	8 AMPS
PROTECTION	IP67
OPERATING TEMPERATURE	-20°C TO 80°C
CSA CERTIFICATIONS	CSA CERTIFIED, FILE NO. LR6837

ITEM	COMPONENT	MATERIAL	FINISH
1	INSERT	NYLON	BLACK
2	SOCKET CONTACTS	COPPER ALLOY	GOLD PLATED
3	O-RING	NITRILE	BLACK
4	COUPLING NUT	BRASS	NICKEL PLATED
5	MOLDED BODY	NYLON	BLACK
6	GROMMET	NITRILE	BLACK
7	CORD GRIP BODY	NYLON	BLACK

RELEASE EC NO: WNA2010-0081 DRWN: TWOLDEGE 8/25/09 CH'KD: BWOODMAN APPR: JFMURPHY 2009/08/27	DESCRIPTION	QUALITY SYMBOL <div>▽=0</div> <div>▽C=0</div>	GENERAL TOLERANCES (UNLESS SPECIFIED)			DIMENSION STYLE ----		SCALE ----	DESIGN UNITS INCH	THIRD ANGLE PROJECTION <div>⊙</div> <div>□</div>		
				mm	INCH	DRAWN BY TWOLDEGE	DATE 2009/08/25	TITLE MINI CHANGE ATTACHABLE 5-POLE FEMALE ST D-NET .20"-.48" CABLE RANGE MOLEX INCORPORATED				
			4 PLACES	±----	±---	CHECKED BY BWOODMAN	DATE 2009/08/25					
			3 PLACES	±.005	±.005	APPROVED BY JFMURPHY	DATE 2009/08/26					
			2 PLACES	±.013	±.010	MATERIAL NO. 1300340005	DOCUMENT NO. SD-130034-003					
			1 PLACE	±.025	±.020	SHEET NO. 1 OF 1						
			ANGULAR ±1/2°									
DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS			SIZE C	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION								