




THIN WALL TUBING

ATAB

Tubing Assortment Box

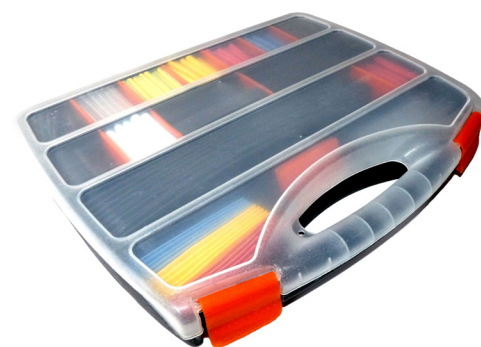

Applications

ATAB is ideal for small shops, repair shops, electrical workshops and test laboratories. Offering a large variety of different diameters and colors.

Features

Tubing polyolefin
Shrink ratio of 2:1
Flame retardant (except clear)

Various

Operating temperature: -55°C to + 125°C
Minimum shrink temperature: 80°C
Minimum fully recovery temperature: 100°C
RoHS compliant

Standard colors:
Please refer to table below

Technical data

Please refer to ACS-55 tubing data sheet

Assortment Box Composition

Item	Size (mm)		Colors	Length of sticks (mm)	Number of sticks per color (pcs)
	Before recovery (min)	After recovery (max)			
All Colors Tubing ACS Box : 384 pieces, 28 meters					
ATAB-CO	3,2	1,6	Clear, Grey, Red, Yellow, Blue, Green, Yellow/Green, White	50	15
	4,8	2,4	Clear, Grey, Red, Yellow, Blue, Green, Yellow/Green, White	50	10
	6,4	3,2	Clear, Grey, Red, Yellow, Blue, Green, Yellow/Green, White	50	8
	9,5	4,8	Clear, Grey, Red, Yellow, Blue, Green, Yellow/Green, White	85	5
	12,7	6,4	Clear, Grey, Red, Yellow	120	5
	12,7	6,4	Blue, Green, Yellow/Green, White	85	5
	19,1	9,5	Red, Yellow, Green, Blue	200	5
	25,4	12,7	Red, Yellow, Green, Blue	200	5
All Black Tubing ACS Box : 950 pieces, 56 meters					
ATAB-BO	1,2	0,8	Black	50	200
	2,4	1,2	Black	50	300
	3,2	1,6	Black	50	200
	4,8	2,4	Black	50	100
	6,4	3,2	Black	85	70
	9,5	4,8	Black	85	25
	12,7	6,4	Black	85	20
	19,1	9,5	Black	20	20
	25,4	12,7	Black	200	15
Standard ACS Box : 595 pieces, 35 meters					
ATAB-ST	3,2	1,6	Black	50	100
	4,8	2,4	Clear, Yellow/Green, Yellow, Red, Blue, Black	50	50
	6,4	3,2	Black, White, Red	50	30
	9,5	4,8	Black, Clear	85	10
	12,7	6,4	Black	85	20
			Black	100	10
			Clear	85	10
	19,1	9,5	Black	100	10
			Black	250	5
			Blue, Red, Yellow, Clear	85	5
25,4	12,7	Black	200	5	
		Black	250	5	