

FEATURES AND SPECIFICATIONS

Features and Benefits

- Low profile
- Locking tang snaps into housing window for secure retention
- Dual-point contact design
- Anti-fishhooking box design protects contact area

Reference Information

Product Specification: PS-87437

Packaging: Reel

Wire Style: UL1061

UL File No.: E29179

CSA File No.: LR19980A

Use With: 87439 housing

Designed In: Millimeters

Electrical

Voltage: 30V

Current:

AWG	24	26	28
AMP	2	2	1.5

Contact Resistance: 40mΩ max.

Dielectric Withstanding Voltage: 500V AC

Insulation Resistance: 1000 MΩ min.

Physical

Contact: Phosphor Bronze

Plating: Tin

Wire Range: 24, 26, 28 AWG


Operating Temperature: -25 to +85°C

Insulation Diameter: 1.10mm dia. max.




1.50mm (.059") Pitch Wire-to-Board Crimp Terminal

87421

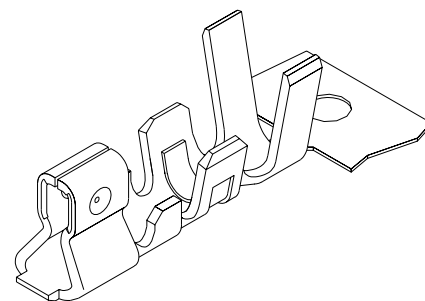

CATALOG DRAWING (FOR REFERENCE ONLY)

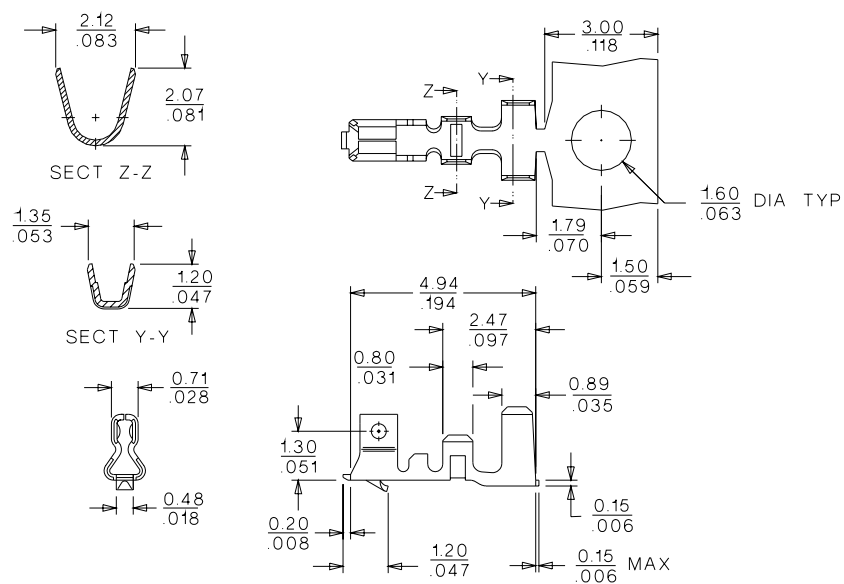

ORDERING INFORMATION

Order No.	Packaging
87421-0000	Reel

0.40 to 1.60mm (.016 to .063") Pitch

A