


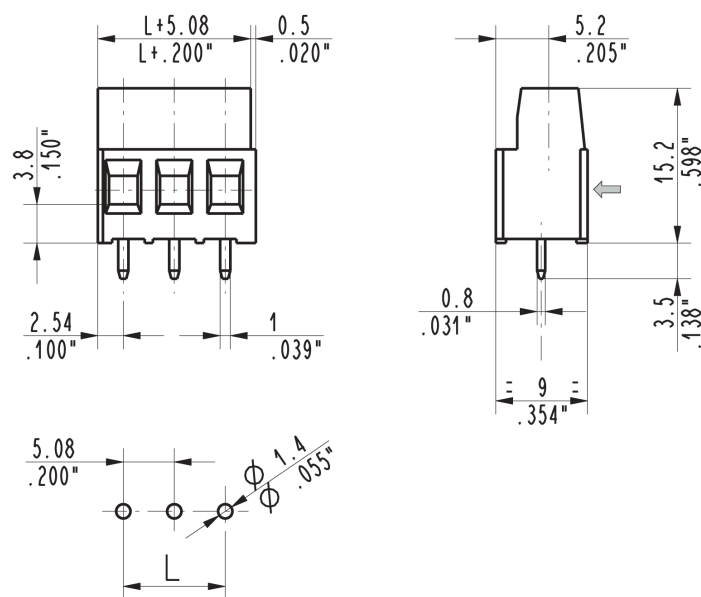

← wire entry

L = pitch x (poles - 1)

## MSM\_\_005

## straight, modular

5.08 mm / .200" pitch

| Poles | Code     | Pcs/pack. | W [kg]* | Pcs/Ind.** | W [kg]* |
|-------|----------|-----------|---------|------------|---------|
| 02    | MSM02005 | 900       | 2,70    | 2000       | 6,00    |
| 03    | MSM03005 | 600       | 2,70    | 1750       | 7,88    |
| 04    | MSM04005 | 400       | 2,40    | 1500       | 9,00    |
| 05    | MSM05005 | 350       | 2,63    | 1000       | 7,50    |
| 06    | MSM06005 | 300       | 2,70    | 750        | 6,75    |
| 07    | MSM07005 | 250       | 2,63    | 750        | 7,88    |
| 08    | MSM08005 | 200       | 2,40    | 750        | 9,00    |
| 09    | MSM09005 | 175       | 2,36    | 500        | 6,75    |
| 10    | MSM10005 | 175       | 2,63    | 500        | 7,50    |
| 11    | MSM11005 | 150       | 2,48    | 500        | 8,25    |
| 12    | MSM12005 | 150       | 2,70    | 500        | 9,00    |
| 13    | MSM13005 | 75        | 1,46    | 500        | 9,75    |
| 14    | MSM14005 | 75        | 1,58    | 250        | 5,25    |
| 15    | MSM15005 | 75        | 1,69    | 250        | 5,63    |
| 16    | MSM16005 | 75        | 1,80    | 250        | 6,00    |
| 17    | MSM17005 | 75        | 1,91    | 250        | 6,38    |
| 18    | MSM18005 | 75        | 2,03    | 250        | 6,75    |
| 19    | MSM19005 | 50        | 1,43    | 250        | 7,13    |
| 20    | MSM20005 | 50        | 1,50    | 250        | 7,50    |
| 21    | MSM21005 | 50        | 1,58    | 250        | 7,88    |
| 22    | MSM22005 | 50        | 1,65    | 250        | 8,25    |
| 23    | MSM23005 | 50        | 1,73    | 250        | 8,63    |
| 24    | MSM24005 | 50        | 1,80    | 250        | 9,00    |
| 25    | MSM25005 | 50        | 1,88    | 250        | 9,38    |