

FEATURES AND SPECIFICATIONS

Features and Benefits

- Sizes 2 to 8 circuits
- Same as 5197 but with second circuit void

Reference Information

Packaging: Bag
 UL File No.: E29179
 CSA File No.: LR19980
 Mates With: 5283-NA, 5284-NA, 5285-NA and 5286-NA headers
 Use With: 5194, 5225
 Designed In: Millimeters

Electrical

Voltage: 250V
 Current: 7.0A
 Contact Resistance: 10mΩ max.
 Dielectric Withstanding Voltage: 1500V AC/1 min.
 Insulation Resistance: 1000 MΩ min.


Physical

Housing: 6/6 nylon, UL 94V-2
 Operating Temperature: -40 to +105°C




5.08mm (.200") Pitch SPOX™ Crimp Terminal Housing

5198-N With Void

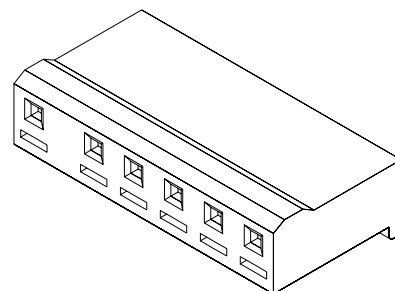

CATALOG DRAWING (FOR REFERENCE ONLY)

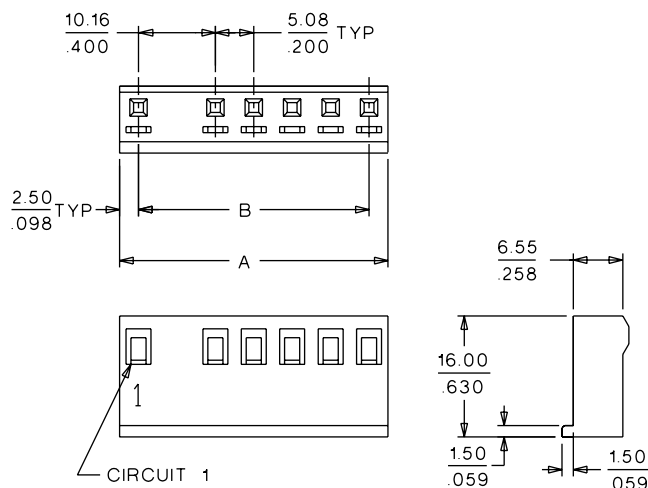

ORDERING INFORMATION AND DIMENSIONS

Circuits	Order No.	Dimension	
		A	B
2	10-22-1022	15.16 (.596)	10.16 (.399)
3	10-22-1032	20.24 (.796)	15.24 (.599)
4	10-22-1042	25.32 (.996)	20.32 (.799)
5	10-22-1052	30.40 (1.196)	25.40 (1.000)
6	10-22-1062	35.48 (1.396)	30.48 (1.199)
7	10-22-1072	40.56 (1.596)	35.56 (1.399)
8	10-22-1082	45.64 (1.796)	40.64 (1.599)