




REV.	EGR. NO.	DATE	SIGN.	DESCRIPTION
C	LEN-7A0296	2007/09/21	Gao Ling	Delete Cross.
D	LEN-880113~116	2008/03/10	Zhang Jin	Add Cross.
E	LEN-930903~906	2009/01/13	ZhaoRongFu	Update the drawing.

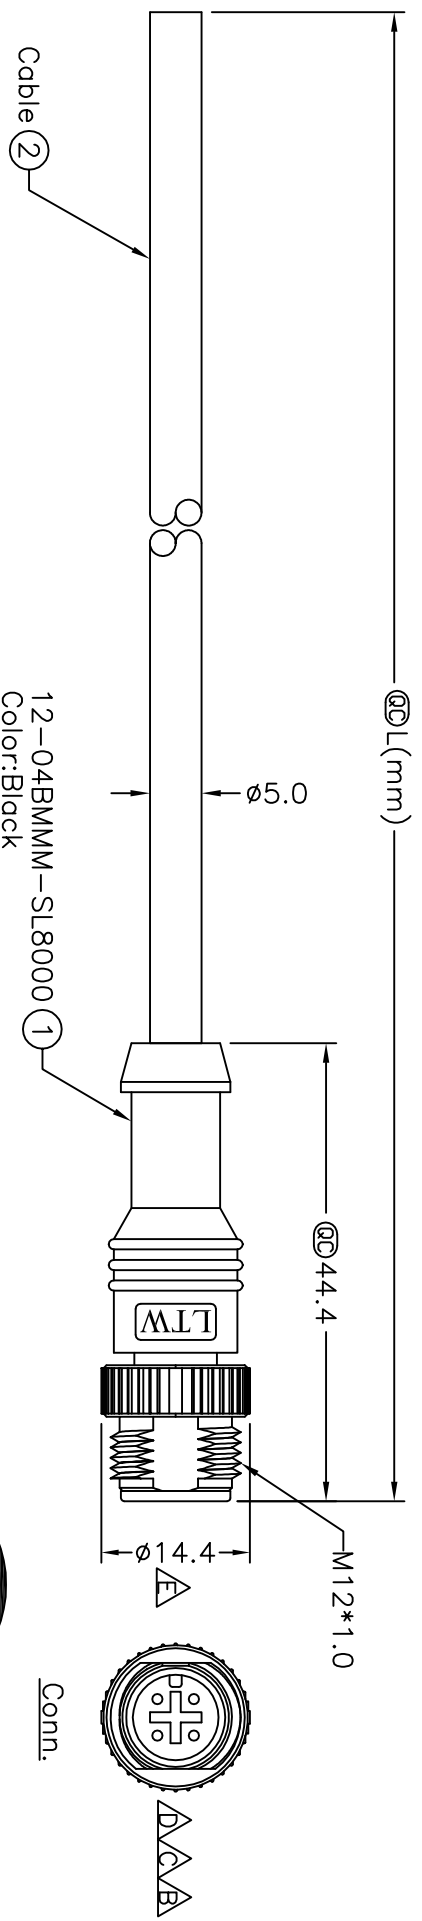


12-04BMMM-SL8AXX

- XX:01~99Meters
- 01:01Meter
- 02:02Meters
- ...
- 99:99Meters

Cable Length(L):01~99Meters

- Notes:
- * @L Important Dimension.
 - * Waterproof Rate:IP68.
 - In 1 meter water within 24 hours.
 - * Connector:Black,PU.
 - * Male Pin:Copper Alloy,Gold Plated.
 - * Cable:UL2464 22AWG*4C+Talcum,Black, PVC Jacket,UV Resistant,OD=5.0mm.
 - * Cable Length Tolerance: 01M:±40mm
 - 02M~05M:±60mm
 - 06M~10M:±100mm
 - 11M~30M:±200mm
 - 31M~99M:±500mm

Pin Assignments	Wire Color
4	Black
3	Blue
2	White
1	Brown
Conn.	Wire Color



Pin Assignments
Front View

UNIT:mm	
TOLERANCE	±0.5 mm

TITLE	M12 Conn
Cable Screw	4P M Conn M Pin
SCALE	Free
REV.	E
SIZE	A4
SHEET	1
OF	1
Inspection Item	@L

Amphenol LTW
安費諾亮泰企業股份有限公司

ITEM NO	DWG NO	CUSTOMER	DRAWN BY	CHECKED BY	APPROVED BY	DATE
	12-04BMMM-SL8AXX	ALTW	Zhao Rong Fu	Tina	Luke	2009/01/13
						2009/01/14
						2009/03/19