

**SPECIFICATION:**

Current rating: 1 A  
 Insulation resistance: 500 M $\Omega$  min.  
 Contact resistance: 30 m $\Omega$  max.  
 Dielectric voltage: 500 V AC  
 Operation temperature: -40 °C to +70 °C

**MATERIAL:**


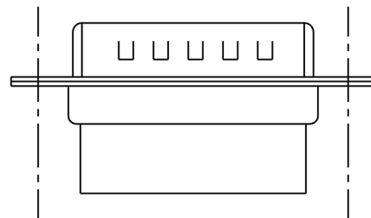
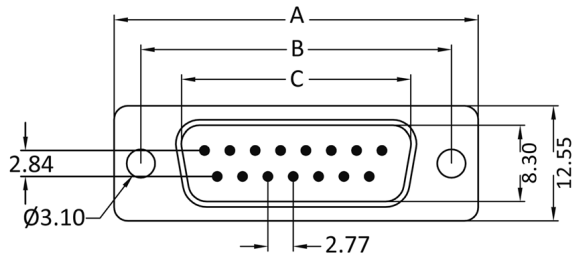
Insulator: PBT black UL94V-0  
 Shell: Steel

**FINISH:**

Shell: Tin plated

**HANDLING:**

Processing: Crimping  
 Packing: Tray

**Dimensions**

No. of contacts:	A:	B:	C:
9	30.85	25.00	16.92
15	39.25	33.35	25.25
25	53.10	47.04	38.96
37	69.40	63.50	55.42