



SPECIFICATION:

Current rating: 1 A
Insulation resistance: 500 MΩ min.
Contact resistance: 30 mΩ max.
Dielectric voltage: 500 V AC
Operation temperature: -40 °C to +70 °C

MATERIAL:




Insulator: PBT black UL94V-0
Shell: Steel

FINISH:

Shell: Tin plated

HANDLING:

Processing: Crimping
Packing: Tray

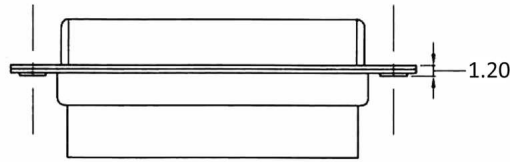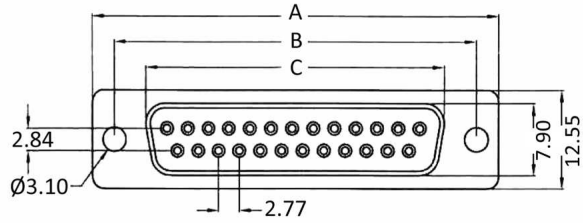

Dimensions

No. of contacts:	A:	B:	C:
9	30.85	25.00	16.40
15	39.25	33.35	24.70
25	53.10	47.04	38.52
37	69.40	63.50	54.85