

PicoBlade 1.25

WIRE TO BOARD CONNECTOR SYSTEM (GOLD-PLATING THROUGH HOLE VERTICAL)

Receptacle Terminal (26 – 28 AWG, gold flash)	Receptacle Terminal (28 – 32 AWG, gold flash)
Series: 500798020	Series: 500588020



Receptacle Terminal (26 – 28 AWG, 0.38µm gold)	Receptacle Terminal (28 – 32 AWG, 0.38µm gold)
Series: 500798025	Series: 500588025

[PicoBlade 1.25 W-t-B Connector System Web Page](#)

[TABLE OF CONTENT](#)

THIS DOCUMENT CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION

REVISION DESCRIPTION									
CHANGE NO.	PRODUCT SPECIFICATION FOR PICOBLADE 1.25 W/B TH VT TYPE GOLD PLATING CONNECTOR								
REVISOR	PRAMOD	DATE	2022/01/04	DOC TYPE	DOC TYPE DESCRIPTION		DOC PART	SERIES	
REV APPR BY	MRAMAKRISHNA	DATE	2022/01/05	PS	PRODUCT SPECIFICATION WORD		000	51021	
INITIAL RELEASE				CUSTOMER		DOCUMENT NUMBER		REVISION	SHEET
INITIAL DRWN	PRAMOD	DATE	2021/08/17	GENERAL	510211006-PS		B	1 OF 17	
INITIAL APPR	ISHWARG	DATE	2021/08/18						

Receptacle Housing	Plug Assembly (Right Angle Type)
	
Series: 51021	Series: 53047

[PicoBlade 1.25 W-t-B Connector System Web Page](#)

[TABLE OF CONTENT](#)

THIS DOCUMENT CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION

REVISION DESCRIPTION				<p align="center">PRODUCT SPECIFICATION FOR PICOBLADE 1.25 W/B TH VT TYPE GOLD PLATING CONNECTOR</p>			
CHANGE NO. 690784							
REVISED BY	PRAMOD	DATE	2022/01/04	DOC TYPE	DOC TYPE DESCRIPTION	DOC PART	SERIES
REV APPR BY	MRAMAKRISHNA	DATE	2022/01/05	PS	PRODUCT SPECIFICATION WORD	000	51021
INITIAL RELEASE				CUSTOMER	DOCUMENT NUMBER	REVISION	SHEET
INITIAL DRWN	PRAMOD	DATE	2021/08/17	GENERAL	510211006-PS	B	2 OF 17
INITIAL APPR	ISHWARG	DATE	2021/08/18				

Table of Contents

<u>ITEMS</u>	<u>PAGE</u>
1.0 SCOPE.....	4
2.0 PRODUCT DESCRIPTION.....	4
2.1 DESCRIPTION, SERIES NUMBER, AND LINKS	4
2.2 DIMENSIONS, MATERIALS, PLATINGS	4
2.3 ENVIRONMENTAL CONFORMANCE	4
2.4 SAFETY AGENCY LISTINGS.....	4
3.0 APPLICABLE DOCUMENTS AND SPECIFICATION.....	5
3.1 MOLEX DOCUMENTS	5
4.0 ELECTRICAL PERFORMANCE RATINGS.....	5
4.1 VOLTAGE	5
4.2 RATED CURRENT AND APPLICABLE WIRES	5
4.3 CURRENT DERATING	5
4.4 TEMPERATURE.....	6
4.5 DURABILITY	6
5.0 QUALIFICATION.....	6
6.0 PERFORMANCE.....	7
6.1 ELECTRICAL PERFORMANCE	7
6.2 MECHANICAL PERFORMANCE	8
6.3 ENVIRONMENTAL PERFORMANCE	9
7.0 INSERTION / WITHDRAWAL FORCE	11
8.0 CONTACT RESISTANCE MEASURING POINT	12
9.0 PACKAGING	12
10.0 INSTRUCTION UPON USAGE OF CRIMP TERMINAL.....	12
11.0 CABLE TIE AND / OR TWIST TIE LOCATION.....	13
12.0 NOTES.....	14

[PicoBlade 1.25 W-t-B Connector System Web Page](#)

[TABLE OF CONTENT](#)

THIS DOCUMENT CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION

**PRODUCT SPECIFICATION FOR PICOBLADE 1.25
W/B TH VT TYPE GOLD PLATING CONNECTOR**

REVISION DESCRIPTION									
CHANGE NO.	690784								
REVISED BY	PRAMOD	DATE	2022/01/04	DOC TYPE	DOC TYPE DESCRIPTION		DOC PART	SERIES	
REV APPR BY	MRAMAKRISHNA	DATE	2022/01/05	PS	PRODUCT SPECIFICATION WORD		000	51021	
INITIAL RELEASE				CUSTOMER		DOCUMENT NUMBER		REVISION	SHEET
INITIAL DRWN	PRAMOD	DATE	2021/08/17	GENERAL		510211006-PS		B	3 OF 17
INITIAL APPR	ISHWARG	DATE	2021/08/18						

1.0 SCOPE

This product specification covers the performance requirements for PicoBlade 1.25 mm W/B CONNECTOR (SINGLE-ROW TH VT GOLD PLATING TYPE) series for use by

2.0 PRODUCT DESCRIPTION

2.1 DESCRIPTION, SERIES NUMBER, AND LINKS

DESCRIPTION		GOLD PLATING THICKNESS	PART NUMBER	DRAWING NUMBER
Receptacle Terminal	AWG #28-#32	FLASH	500588020	500580000-SD PSD 000
		0.38 micro-meters MIN	500588025	
	AWG #26-28	FLASH	500798020	500790000-SD PSD 000
		0.38 micro-meters MIN	500798025	
Receptacle Housing			51021**00	510210000-SD
Plug Assembly (Right Angle Type)		FLASH	53047**60	530470001-SD
		0.38 micro-meters MIN	53047**70	

2.2 DIMENSIONS, MATERIALS, PLATINGS

See the appropriate sales drawings for the information on dimensions, materials, platings and markings.

2.3 ENVIRONMENTAL CONFORMANCE

To find product compliance information:

- a. [Go to molex.com](#)
- b. Enter the part number in the search field.
- c. At the bottom of the page go to "Environmental" to see compliance status.

2.4 SAFETY AGENCY LISTINGS

UL File Number: E29179

[PicoBlade 1.25 W-t-B Connector System Web Page](#)

[TABLE OF CONTENT](#)

THIS DOCUMENT CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION

REVISION DESCRIPTION		PRODUCT SPECIFICATION FOR PICOBLADE 1.25 W/B TH VT TYPE GOLD PLATING CONNECTOR					
CHANGE NO.	690784						
REVISED BY	PRAMOD	DATE	2022/01/04	DOC TYPE	DOC TYPE DESCRIPTION	DOC PART	SERIES
REV APPR BY	MRAMAKRISHNA	DATE	2022/01/05	PS	PRODUCT SPECIFICATION WORD	000	51021
INITIAL RELEASE			CUSTOMER		DOCUMENT NUMBER	REVISION	SHEET
INITIAL DRWN	PRAMOD	DATE	2021/08/17	GENERAL	510211006-PS	B	4 OF 17
INITIAL APPR	ISHWARG	DATE	2021/08/18				

3.0 APPLICABLE DOCUMENTS AND SPECIFICATION

3.1 MOLEX DOCUMENTS

ATS – Application Tooling Specification*

4.0 ELECTRICAL PERFORMANCE RATINGS

4.1 VOLTAGE

125 V AC (rms) / DC

4.2 RATED CURRENT AND APPLICABLE WIRES

Wire Size	Rated Current (MAX.)	Insulation O.D.
AWG #26	1.0 A	Insulation Diameter* 50058802*: ϕ 1.0 mm Max. 50079802*: ϕ 1.04 mm Max.
AWG #28	1.0 A	
AWG #30	1.0 A	
AWG #32	0.8 A	

*Application Tooling Specification for terminals is not provided in this document. ATS for terminals can be available from respective terminal part number page in Molex.com

4.3 CURRENT DERATING

AWG	2-circuits	8-circuits	15-circuits
	Current (A)	Current (A)	Current (A)
26	2.5	1.5	1.0
28	2.0	1.5	1.0
30	1.5	1.0	1.0
32	1.5	1.0	0.8

1. Values are for REFERENCE ONLY.
2. Current deratings are based on not exceeding 30 °C Temperature Rise
3. Temperature Rise is measured in barrel area of crimp terminal.
4. PCB trace design can greatly affect temperature rise results.
5. Data is for all circuits powered.

[PicoBlade 1.25 W-t-B Connector System Web Page](#)

[TABLE OF CONTENT](#)

THIS DOCUMENT CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION

REVISION DESCRIPTION		PRODUCT SPECIFICATION FOR PICOBLADE 1.25 W/B TH VT TYPE GOLD PLATING CONNECTOR					
CHANGE NO.	690784						
REVISED BY	PRAMOD	DATE	2022/01/04	DOC TYPE	DOC TYPE DESCRIPTION	DOC PART	SERIES
REV APPR BY	MRAMAKRISHNA	DATE	2022/01/05	PS	PRODUCT SPECIFICATION WORD	000	51021
INITIAL RELEASE				CUSTOMER	DOCUMENT NUMBER	REVISION	SHEET
INITIAL DRWN	PRAMOD	DATE	2021/08/17	GENERAL	510211006-PS	B	5 OF 17
INITIAL APPR	ISHWARG	DATE	2021/08/18				

4.4 TEMPERATURE

Ambient Temperature Range*1 : - 40 °C ~ + 85 °C

NOTE:

- *1. Non-operating connectors after reflow must follow the operating temperature range condition.
- *2. Including terminal temperature rise.
- *3. Applicable wires must also meet the specified temperature range.

4.5 DURABILITY

Plating Type	Number of Cycles
Gold Plated	30 cycles

5.0 QUALIFICATION

Sample selection is in accordance with EIA-364-1000.

[PicoBlade 1.25 W-t-B Connector System Web Page](#)

[TABLE OF CONTENT](#)

THIS DOCUMENT CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION

REVISION DESCRIPTION	PRODUCT SPECIFICATION FOR PICOBLADE 1.25 W/B TH VT TYPE GOLD PLATING CONNECTOR						
CHANGE NO.	690784						
REVISED BY	PRAMOD	DATE	2022/01/04	DOC TYPE	DOC TYPE DESCRIPTION	DOC PART	SERIES
REV APPR BY	MRAMAKRISHNA	DATE	2022/01/05	PS	PRODUCT SPECIFICATION WORD	000	51021
INITIAL RELEASE				CUSTOMER	DOCUMENT NUMBER	REVISION	SHEET
INITIAL DRWN	PRAMOD	DATE	2021/08/17	GENERAL	510211006-PS	B	6 OF 17
INITIAL APPR	ISHWARG	DATE	2021/08/18				

6.0 PERFORMANCE

6.1 ELECTRICAL PERFORMANCE

ITEM	DESCRIPTION	TEST CONDITION	REQUIREMENT	
6.1.1	Contact Resistance	Mate connectors and measured by dry circuit, 20 mV MAX., 10 mA. MAX. (JIS C5402-2-1)	20 milliohms MAX.	
6.1.2	Insulation Resistance	Mate connectors, Apply 500 V DC between adjacent terminal or ground. (JIS C5402-3-1 / MIL-STD-202 Method 302)	100 Megohms MIN.	
6.1.3	Dielectric Strength	Mate connectors, apply 250 V AC (rms) for 1 minute between adjacent terminal or between terminal and ground. (JIS C5402-4-1/MIL-STD-202 Method 301)	No Damage on function	
6.1.4	Contact Resistance on crimped portion	Crimp the applicable wire to the terminal, measured by dry circuit, 20 mV MAX., 10 mA. MAX.	5 milliohms MAX.	
6.1.5	Temperature Rise	Mate connectors and all crimp terminals shall be connected in a direct series. The temperature rise shall be measured when the terminal reaches thermal equilibrium allowable current. (UL498)	Temperature Rise	30 °C MAX.

[PicoBlade 1.25 W-t-B Connector System Web Page](#)

[TABLE OF CONTENT](#)

THIS DOCUMENT CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION

REVISION DESCRIPTION	PRODUCT SPECIFICATION FOR PICOBLADE 1.25 W/B TH VT TYPE GOLD PLATING CONNECTOR						
CHANGE NO.	690784						
REVISED BY	PRAMOD	DATE	2022/01/04	DOC TYPE	DOC TYPE DESCRIPTION	DOC PART	SERIES
REV APPR BY	MRAMAKRISHNA	DATE	2022/01/05	PS	PRODUCT SPECIFICATION WORD	000	51021
INITIAL RELEASE				CUSTOMER	DOCUMENT NUMBER	REVISION	SHEET
INITIAL DRWN	PRAMOD	DATE	2021/08/17	GENERAL	510211006-PS	B	7 OF 17
INITIAL APPR	ISHWARG	DATE	2021/08/18				

6.2 MECHANICAL PERFORMANCE

ITEM	DESCRIPTION	TEST CONDITION		REQUIREMENT	
6.2.1	Insertion and Withdrawal Force	Insert and withdraw connectors at the speed rate of 25 ± 3 mm/minute.		Refer to section 7	
6.2.2	Crimping Pull out Force	Fix the crimped terminal to the jig, apply axial pull out force on the wire at the speed rate of 25 ± 3 mm/minute. (JIS C5402-16-4)	AWG #26	19.6 N {2.0 kgf} MIN	
			AWG #28	9.8 N {1.0 kgf} MIN	
			AWG #30	4.9 N {0.5 kgf} MIN	
			AWG #32	3.4 N {0.3 kgf} MIN	
6.2.3	Crimp Terminal Insertion Force	Insert the crimped terminal into the housing, period.		4.9 N {0.5 kgf} MAX	
6.2.4	Crimp Terminal Retention Force	Apply axial pull out force at the speed rate of 25 ± 3 mm/minute on the crimped terminal assembled in the housing.		4.9 N {0.5 kgf} MIN	
6.2.5	Header Terminal Retention Force	Apply axial push out force at the speed rate of 25 ± 3 mm/minute on the terminal assembled in the housing.		4.9 N {0.5 kgf} MIN	
6.2.6	Repeated Insertion / Withdrawal	Insert and withdraw connectors 30 cycles repeatedly by rate of less than 10 cycles per minute maximum		Contact Resistance	40 milliohms MAX.
6.2.7	Vibration	Mate connectors and subject to the following vibration conditions, for a period of 2 hours in each of 3 mutually perpendicular axes, passing DC 1mA during the test. (Fix the cable at test.) Amplitude : 1.5 mm P-P Frequency : 10~55~10 Hz in 1 minute. Duration : 2 hours in each X.Y.Z. axes. (JIS C 60068-2-6 / MIL-STD-202 Method 201)		Appearance	No Damage on function
				Contact Resistance	40 milliohms MAX.
				Discontinuity	1.0 microsecond MAX.
6.2.8	Mechanical Shock	Mate connectors and subject to the following shock conditions. 3 shocks shall be applied along 6 mutually perpendicular axes, passing DC 1 mA current during the test. (Total of 18 shocks) Test pulse : Half Sine Peak value : 490 m/s ² {50 G} Duration : 11 ms (JIS C60068-2-27 / MIL-STD-202 Method 213)		Appearance	No Damage on function
				Contact Resistance	40 milliohms MAX.
				Discontinuity	1.0 microsecond MAX.

[PicoBlade 1.25 W-t-B Connector System Web Page](#)

[TABLE OF CONTENT](#)

THIS DOCUMENT CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION

REVISION DESCRIPTION	PRODUCT SPECIFICATION FOR PICOBLADE 1.25 W/B TH VT TYPE GOLD PLATING CONNECTOR						
CHANGE NO.	690784						
REVISED BY	PRAMOD	DATE	2022/01/04	DOC TYPE	DOC TYPE DESCRIPTION	DOC PART	SERIES
REV APPR BY	MRAMAKRISHNA	DATE	2022/01/05	PS	PRODUCT SPECIFICATION WORD	000	51021
INITIAL RELEASE				CUSTOMER	DOCUMENT NUMBER	REVISION	SHEET
INITIAL DRWN	PRAMOD	DATE	2021/08/17	GENERAL	510211006-PS	B	8 OF 17
INITIAL APPR	ISHWARG	DATE	2021/08/18				

6.3 ENVIRONMENTAL PERFORMANCE

ITEM	DESCRIPTION	TEST CONDITION	REQUIREMENT	
6.3.1	Temperature Cycling	Mate connectors and subject to the following conditions for 5 cycles. Upon completion of the exposure period, the test specimens shall be conditioned at ambient room conditions for 1 to 2 hours, after which the specified measurements shall be performed. 5 cycles of : a) - 55 ± 3 °C 30 minutes b) + 85 ± 2 °C 30 minutes Shift time : Within 5 minutes (JIS C60068-2-14)	Appearance	No Damage on function
			Contact Resistance	40 milliohms MAX
6.3.2	Heat Resistance	Mate connectors and expose to 85 ± 2 °C for 96 hours. Upon completion of the exposure period, the test specimens shall be conditioned at ambient room conditions for 1 to 2 hours, after which the specified measurements shall be performed. (JIS C60068-2-2 / MIL-STD-202 Method 108)	Appearance	No Damage on function
			Contact Resistance	40 milliohms MAX
6.3.3	Cold Resistance	Mate connectors and expose to -40 ± 3 °C for 96 hours. Upon completion of the exposure period, the test specimens shall be conditioned at ambient room conditions for 1 to 2 hours, after which the specified measurements shall be performed. (JIS C60068-2-1)	Appearance	No Damage on function
			Contact Resistance	40 milliohms MAX
6.3.4	Humidity	Mate connectors and expose to 60 ± 2 °C, relative humidity 90 to 95% for 96 hours. Upon completion of the exposure period, the test specimens shall be conditioned at ambient room conditions for 1 to 2 hours, after which the specified measurements shall be performed. (JIS C60068-2-78 / MIL-STD-202 Method 103)	Appearance	No Damage on function
			Contact Resistance	40 milliohms MAX
			Dielectric Strength	Must meet 6.1.3
			Insulation Resistance	10 Megaohms MIN

[PicoBlade 1.25 W-t-B Connector System Web Page](#)

[TABLE OF CONTENT](#)

THIS DOCUMENT CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION

REVISION DESCRIPTION	PRODUCT SPECIFICATION FOR PICOBLADE 1.25 W/B TH VT TYPE GOLD PLATING CONNECTOR						
CHANGE NO.	690784						
REVISED BY	PRAMOD	DATE	2022/01/04	DOC TYPE	DOC TYPE DESCRIPTION	DOC PART	SERIES
REV APPR BY	MRAMAKRISHNA	DATE	2022/01/05	PS	PRODUCT SPECIFICATION WORD	000	51021
INITIAL RELEASE				CUSTOMER	DOCUMENT NUMBER	REVISION	SHEET
INITIAL DRWN	PRAMOD	DATE	2021/08/17	GENERAL	510211006-PS	B	9 OF 17
INITIAL APPR	ISHWARG	DATE	2021/08/18				

6.3 ENVIRONMENTAL PERFORMANCE CONTINUED

ITEM	DESCRIPTION	TEST CONDITION	REQUIREMENT	
6.3.5	Salt Spray	Mate connectors and expose to the following salt mist conditions. Upon completion of the exposure period, salt deposits shall be removed by a gentle wash or dip in running water, after which the specified measurements shall be performed. NaCl solution Concentration : 5 ± 1% Spray time : 48 ± 4 hours Ambient temperature : 35 ± 2 °C (JIS 60068-2-11 / MIL-STD-202 Method 101)	Appearance	No Damage on function
			Contact Resistance	40 milliohms MAX
6.3.6	SO ₂ Gas	Mated connectors and expose to the conditions of 50 ± 5 ppm SO ₂ gas ambient temperature 40 ± 2 °C for 24 hours.	Appearance	No Damage on function
			Contact Resistance	40 milliohms MAX
6.3.7	NH ₃ Gas	Mated connectors and expose to the conditions of NH ₃ gas evaporating from 28% NH ₃ solution for 40 minutes. (Rate is 25 ml per 1L)	Appearance	No Damage on function
			Contact Resistance	40 milliohms MAX
6.3.8	Solderability	Dip terminal or pin into flux, and immerse the area up to 0.8 mm from the bottom of the housing into solder molten at 245 ± 3 °C for 3 ± 0.5 sec.	Solder Wetting	95% of immersed area must show no voids, pin holes
6.3.9	Resistance to Soldering Heat	Soldering bath method Dip terminal or pin into immerse the area up to 0.8 mm from the bottom of the housing into solder molten at 260 ± 5 °C for 10 ± 0.5 sec.	Appearance	No Damage on function
		<u>(Reflow by Manual Soldering iron)</u> Using a soldering iron (350± 10 °C for 5 seconds MAX.) heat up. However, do not apply excessive pressure to either the terminals.		

() : Reference Standard
{ } : Reference Unit

[PicoBlade 1.25 W-t-B Connector System Web Page](#)

[TABLE OF CONTENT](#)

THIS DOCUMENT CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION

REVISION DESCRIPTION	PRODUCT SPECIFICATION FOR PICOBLADE 1.25 W/B TH VT TYPE GOLD PLATING CONNECTOR						
CHANGE NO.	690784						
REVISED BY	PRAMOD	DATE	2022/01/04	DOC TYPE	DOC TYPE DESCRIPTION	DOC PART	SERIES
REV APPR BY	MRAMAKRISHNA	DATE	2022/01/05	PS	PRODUCT SPECIFICATION WORD	000	51021
INITIAL RELEASE				CUSTOMER	DOCUMENT NUMBER	REVISION	SHEET
INITIAL DRWN	PRAMOD	DATE	2021/08/17	GENERAL	510211006-PS	B	10 OF 17
INITIAL APPR	ISHWARG	DATE	2021/08/18				

7.0 INSERTION / WITHDRAWAL FORCE

No of CKT	Unit	Insertion force (MAX)			Withdrawal force (MIN)		
		1st	6th	30th	1st	6th	30th
2	N { kgf }	19.6 { 2.0 }	17.6 { 1.8 }	15.6 { 1.6 }	2.8 { 0.28 }	2.3 { 0.23 }	1.8 { 0.18 }
3	N { kgf }	24.5 { 2.5 }	22.5 { 2.3 }	20.5 { 2.1 }	3.0 { 0.30 }	2.5 { 0.25 }	2.0 { 0.20 }
4	N { kgf }	29.4 { 3.0 }	27.4 { 2.8 }	25.4 { 2.6 }	3.3 { 0.33 }	2.8 { 0.28 }	2.3 { 0.23 }
5	N { kgf }	34.3 { 3.5 }	32.3 { 3.3 }	30.3 { 3.1 }	3.8 { 0.38 }	3.3 { 0.33 }	2.8 { 0.28 }
6	N { kgf }	39.2 { 4.0 }	37.2 { 3.8 }	35.2 { 3.6 }	4.3 { 0.43 }	3.8 { 0.38 }	3.3 { 0.33 }
7	N { kgf }	44.1 { 4.5 }	42.1 { 4.3 }	40.1 { 4.1 }	4.7 { 0.48 }	4.3 { 0.43 }	3.8 { 0.38 }
8	N { kgf }	49.0 { 5.0 }	47.0 { 4.8 }	45.0 { 4.6 }	5.2 { 0.53 }	4.7 { 0.48 }	4.3 { 0.43 }
9	N { kgf }	53.9 { 5.5 }	51.9 { 5.3 }	49.9 { 5.1 }	5.5 { 0.56 }	5.0 { 0.51 }	4.5 { 0.46 }
10	N { kgf }	58.8 { 6.0 }	56.8 { 5.8 }	54.8 { 5.6 }	5.8 { 0.59 }	5.3 { 0.54 }	4.8 { 0.49 }
11	N { kgf }	63.7 { 6.5 }	61.7 { 6.3 }	59.7 { 6.1 }	6.1 { 0.62 }	5.6 { 0.57 }	5.1 { 0.52 }
12	N { kgf }	68.6 { 7.0 }	66.6 { 6.8 }	64.6 { 6.6 }	6.4 { 0.65 }	5.9 { 0.60 }	5.4 { 0.55 }
13	N { kgf }	73.5 { 7.5 }	71.5 { 7.3 }	69.5 { 7.1 }	6.7 { 0.68 }	6.2 { 0.63 }	5.7 { 0.58 }
14	N { kgf }	78.4 { 8.0 }	76.4 { 7.8 }	74.4 { 7.6 }	7.0 { 0.71 }	6.5 { 0.66 }	6.0 { 0.61 }
15	N { kgf }	83.3 { 8.5 }	81.3 { 8.3 }	79.3 { 8.1 }	7.3 { 0.74 }	6.8 { 0.69 }	6.3 { 0.64 }


[PicoBlade 1.25 W-t-B Connector System Web Page](#)

[TABLE OF CONTENT](#)

THIS DOCUMENT CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION

REVISION DESCRIPTION	PRODUCT SPECIFICATION FOR PICOBLADE 1.25 W/B TH VT TYPE GOLD PLATING CONNECTOR								
CHANGE NO.	690784								
REVISED BY	PRAMOD	DATE	2022/01/04	DOC TYPE	DOC TYPE DESCRIPTION		DOC PART	SERIES	
REV APPR BY	MRAMAKRISHNA	DATE	2022/01/05	PS	PRODUCT SPECIFICATION WORD		000	51021	
INITIAL RELEASE				CUSTOMER		DOCUMENT NUMBER		REVISION	SHEET
INITIAL DRWN	PRAMOD	DATE	2021/08/17	GENERAL		510211006-PS		B	11 OF 17
INITIAL APPR	ISHWARG	DATE	2021/08/18						

8.0 CONTACT RESISTANCE MEASURING POINT

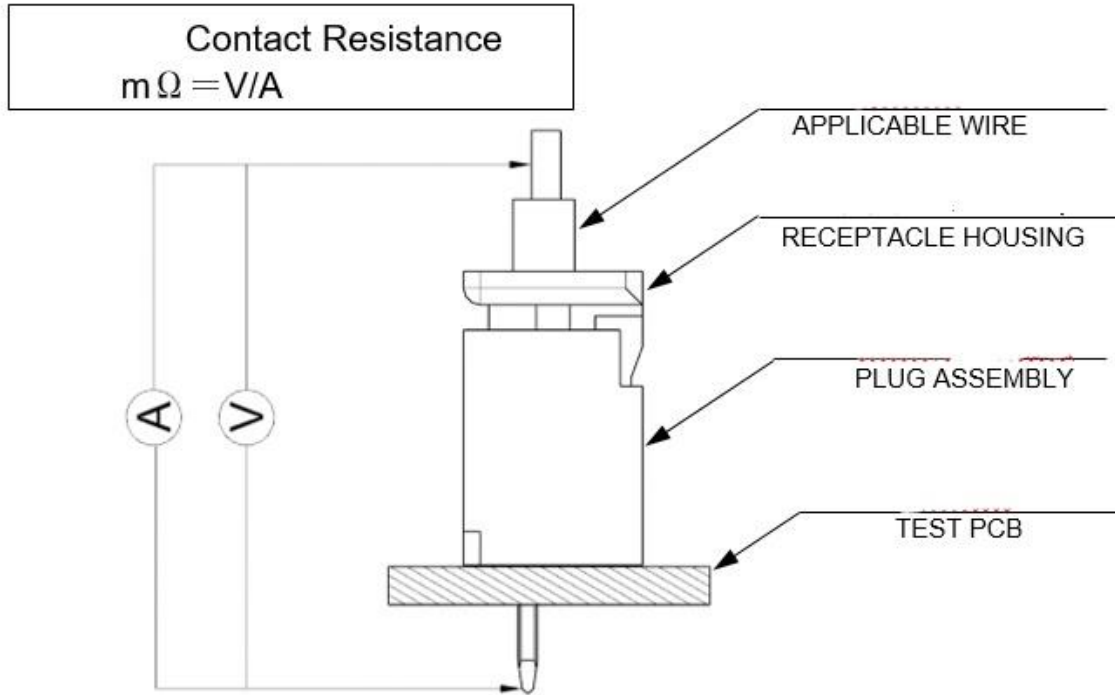

9.0 PACKAGING

Parts shall be packaging to protect the parts from damage during standard shipping, storage, and handling. Refer Molex.com specific part number webpage to get the exact packaging document for that item.

10.0 INSTRUCTION UPON USAGE OF CRIMP TERMINAL

Please refer to AS-56000-001 for usage of CRIMP TERMINAL.

[PicoBlade 1.25 W-t-B Connector System Web Page](#)


[TABLE OF CONTENT](#)

THIS DOCUMENT CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION

REVISION DESCRIPTION		PRODUCT SPECIFICATION FOR PICOBLADE 1.25 W/B TH VT TYPE GOLD PLATING CONNECTOR					
CHANGE NO.	690784						
REVISED BY	PRAMOD	DATE	2022/01/04	DOC TYPE	DOC TYPE DESCRIPTION	DOC PART	SERIES
REV APPR BY	MRAMAKRISHNA	DATE	2022/01/05	PS	PRODUCT SPECIFICATION WORD	000	51021
INITIAL RELEASE				CUSTOMER	DOCUMENT NUMBER	REVISION	SHEET
INITIAL DRWN	PRAMOD	DATE	2021/08/17	GENERAL	510211006-PS	B	12 OF 17
INITIAL APPR	ISHWARG	DATE	2021/08/18				

11.0 CABLE TIE AND / OR TWIST TIE LOCATION

CKT Size	Dim T Min.
All ckt	50 mm

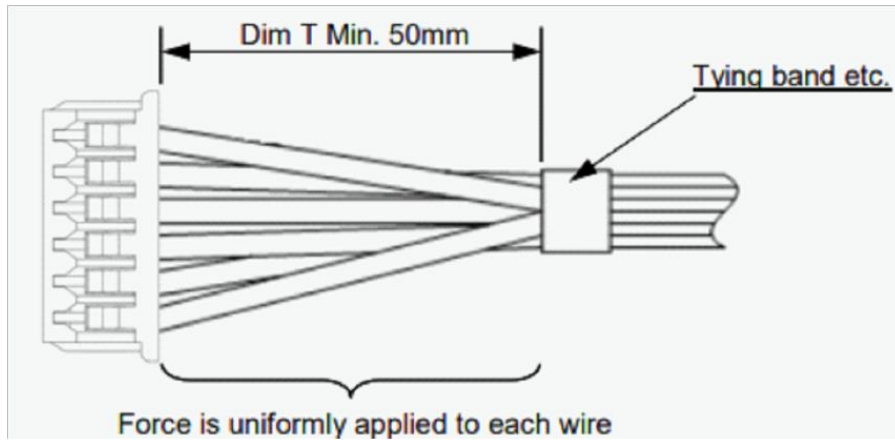

The "T" dimension defines a "free" length of wire, or a length of wire that is not subject to significant bias by external factors such as a wire tie, wire twisting, or other means of bending or deforming of the wires that repositions them from their natural relaxed state or location where they enter the housing. Wires are to be dressed in such a manner to allow the terminals to float freely in the pocket. This dimension is general recommendation and may need to be adjusted for different wire gauges and wire type and insulation thickness and insulation material.

[PicoBlade 1.25 W-t-B Connector System Web Page](#)

[TABLE OF CONTENT](#)

THIS DOCUMENT CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION

PRODUCT SPECIFICATION FOR PICOBLADE 1.25 W/B TH VT TYPE GOLD PLATING CONNECTOR

REVISION DESCRIPTION								
CHANGE NO.	690784							
REVISED BY	PRAMOD	DATE	2022/01/04	DOC TYPE	DOC TYPE DESCRIPTION		DOC PART	SERIES
REV APPR BY	MRAMAKRISHNA	DATE	2022/01/05	PS	PRODUCT SPECIFICATION WORD		000	51021
INITIAL RELEASE				CUSTOMER	DOCUMENT NUMBER		REVISION	SHEET
INITIAL DRWN	PRAMOD	DATE	2021/08/17	GENERAL	510211006-PS		B	13 OF 17
INITIAL APPR	ISHWARG	DATE	2021/08/18					

12.0 NOTES

1. There is no influence in the product performance though the black spot or bubble etc. might be confirmed to the plastic part of this product and the shade might be different (discoloration by secular distortion etc.).
2. A few scratches may be confirmed to the surface of the housing and the plating of this product, however, there is no problem in the product performance.
3. Discoloration of the plastic part of this product can result from exposure to ultraviolet light. There is no problem in the product performance.
4. Please do not conduct any washing process on the connectors because it may damage the product's function.
5. Please do not use the connectors in a condition where the wire, PWB, or the contact area is experiencing a sympathetic vibration of wires and PWB, and constant movement of devices. This may cause a defect in the contact due to the contact area being worn down. Therefore, please fix wires and PWB on the chassis, and reduces sympathetic vibration.
6. Please do not do work that the load hangs in the connectors like the carrying of the substrate etc. with the connectors engages. There is a case where it causes the connectors damage etc.
7. After mated the connectors, please do not allow the PWBs to apply pressure on the connectors in either the pitch direction, the span direction or rotational direction. It may cause damage to the connectors and may crack the soldering.
8. Please try to prevent any external forces or shock from being applied to the connectors while the cable assembly is in process, when it is being packaged, or while it is in transportation. This may cause deformation and damage to the connectors and cause a defect in the product's performance.
9. When using this product, please ensure that the specification for rated current per circuit is followed. Do not allow the sum of the current used on several circuits to exceed the maximum allowable current.
10. This product is not designed for the mating and unmating of the connectors to be performed under the condition of an active electrical circuit. It may cause a spark and product defect if the connectors are mated and unmated in this way.
11. The applicable wire for this connector, in principle, is tin-plated copper stranded wire. Please consult us and evaluate it in advance when using other wires.
12. Please keep enough clearance between connectors and chassis of your application in order not to apply pressure on the connectors.
13. Please tie the cable at least 50mm away from the edge of the connectors and try to ensure that the force is applied evenly on all of the wires.
14. When extracting a crimp terminal from the housing using a jig, it may deform the housing lance and therefore reduce the terminal retention force enormously after re-inserting of the terminal. Therefore, please ensure to use a new housing after repairing the crimp terminals.

[PicoBlade 1.25 W-t-B Connector System Web Page](#)

[TABLE OF CONTENT](#)

THIS DOCUMENT CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION

REVISION DESCRIPTION		PRODUCT SPECIFICATION FOR PICOBLADE 1.25 W/B TH VT TYPE GOLD PLATING CONNECTOR					
CHANGE NO.	690784						
REVISED BY	PRAMOD	DATE	2022/01/04	DOC TYPE	DOC TYPE DESCRIPTION	DOC PART	SERIES
REV APPR BY	MRAMAKRISHNA	DATE	2022/01/05	PS	PRODUCT SPECIFICATION WORD	000	51021
INITIAL RELEASE				CUSTOMER	DOCUMENT NUMBER	REVISION	SHEET
INITIAL DRWN	PRAMOD	DATE	2021/08/17	GENERAL	510211006-PS	B	14 OF 17
INITIAL APPR	ISHWARG	DATE	2021/08/18				

15. The cable assembly should not have a constant stress or pulling force applied on it when it is in the mated condition. This phenomenon may damage the contact area or wiring area (crimping). Therefore, when designing the wire positioning, please ensure that there is enough length of wire to avoid stress on the connectors.
16. Please hold wires all together lightly and withdraw slowly, axially and straightly. Please avoid withdrawing them with an angle and roughly. That might cause damage to connector.
17. Do not deform the movable part as lock part and lance part of Plug. HS'G and terminals on purpose. It would lead to product failure.
18. If you leave any soldering area on this product open, there may be the possibility of a missing terminal short circuiting between pins, terminal buckling or the potential for the connectors to come off of the PWB. Therefore, please solder all of the terminals on the PWB.
19. If there is accidental contact with the connectors while it is going through the reflow machine, there may be deformation or damage caused to the connectors. Please check to prevent this.
20. Please do not touch the terminals before or after mounted the connectors onto the PWB.
21. Please do not stack the PWB directly after mounted the connectors on it.
22. Please conduct it under the condition of the specifications when repairing by hand soldering iron after mounting. In the case of practicing beyond the condition, the backlash, the change in the contact gap, the deformation of the mold and the melting, etc. may cause damage.
23. When conducting manual repairs using a soldering iron, please do not use more solder and flux than needed. This may cause solder wicking and flux wicking issues, and it will eventually cause a contact defect and functional issues.
24. Please do not use the connectors alone to provide mechanical support for the PWB. Please ensure that there is a fixed structure on the phone chassis or other component support for the PWB.
25. In the case of changing our recommended board pattern size and designing, please consult in advance because it may cause a fatal defect.
26. It is necessary to consult separately when mount product on a special PWB or FPC.





[PicoBlade 1.25 W-t-B Connector System Web Page](#)

[TABLE OF CONTENT](#)

THIS DOCUMENT CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION

REVISION DESCRIPTION		PRODUCT SPECIFICATION FOR PICOBLADE 1.25 W/B TH VT TYPE GOLD PLATING CONNECTOR					
CHANGE NO.	690784						
REVISED BY	PRAMOD	DATE	2022/01/04	DOC TYPE	DOC TYPE DESCRIPTION	DOC PART	SERIES
REV APPR BY	MRAMAKRISHNA	DATE	2022/01/05	PS	PRODUCT SPECIFICATION WORD	000	51021
INITIAL RELEASE				CUSTOMER	DOCUMENT NUMBER	REVISION	SHEET
INITIAL DRWN	PRAMOD	DATE	2021/08/17	GENERAL	510211006-PS	B	15 OF 17
INITIAL APPR	ISHWARG	DATE	2021/08/18				

27. Load the connector into the PWB straight down. Do not tilt or squeeze the connector in wrong directions.
- ※When touching the connector, be sure not to touch the contacts.
 - ※Load the solder tails straightly into the PCB.
 - ※Do not apply force in such directions that would damage the solder tails.
 - ※In case you push the solder tails in such directions, the pin deformations and pin fallout would occur and damage the connector.

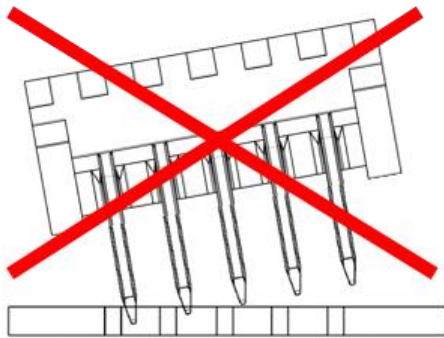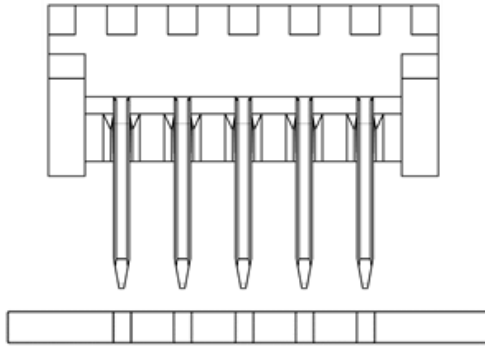

[PicoBlade 1.25 W-t-B Connector System Web Page](#)



[TABLE OF CONTENT](#)

THIS DOCUMENT CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION

PRODUCT SPECIFICATION FOR PICOBLADE 1.25 W/B TH VT TYPE GOLD PLATING CONNECTOR

REVISION DESCRIPTION								
CHANGE NO.	690784							
REVISED BY	PRAMOD	DATE	2022/01/04	DOC TYPE	DOC TYPE DESCRIPTION		DOC PART	SERIES
REV APPR BY	MRAMAKRISHNA	DATE	2022/01/05	PS	PRODUCT SPECIFICATION WORD		000	51021
INITIAL RELEASE				CUSTOMER	DOCUMENT NUMBER		REVISION	SHEET
INITIAL DRWN	PRAMOD	DATE	2021/08/17	GENERAL	510211006-PS		B	16 OF 17
INITIAL APPR	ISHWARG	DATE	2021/08/18					

28. Please do the mating as much as possible to along to mating axis. At this time, positioning each side of external faces of receptacle housing and plug and push to mating until both connectors strikes each other (complete mating position). In the case of diagonal mating, touch with external faces with receptacle housing and plug under the angle of 10° lightly and push to mating in order to avoid the connector break.

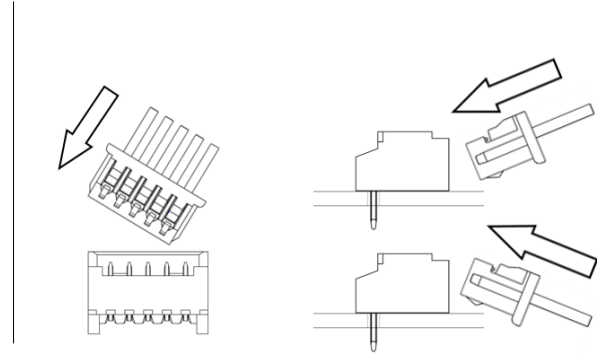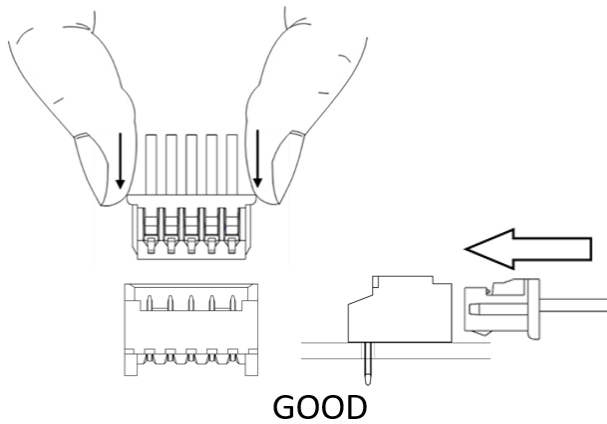

29. The housing material of this product is made from a high heat resistant polyamide. The soldering condition and the water absorption properties of the housing material may cause blistering on the housing surface. Because this blister is not caused by property change, it does not damage the product's features.

30. Because the receptacle housing material of this product is using polyamide, the water absorption status of the housing material might change insertion force, withdrawal force, or the feeling of insertion. Its excessive water absorption may cause to interfere with insertion a little bit or to weaken the click feeling of the lock when mating. However, it does not damage the product's features and functions.

[PicoBlade 1.25 W-t-B Connector System Web Page](#)

[TABLE OF CONTENT](#)

THIS DOCUMENT CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION

PRODUCT SPECIFICATION FOR PICOBLADE 1.25 W/B TH VT TYPE GOLD PLATING CONNECTOR

REVISION DESCRIPTION									
CHANGE NO.	690784								
REVISED BY	PRAMOD	DATE	2022/01/04	DOC TYPE	DOC TYPE DESCRIPTION		DOC PART	SERIES	
REV APPR BY	MRAMAKRISHNA	DATE	2022/01/05	PS	PRODUCT SPECIFICATION WORD		000	51021	
INITIAL RELEASE				CUSTOMER		DOCUMENT NUMBER		REVISION	SHEET
INITIAL DRWN	PRAMOD	DATE	2021/08/17	GENERAL		510211006-PS		B	17 OF 17
INITIAL APPR	ISHWARG	DATE	2021/08/18						